

## Introduction

This e-SMART MPPT (maximum Power Point Tracking) solar charge controller is a smart solar controller with automatic recognition function, smart charging and discharging function, three stages charging function to protect battery. It can increase 30%~60% efficiency than traditional PWM controller. It supports many kinds of batteries. It also has [RS232 communication](#) function.

## Features

1. MPPT charging mode, peak efficiency up to 99%, saving 30%~60% solar panel than traditional PWM controller.
2. DC12V/24V/48V battery system automatic recognition, users can use it in different system conveniently.
3. Maximum PV input voltage up to DC100V.
4. Three stages charge: fast charge(MPPT), constant voltage charge, floating charge, It can protect batteries well .
5. Three option of discharge: on mode and off mode and PV voltage(solar) control mode.
6. Users can choose 4 kinds of commonly standard batteries(Sealed lead acid, Vented, Gel, NiCd). Other kinds of batteries can be defined by users.
7. Digital tube can display battery voltage and charging current. The software can display various parameters such as model number, PV input voltage, battery type, battery voltage, charging current, charging power, working condition.
8. RS232 communication, we can offer communication protocol also, it's convenient for user's integration management.
9. This controller can be paralleled infinitely.
10. [CE and RoHS Certifications](#) are approved. We can help clients to approve other certifications.
11. 2 years warranty; 3~10 years extended technical service.

## Parameters


Selectable Battery Types (Default Gel battery)	12V/24V/48V system	Sealed lead acid, Vented, Gel, NiCd battery (Other types of the batteries also can be defined)□				
Constant Voltage	12V/24V/48V system	Please check the charge voltage according to the battery type form.				
Floating Charge Voltage	12V/24V/48V system					
Rated Input Current	12V/24V/48V system	15A	20A	25A	30A	40A
Current-limit Protection	12V/24V/48V system	20A	25A	30A	35A	45A
Temperature Factor	12V/24V/48V system	±0.02%/°C				
Temperature Compensation	12V/24V/48V system	14.2V-(The highest temperature-25°C)*0.3				
Output Ripples(peak)	12V/24V/48V system	200mV				
Output Voltage Stability Precision	12V/24V/48V system	≤±1.5%				
Output Discharge Characteristics						

Output voltage	Base on battery voltage	
Low voltage output Protection point	Default 10.5V; Recovery 11V; It can be adjustable.	
Rated output Current	30A	
The output control	On mode, Off mode, PV voltage control mode	
Output control set mode	Controller button or PC software	
Display		
LED digital tube display	Battery voltage, Charge current	
LED light display	Charging indicator light, LOAD indicator light	
PC communication port	RS232	
Protection		
Low input voltage protection	Check the input characteristics	
High input voltage protection	Check the input characteristics	
Charge overpower protection	yes	
Discharge low voltage protection	yes	
Discharge high current protection	yes	
Temperature protection	yes	
Other Parameters		
Noise	≤40dB	
Thermal heat-dissipating method	Itself cooling	Fan cooling
Components	Imported material With EU standards.	
Certification	CE\FCC\RoHS	
Physical		
Measurement D x W x H(mm)	205*168*60	
package size D x W x H(mm)	265*196*110	
N.G(KG)	1.8kg	
G.N(KG)	2kg	
Mechanical Protection	IP25	
Environment		
Humidity	0~90%RH ( no condense)	
Altitude	0~3000m	
Operating Temperature	-20°C ~ +50°C	
Storage Temperature	-40°C ~ +75°C	
Atmospheric Pressure	70~106kPa	

## Products Package

Number	quantity	Items included
1	1 pc	Controller color (blue or green is optional OEM ODM order is highly welcome )
2	2 pc	Hangers (used for controller hanging on the wall)
3	4 set	Screw
4	1 pc	RJ45 to RS232 cable
5	1 pc	Battery temperature sensor wire
6	2 pc	Fuse DC output
7	1 pc	User instruction manual
8	1 pc	CD



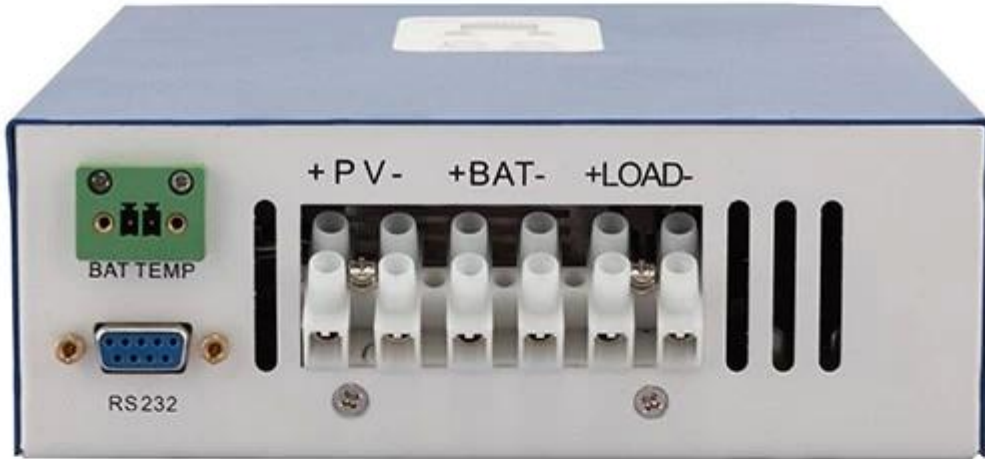








## Controller PC upper software and testing software

1. The first picture show solar controller working status(charge and discharge), PV voltage, charge voltage, charge current etc. Users can choose the type of the batteries, DC-load output control method.
2. We provide [PC upper software](#). Testing software is not including. (user's PC has software development platform, if needed, please apply for it)

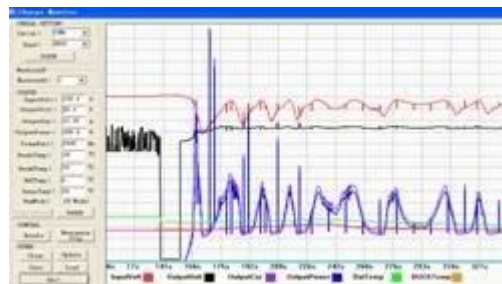

## **Information display and parameter setting**

1. ENTER1 button: press left ENTER1 show 2 digital battery voltage (if it is charging, then shows 2 digital charge voltage), for example, the battery voltage or charge voltage is 13.5V, it shows 13, please see Figure 2.1; Press ENTER1 a little bit longer, users can set battery types.

2. ENTER2 button: press right ENTER2 show 2 digital battery current (if it is not charging, then it display 00, if the charge current is 22.5A, then it shows 22, please see Figure 2.2); press ENTER2 button a little bit longer, DC load control can be set (On mode, Off mode, PV voltage control mode)

Please see more details in the user manual.



## Applications





