

## The Connection diagram:



## Features:

1. MPPT charging mode, peak efficiency up to 99%, saving 30%~60% solar panel than traditional PWM controller.
2. DC12V/24V/48V battery system automatic recognition, users can use it in different system conveniently.
3. Maximum PV input voltage up to DC100V.
4. Three stages charge: fast charge(MPPT), constant voltage charge, floating charge, It can protect batteries well .
5. Three option of discharge: on mode and off mode and PV voltage(solar) control mode.
6. Users can choose 4 kinds of commonly standard batteries(Sealed lead acid, Vented, Gel, NiCd). Other kinds of batteries can be defined by users.
7. Digital tube can display battery voltage and charging current. The software can display various parameters such as model number, PV input voltage, battery type, battery voltage, charging current, charging power, working condition.
8. RS232 communication, we can offer communication protocol also, it's convenient for user's integration management.
9. This controller can be paralleled infinitely.

10. CE and RoHS Certifications are approved. We can help clients to approve other certifications.

11. 2 years warranty; 3~10 years extended technical service.

## Parameters:

MPPT solar controller modes I-P-e-SMART-12V/24V/48V-series		25A
Charge mode	MPPT(maximum power point tracking)	
Charge method	Three stages: constant current(MPPT),constant voltage,floating charge	
System type	DC12V/24V/48V	Automatic recognition
System voltage	12V system	DC9V~DC15V
	24V system	DC18V~DC30V
	48V system	DC36V~DC60V
Soft start time	12V/24V/48V system	≤3S
Dynamic response recovery time	12V/24V/48V system	500us
MPPT efficiency	12V/24V/48V system	≥96.5%,≤99%
INPUT CHARACTERISTICS		
MPPT working voltage range	12V system	DC14V~DC100V
	24V system	DC30~DC100V
	48V system	DC60~DC100V
Low input voltage protection point	12V system	DC14V
	24V system	DC30V
	48V system	DC60V
Low input voltage Recovery point	12V system	DC18V
	24V system	DC34V
	48V system	DC65V
High input voltage protection point	12V/24V/48V system	DC110
High input voltage recovery point	12V/24V/48V system	DC100V
Maximum PV power	12V system (W)	355
	24V system (W)	710
	48V system (W)	1420
CHARGE CHRECTRESTICS		
Selectable Battery Types (Default Gel battery)	12V/24V/48V system	Sealed lead acid, Vented, Gel, NiCd battery (Other types of the batteries also can be defined)

Constant Voltage	12V/24V/48V system	Please check the charge voltage according to the battery type form.	
Floating Charge Voltage	12V/24V/48V system		
Rated Input Current	12V/24V/48V system	25A	
Current-limit Protection	12V/24V/48V system	30A	
Temperature Factor	12V/24V/48V system	±0.02%/°C	
Temperature Compensation	12V/24V/48V system	14.2V-(The highest temperature-25°C)*0.3	
Output Ripples(peak)	12V/24V/48V system	200mV	
Output Voltage Stability Precision	12V/24V/48V system	≤±1.5%	
Output Discharge Characteristics			
Output voltage		Base on battery voltage	
Low voltage output Protection point		Default 10.5V; Recovery 11V; It can be adjustable.	
Rated output Current		30A	
The output control		On mode, Off mode, PV voltage control mode	
Output control set mode		Controller button or PC software	
Display			
LED digital tube display		Battery voltage, Charge current	
LED light display		Charging indicator light, LOAD indicator light	
PC□communication port□		RS232	
Protection			
Low input voltage protection		Check the input characteristics	
High input voltage protection		Check the input characteristics	
Charge overpower protection		yes	
Discharge low voltage protection		yes	
Discharge high current protection		yes	
Temperature protection		yes	
Other Parameters			
Noise		≤40dB	
Thermal heat-dissipating method		Itself cooling	Fan cooling
Components		Imported material With EU standards.	
Certification		CE\FCC\RoHS	
Physical			
Measurement D x W x H(mm)		205*168*60	
package size D x W x H(mm)		265*196*110	
N.G(KG)		1.8kg	
G.N(KG)		2kg	
Mechanical Protection		IP25	
Environment			
Humidity		0~90%RH ( no condense)	
Altitude		0~3000m	
Operating Temperature		-20°C ~ +50°C	
Storage Temperature		-40°C ~ +75°C	
Atmospheric Pressure		70~106kPa	

Remarks□

1. The specification is only for reference. Subject to change without prior notice
2. We provide OEM and ODM service. The 36V/72V/96V model also can be customized for you.

## Products Package


Number	quantity	Items included
1	1 pc	Controller color (blue or green is optional OEM ODM order is highly welcome )
2	2 pc	Hangers (used for controller hanging on the wall)
3	4 set	Screw
4	1 pc	RJ45 to RS232 cable
5	1 pc	Battery temperature sensor wire
6	2 pc	Fuse□DC output□
7	1 pc	User instruction□manual□
8	1 pc	CD

Controller PC upper software and testing software

1. Controller PC upper software and testing software can display information. Users can set parameters via PC upper software.



Graphical: PC upper software

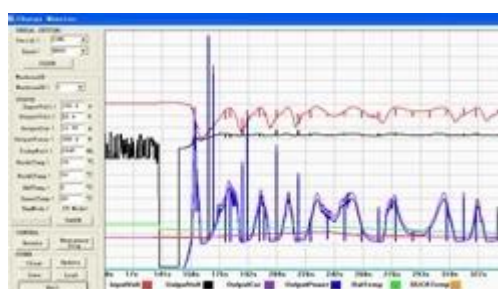

Graphical: testing software

1.1 The first picture show solar controller working status(charge and discharge), PV voltage, charge voltage, charge current etc. Users can choose the type of the batteries, DC-load output control method.

1.2 We provide PC upper software. Testing software is not including. (user's PC has software development platform, if needed, please apply for it)

## 2. Information display and parameter setting.



Figure 2.1



Figure 2.2

2.1 ENTER1 button: press left ENTER1 show 2 digital battery voltage (if it is charging, then shows 2 digital charge voltage), for example, the battery voltage or charge voltage is 13.5V, it shows 13, please see Figure 2.1; Press ENTER1 a little bit longer, users can set battery types.

2.2 ENTER2 button: press right ENTER2 show 2 digital battery current (if it is not charging, then it display 00, if the charge current is 22.5A, then it shows 22, please see Figure 2.2); press ENTER2 button a little bit longer, DC load control can be set (On mode, Off mode, PV voltage control mode)

Please see more details in the user manual.

### Other detailed parameters

Please see the outline of the design, technical documents, user manuals etc.  
Research and development department made 2th version on May 5, 2014.