

eSmart3 eSmart1 eSmart2 mppt eSmart mppt



MPPT Solar Controller
12V24V36V48 50A-60A





MPPT Solar Controller
12V24V36V48 50A-60A



□□□

















1. MPPT效率MPPT效率 $\geq 99.5\%$ 转换效率 $\geq 98\%$
2. 转换效率 $\geq 99.5\%$
3. 转换效率 $\geq 99.5\%$ / PV转换效率 $\geq 99.5\%$ PV + 转换效率
4. 转换效率 $\geq 99.5\%$
5. 转换效率 $\geq 99.5\%$ Seal \ Gel \ Flooded 转换效率 $\geq 99.5\%$
6. 转换效率 $\geq 99.5\%$ PV 转换效率 $\geq 99.5\%$
7. 转换效率 $\geq 99.5\%$
8. RS485 转换效率 $\geq 99.5\%$
9. PC 转换效率 $\geq 99.5\%$ WiFi 转换效率 $\geq 99.5\%$ APP 转换效率
10. CE RoHS FCC 转换效率 $\geq 99.5\%$
11. 转换效率 $\geq 99.5\%$ 2 转换效率 $\geq 99.5\%$ 2 10 转换效率 $\geq 99.5\%$

MPPT □□□□□















Off Grid Solar System CPU



□□□□□□□□




LCD□□□□

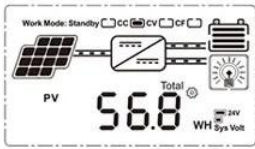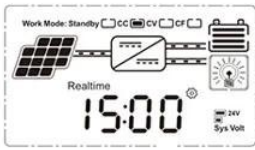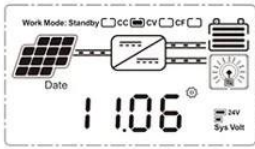

On	Mean "ON"	FLD	Mean "FLD"
OFF	Mean "OFF"	GEL	Mean "GEL"
USER	Mean "USER"	SEL	Mean "SEL"

LOAD

LOAD

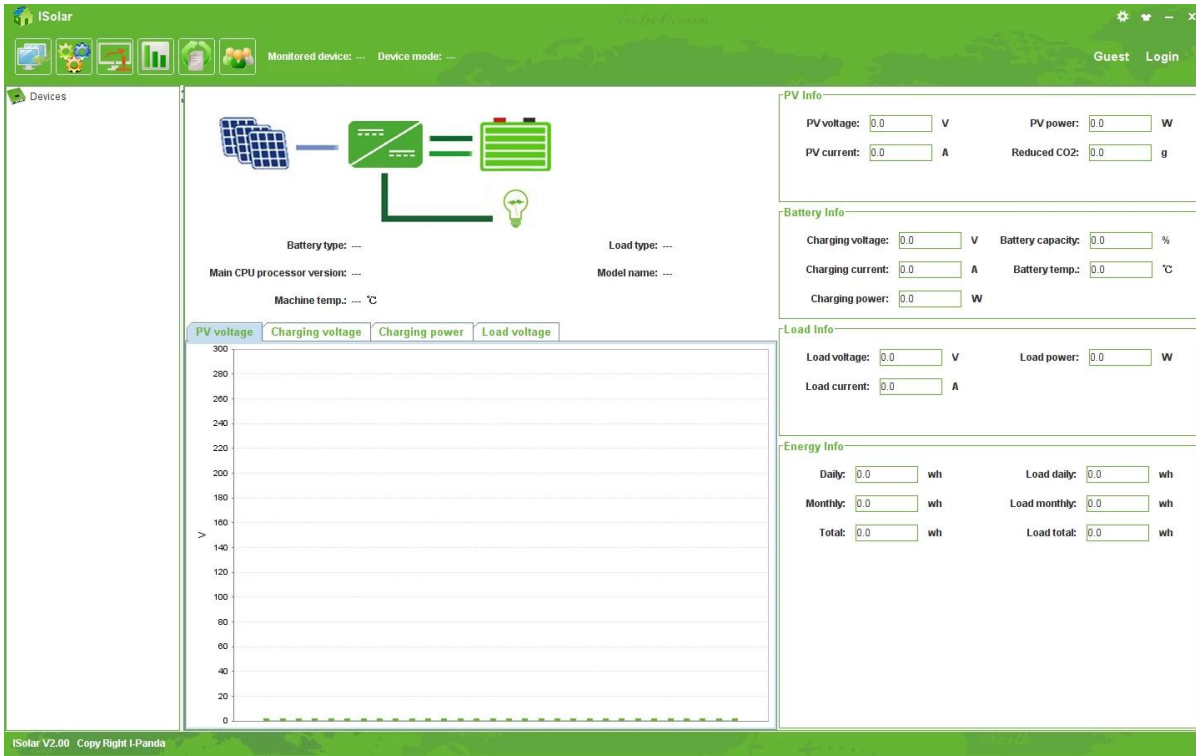

PC_SolarEagle

PV LOAD

	S320A	S330A	S340A	S350A	S360A
MPPPT	MPPT				
	≥99.5%				
	0.5W/1.2W				
PV (VO)	DC150V				
	+ 3V				
	+ 2V				
	DC150V				
V	12V	260	390	520	780w ^
	24V	520	780	1040	1300w ^
	36V	780	1170	1560	1950w ^
	48V	1040	1560	2080	2600w ^
A	20A 30A 40A 50A 60A				
	30A 40A 50A 60A				
display	40A 60A				
	PV +				
display	LCD				
display	8/RJ45 / RS485 / PC / WIFI / APP				
temp	-20°C + 50°C				
	-40°C + 75°C				