Introduction

This is a<u>solar charge controller 20A ~30A</u>that have automatic max. power point tracking function with high efficiency that almost 30%~60% higher than traditional charge controller. It also features the functions of system voltage auto recognition, wide rang of PV input ,charge for all kinds of battery,automatic discharge control,RS 232 / LAN communication function and so on. It is very high-end product for solar market with its best partner<u>l-P-Black model Inverter/Charger/UPS</u>.

Application

- 1. Industrial, commercial, household off grid solar energy generation system
- 2. Movable off grid solar energy generation system
- 3. Communication base stations
- 4. New energy education business
- 5. Solar Monitoring System
- 6. Solar Street Lighting System

Reasons to choose

- 1. 30%-60% solar panels saved
- 1) Conversion efficiency 95%-99%, take most from solar panels
- 2) Charge for all kinds of batteries, 3 charge stage to protect battery.

Reduce consumption, cost saved.

- 2. Data monitor and set. Parameters from solar panels like charge current/voltage and IP gate address, total generation power, etc can be showed. 4 kinds DC load control, automaticly save ernergy both from human and solar.
- 3. Lan commucation and RS232 port.
- 4. Software to monitor 100pcs equipments at the same time on one screen on a computer.

Features

- 1. MPPT charge mode, conversion efficiency upto 99%
- 2. 12V/24V/48V system auto recognize;
- 3. Wide range of PV input with max. is DC150V.
- 4. Unlimited parallel connection
- 5. Journal function, Save function set, Date, time, Generating capacity and so on.
- 6.Charge mode: three stages (fast charge ,constant charge ,floating charge) .lt prolongs service life of the batteries .
- 7.Discharge mode: ON/OFF mode, double time control mode,PV voltage control mode ,PV voltage+time delay mode and so on .
- 8.Recommended battery types: sealed lead acid, vented, gel, NiCd battery. Other types of the batteries can also be defined.
- 9.Most information could be provide by LCD and LED like: model no.,PV input voltage,battery type,battery voltage,charging current,charging power,working status and so on. Also customer's information like company name,website and logo can be added into Solar Eagle software.
- 10.RS232 and LAN communication port. IP and Gate address could be user define it satisfy global area. And communication protocol can be provided to help customer manage all information .
- 11. The upper computer software is displayed in 11 languages, it could show work status and set parameters of the discharge system.
- 12. With intelligent design, the device can be upgraded online lifelong.
- 13.Adopting the well-known brand components, the devices can suffer the temperature not less than 105°C. The service life is designed to use for 10 years in theory.
- 14.Compliance with the 2002/95/EC environment protecting demand, doesn't include the Cadmium, hydride and fluoride etc material
- 15.Equipment integrity: controller + CD-ROM(microcomputer software) + communication wire + temperature sensing wire+Anderson terminals;
- 16.CE,ROHS certifications approved.

Paramete

| amete | | | | |
|--|---------------------------------------|--|---------------------------------|----------------|
| MODEL:I-P-SMART2 SERIE | | 20A | 25A | 30A |
| Charge Mode | | Maximum Power Point Tracking | | |
| Discharge | | Intelligent control | | |
| System Type | | 12V 24V 48V Automatic recognition | | |
| Soft Start Time | | ≤10S | | |
| Dynamic Response Recovery Time | | 500us | | |
| Conversion E | fficiency | ≥96.5%,≤99% | | |
| PV Modules Util | | ≥99% | | |
| | | JT CHARACTERISTICS | | |
| MPPT Working | 12V system | DC18V~DC150V | | |
| Voltage and Range | 24V system | DC34~DC150V | | |
| voicage and range | 48V system | DC65~DC150V | | |
| Low Voltage Input Protection Point | 12V system | DC16V | | |
| | 24V system | DC30V | | |
| | 48V system | DC60V | | |
| Low Voltage Input | 12V system | DC22V | | |
| Recovery Point | 24V system | DC34V | | |
| May DCV | 48V system | DC65V | | |
| Max. DC V | | DC160V | | |
| Input Overvoltage I | | | DC150 | |
| Input Overvoltage | · · · · · · · · · · · · · · · · · · · | 2061// | DC145V 357W | 429W |
| Max DV Power | 12V system 24V system | 286W 572W | 715W | 858W |
| Max. PV Power | 48V system | 1144W | 1430W | 1716W |
| | | RGE CHARACTERISTIC | | 1/1000 |
| | | | | attery/Default |
| Selectable Bat | tery Types | Sealed lead acid, vented, Gel, NiCd battery(Default type is GEL battery) | | |
| Other types of Battery Setting | | User-defined constant/floating | | |
| | | Constant charge charge voltage range between | | |
| | | DC10V~DC15 (based on 1 | | |
| | | Floating charge battery) | | |
| Battery Type | e Setting | 12V/24V/48V SYS | Controller and ι | upper monitor |
| Charge Type | | 12V/24V/48V SYS | Three Stages :Fast | |
| | | | charge/Constant charge/Floating | |
| | | | char | |
| Rated Output Current | | 20A | 25A | 30A |
| Current-limiting | | 20A | 25A | 30A |
| Temperature Factor | | ±0.02%/°C | | |
| Temperature Compensation | | 14.2V-(The highest temperature-25°C)*0.3 | | |
| Output Ripples(peak) | | 200mV | | |
| Output Voltage Stability Precision | | ≤±1.5% | | |
| Charge voltage Peak-Peak Ripple Charger voltage accuracy | | 200mV ≤±1.5% | | |
| Charger voitag | | L ARGE CHARACTERIST | | |
| Sotting C | | | Controller or LAN | |
| Setting Control Max discharge current | | 30A | | |
| Max discharge current Max discharge power | | 420W | 840W | 1680W |
| Discharge protection | | 72000 | fuse 40A*2 | 100044 |
| Discharge protection Double-time control | | On in morning ,off in morning / On in night ,off in night | | |
| ON / OFF mode | | ON / OFF | | |
| PV voltage control | | PV voltage on,PV voltage off | | |
| PV voltage / time delay control | | PV voltage on,time delay off | | |
| Discharge voltage protection | | Output off when it under setting voltage; Factory set is | | |
| | | 10.5 .(Note : set based on 1 battery) | | |
| | | 10.5 . (Note : Set based on 1 battery) | | |

| COMMUNICATION PORT | | | | | |
|---|---|--|--|--|--|
| RS232 Communication | Chose COM communication | | | | |
| 113232 Communication | Set IP and Gate address for controller and solar eagle | | | | |
| LAN Communication | ;Then chose TCP communication | | | | |
| | PROTECTIONS | | | | |
| | | | | | |
| Input Low Voltage Protection Input Overvoltage Protection | - | | | | |
| | Charletha in lantment above etavistica | | | | |
| Input Polarity Reversal Protection | Check the in/output characteristics | | | | |
| Output Overvoltage Protection | | | | | |
| Output Polarity Reversal Protection | | | | | |
| Short-circuit Protection | Recover after eliminating the Short-circuit fault, no problem for long term Short-circuit | | | | |
| Temperature Protection | 95℃ | | | | |
| Temperature protection | Above 85°C, decrease the output power, decrease 3A | | | | |
| remperature protection | per degree. | | | | |
| 0 | THER PARAMETERS | | | | |
| Noise | ≤40dB | | | | |
| | Forced air cooling, fan speed rate regulated by | | | | |
| Thermal methods | temperature, when inner temperature is too low, fan | | | | |
| Thermal methods | ran slowly or stop; when controller stop working, fan | | | | |
| | also stop ran. | | | | |
| | World brand raw materials. Compliance with EU | | | | |
| | standards. Meet the 2002/95/EC without cadmium | | | | |
| Environment Protection | hydride, fluoride, peculiar smell and toxic | | | | |
| | substances.All rated temperature of electrolytic | | | | |
| | capacitors not less than 105℃ | | | | |
| PHYSICAL | | | | | |
| Measurement DxWxH (mm) | 270*185*90 | | | | |
| N.G(kg) | 2.1 | | | | |
| G.N(kg) | 2.4 | | | | |
| Color | Blue/Green (optional) | | | | |
| Safety | CE, RoHS, PSE,FCC | | | | |
| EMC | EN61000 | | | | |
| Type of Mechanical Protection | IP21 | | | | |
| ENVIRONMENT | | | | | |
| Humidity | 0~90%RH (no condense) | | | | |
| Altitude | 0~3000m | | | | |
| Operating Temperature | -20°C ~ +40°C | | | | |
| Storage Temperature | -40°C ~ +75°C | | | | |
| Atmospheric Pressure | 70~106kPa | | | | |
| / terrosprierie i ressure | 70 10001 0 | | | | |

Note: OEM and ODM service are provided. The 36V/72V/96V model also can be custom made for you.

Product Parts

| NO. | Quantity | Description | | |
|-----|----------|---|--|--|
| 1 | 1 pc | <u>Charge controller</u> | | |
| 2 | 2 pc | Gallow pulley (For install the controller on the wall) | | |
| 3 | 4 set | Screw (For install the controller on the wall) | | |
| 4 | 1 pc | 232 turn to RJ45 communication cable | | |
| 5 | 1 pc | User manual | | |
| 6 | 1 pc | Temperature sensing wire | | |
| 7 | 2 pc | Fuse wire | | |



Upper Computer

Package


Upper Computer Software and Test Software






The interface of upper computer software working state

The interface of upper computer software parameter setting state

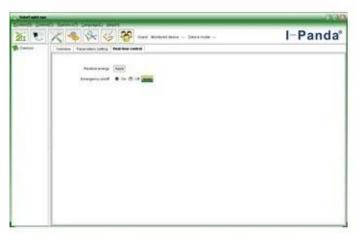

Upper computer software on/off interface and generating capacity record clean interface

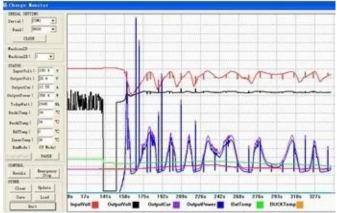

The interface of test software working state

MPPT Connection



Certificates

ISO2008

ISO2004

<u>CE</u>

FCC

ROHS

Service and Contact

1. Warranty

1.2 years warranty, lifelong technical assistance.

2. Conditions and Terms

- 2.1 The warranty starts from the delivery date from our factory.
- 2.2 During the warranty, any defective product will get repaired or replaced for free.
- 2.3 The warranty is unavailable for those products which are broken by the violence or the

carelessness or repaired or altered without the authorization.

3. Lead Time

- 3.1 Sample orders will be delivered from our factory within 5-7 working days.
- 3.2 General orders will be delivered from our factory within 7-15 working days.
- 3.3 Big orders will be delivered from our factory within 25 working days at most.

4. Shipment

- 4.1 By EMS, DHL, FedEx or other express.
- 4.2 By our forwarding agent(by air or by sea).
- 4.3 By your own forwarding agent.

5. OEM and ODM

5.1 This page shows basic data, we can provide OEM, ODM service for you.