This power inverter series I-P-TPI2-1000W-6000W is adopted the world's leading low frequency inversion

technical solutions This series of inverter has the advantages of high conversion efficiency, low power consumption, super load-carrying ability, and large charging current. . Users can set it to sleep mode and normal

working mode according to the AC loads. Users also can set the output priority (AC first or DC first) and choose

the output frequency 50Hz or 60Hz. It's our second generation TPI series. They are best choice for solar, wind

generation system, home, office standby UPS power supply and DC to AC projects, keep 24hours have power.

In the above application fields, this series of inverter is suitable for all kinds of inductive loads, capacitive load and

resistive load such as TV, air conditioner, refrigerator and washing machine.


Application

Industrial, commercial, household back-up power supply Movable AC supply power Main supply power for industrial products Off-grid energy generator system

Function

1.DC/AC Conversion Function

It can be set to normal working mode (on the panel turn the button to "ON") or sleep mode (on the panel turn the button to S-ON)

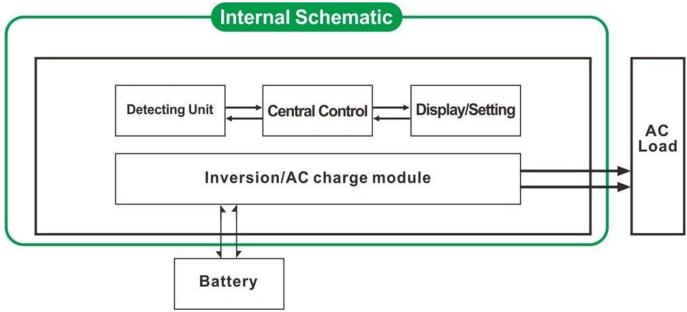

1.1 Normal working mode (ON): No matter it's connected AC loads or not

the inverter always convert DC to AC. The LCD of the inverter display the output voltage. The power consumption

in normal working mode is a little higher than in sleep mode

1.2 Sleep mode (S-ON)□If the power of the connected AC loads is lower than 5% of the rated power of the

inverter, there is no output from the inverter. The LCD of it shows 0. Only the chip of inverter is working. The

power consumption of the inverter is only 1-6W. If the power of the connected AC loads is more than

5%, then

the inverter automatically convert DC to AC to supply power for the loads within 5s. The LCD of it display no output.

2. High-power intelligent charging function

1 ☐ It Can charge 8 kinds of batteries (detail please check parameter)

2 High charging power (detail please check parameter)

3[Three-stage charging mode: Constant current charging stage (CC), Constant voltage charging stage (CV), Float charging stage (CF)




Note: When the battery type is set to "0", it will not charge the battery and charging current is "0". The charging

indicator will not light.

3. UPS function

It can be set as utility first (AC first) battery standby mode or battery first (DC first) utility standby mode.

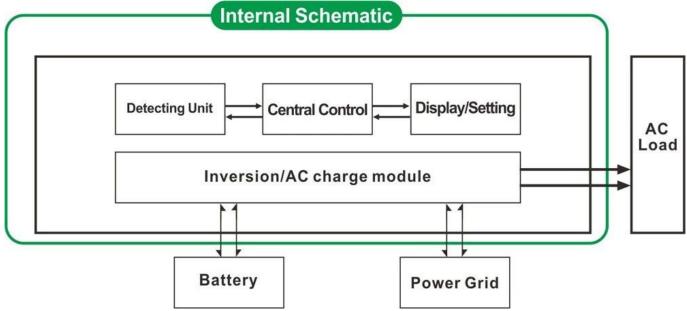

- 3.1. Utility first, battery standby UPS mode (on the panel turn the button to "AC")
- 3.2. Battery first, utility standby UPS mode (on the panel turn the button to "DC").

Features

- 1. Pure sine wave output
- 2. CPU management, intelligent control modular design
- 3. LCD and LED display can show the parameters and inverter working status.
- 4. Users can set it in sleep mode or normal working mode and set output priority (AC first or DC first). The output

frequency (50Hz or 60Hz) can be chosen.

5. High conversion efficiency (87%-98%), low power consumption ($1W\sim6W$ under sleep mode). It is the best

choice of inverters for solar power system

6. The inverter can charge 8 kinds of batteries such as sealed lead acid battery, open lead-acid battery, gel

battery. Kindly note: The lithium battery can be charged also, the related parameters need to be set in factory.

- 7. High charging power and the charging function can be closed
- 8. This series of inverters have strong load-carrying ability and overload capacity. The peak power is 3 times of

the rated output power. For example, 1KW model can drive 1HP air conditioner, 2KW model can drive 2HP air

conditioner, 3KW can drive 3HP conditioner.

9. Adopting the latest American low frequency circuit design, brand new imported electric materials, pure copper

transformer, the system is very stable long service life(more than 5 years under normal use)

10. Perfect protection (low input voltage protection, high input voltage protection, over temperature protection,

short-circuit protection, overload protection)

- 11. EMC LVD RoHS certification approvals
- 12. 2-year warranty and life-time technical assistance.

Specification

Specification	on					
Parameter	Model	1000W				
Rated Output Power		1000W				
Peak Power		3000W				
Battery Volta	ige(DC)	12V or 24V or 48V∏optional∏				
Size W×D×H(mm)		318*218*368				
Packing Size W×D×H(mm)		395*275*520				
Net Weight (kg)		27				
Gross Weight (kg)		29				
Working Mode □Setting□	ON	Normal working r	node			
	S-ON	Sleep Mode 1~6 consumption when load's power higher than				
		5% rated output power, it will start to work automatically				
	OFF	Completely off				
AC Input	Voltage	220V±35% or 110V+35%[optional[
	Frequency	50HZ or 60HZ				
AC Output	Voltage	220V±3% or 230V±3 or 240V±3% or 100V±3% or 110V±3%∏optional∏				
	Frequency	frequency is the same as Under utility mode Frequency 50Hz or 60Hz[optional] in DC/AC convert mode				
Utility charging Battery type "0" means that AC charging function is closed	AC charge current	12V	24V	48V		
	□MAX□	35A	20A	10A		
	Battery type	American gel battery, Wool battery 1, Wool battery2, Sealed Lead Acid Battery, Europe gel battery, Open lead-acid batteries, Calcium Battery, De-Acid Battery or OEM Battery				
	Charging mode	Three-stage charging CC, CV, CF				
	Charging time	Decided by battery capacity and quantity				
	Battery	Automatic detection charge and discharge protection,				
	protection	intelligent management				
UPS	AC	Utility first, battery standby				
priority	DC	Battery first, utility standby				
Display	Display Mode	LCD+LED				
	Display Information	Input voltage□output voltage□output frequency□battery capacity□Load condition□Status Information				
	prinormation	capacity_Load condition_Status information				

Output Wave Type		Pure sine wave		
Overload Ability		□120% 1 min□□130% 10s		
Power	Sleep Mode	1~6W		
Consumption Normal Mode		1~3A		
Conversion Efficiency		87%~98%		
Transfer Time		□5ms □AC to DC / DC to AC□		
Protection		Overload output[]short-circuit[]high-voltage input[]		
		low-voltage input□overheats		
Environment	Temperature	-10°C∏50°C		
	Humidity	10%∏90%		
	Altitude	≤4000m		

Certificates



Certificate Of Registration QUALITY MANAGEMENT SYSTEM

This is to Certify that the Quality Management System

SHENZHEN I-PANDA NEW ENERGY TECHNOLOGY & SCIENCE CO., LTD.

Address:

Block H, Juyin Technology Industrial Park, Buji St., Longgang Dist., Shenzhen, 518000, Guangdong, China.

has been assessed and found to comply with the requirements of:

ISO 9001:2008

(Quality Management System)

Clause 7 permissible Exclusions: Nil Scope of Certification:

Design, Production and Sales of Power Inverter, Solar Controller, Solar Generator System and UPS.

> Sector Code: (ANZSIC CODE: 2859) Certificate Number: CHIN/TW/QMS/00119

Issue no.: 01

Date of approval: 05.07.2014

Revision no: nil

Valid until : 04.07.2017

Revision date: nil

Original Certification Date: 05.07.2014



Surveillance Audit 1st Year

D.C. J.

Managing Director



MS CERTIFICATION SERVICES PVT. LTD.

www.mscertification.net The Certificate is Valid Only if the Annual Surveillance Mark is Signed by Auditor on Original.



Certificate Of Registration

ENVIRONMENTAL MANAGEMENT SYSTEM

This is to certify that the Environmental Management System of

SHENZHEN I-PANDA NEW ENERGY TECHNOLOGY & SCIENCE CO., LTD.

Address:

Block H, Juyin Technology Industrial Park, Buji St., Longgang Dist., Shenzhen, 518000, Guangdong, China.

has been assessed and found to comply with the requirements of:

ISO 14001:2004

(Environmental Management System)

Scope of Certification:

Design, Production and Sales of Power Inverter, Solar Controller, Solar Generator System and UPS.

> Sector Code: (ANZSIC CODE: 2859) Certificate Number: CHIN/TW/EMS/00028

> > Issue no.: 01

Date of approval: 05.07.2014

Revision no: nil

Valid until : 04.07.2017

Revision date: nil

Original Certification Date: 05.07.2014



Managing Director



Surveillance Audit 2nd year

MS CERTIFICATION SERVICES PVT. LTD.

www.mscertification.net

The Certificate is Valid Only if the Annual Surveillance Mark is Signed by Auditor on Original.



Certificate of Compliance

Certificate NO.: BST14050326Y-1EC-1

Applicant : SHENZHEN I-PANDA NEW ENERGY TECHNOLOGY

& SCIENCE CO., LTD.

Bolck H, Juyin Technology Industrial Park, Buji St., Longgang Dist., Shenzhen, Guangdong, China

Manufacturer : SHENZHEN I-PANDA NEW ENERGY TECHNOLOGY

& SCIENCE CO., LTD.

Bolck H, Juyin Technology Industrial Park, Buji St., Longgang Dist., Shenzhen, Guangdong, China

Product Name : PURE SINE WAVE INVERTER WITH CHARGER AND UPS

Trade Name : I-PANDA

Main Test Model : I-P-TPI-6000W

Additional Model: I-P-TPI-1000W, I-P-TPI-2000W, I-P-TPI-3000W,

I-P-TPI-4000W, I-P-TPI-5000W

Test Standard : EN 55022:2010

EN 61000-3-2:2006+A1:2009+A2:2009

EN 61000-3-3:2013 EN 55024:2010

As shown in the

Test Report No. BST14050326Y-1ER-1.

The EUT described above has been tested by us with the listed standards and found in compliance with the council EMC directive 2004/108/EC. It is possible to use CE marking to demonstrate the compliance with this EMC Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production.



CE

Christina Manager May 20, 2014

Shenzhen BST Technology Co.,Ltd.

Add: Building No.23-24, Zhiheng Industrial Park, Guankouer Road, Nantou, Nanshan District, Shenzhen, Guangdong, China Certificate Search: http://www.bst-lab.com. Tel:400-882-9628, 8009990305, E-mail:christina@bst-lab.com



Certificate of Compliance

Certificate NO. : BST14050326Y-1SC-2

Applicant : SHENZHEN I-PANDA NEW ENERGY TECHNOLOGY & SCIENCE

CO., LTD.

Bolck H, Juyin Technology Industrial Park, Buji St., Longgang Dist.,

Shenzhen, Guangdong, China

Manufacturer : SHENZHEN I-PANDA NEW ENERGY TECHNOLOGY & SCIENCE

CO., LTD.

Bolck H. Juyin Technology Industrial Park, Buji St., Longgang Dist.,

Shenzhen, Guangdong, China

Product Name : PURE SINE WAVE INVERTER WITH CHARGER AND UPS

Trade Name : I-PANDA

Main Test Model : I-P-TPI-6000W

Additional Model I-P-TPI-1000W, I-P-TPI-2000W, I-P-TPI-3000W,

I-P-TPI-4000W, I-P-TPI-5000W

Test Standard : EN 60950-1:2006+A11:2009+A1:2010+A12:2011

As shown in the

: BST14050326Y-1SR-2

The EUT described above has been tested by us with the listed standards and found in compliance with the council LVD directive 2006/95/EC. It is possible to use CE marking to demonstrate the compliance with this LVD Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production.






Christina Manager May , 25, 2014

Shenzhen BST Technology Co., Ltd.

Add:Building No.23-24,Zhiheng Industrial Park,Guankouer Road,Nantou,Nanshan District,Shenzhen,Guangdong,China Certificate Search: http://www.bst-lab.com, Tel: 400-882-9628, 8009990305, E-mail:christina@bst-lab.com



FCC VERIFICATION OF CONFORMITY

BST14050326Y-1EC-3

We herewith confirm the following designated product:

Product Name: PURE SINE WAVE INVERTER WITH CHARGER AND UPS

Trade Name: I-PANDA

Main Test Model.: I-P-TPI-6000W

Additional Model: I-P-TPI-1000W, I-P-TPI-2000W, I-P-TPI-3000W,

I-P-TPI-4000W, I-P-TPI-5000W

(Product Identification)

has been tested and found in compliance with the requirements of 47 CFR PART 15 regulation & ANSI C63.4 for the evaluation of Class B of electromagnetic compatibility. It is only valid in connection with the test report number: BST14050326Y-1ER-3.

This device complies with Part 15 of the FCC rules, operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

(Identification of regulations/standards)

This declaration is the responsibility of the manufacturer/importer

SHENZHEN I-PANDA NEW ENERGY TECHNOLOGY & SCIENCE CO., LTD.
Bolck H, Juyin Technology Industrial Park, Buji St.,
Longgang Dist., Shenzhen, Guangdong, China

(Name /Address)

MANUFACTURER / IMPORTER

FC



TEST LABORATORY

This is the results of test that was carried out by Shenzhen BST, from the submitted type samples of the product is in conformity with the specification of the respective standards.

The certificate holder has the right to fix the FCC-mark on the product complying with the required rules

Christina

Manager

May 20, 2014

Shenzhen BST Technology Co.,Ltd.

Add: Building No.23-24, Zhiheng Industrial Park, Guankouer Road, Nantou, Nanshan District, Shenzhen, Guangdong, China, Certificate Search: http://www.bst-lab.com, Tel:400-882-9628, 8009990305, E-mail:christina@bst-lab.com



Certificate of Compliance

Certificate NO.: BST14050326Y-1RC-4

Applicant : SHENZHEN I-PANDA NEW ENERGY TECHNOLOGY

& SCIENCE CO., LTD.

Bolck H, Juyin Technology Industrial Park, Buji St., Longgang Dist., Shenzhen, Guangdong, China

Manufacturer : SHENZHEN I-PANDA NEW ENERGY TECHNOLOGY

& SCIENCE CO., LTD.

Bolck H. Juyin Technology Industrial Park, Buji St., Longgang Dist., Shenzhen, Guangdong, China

Product Name : PURE SINE WAVE INVERTER WITH CHARGER AND UPS

Trade Name : I-PANDA

Main Test Model : I-P-TPI-6000W

Additional Model : I-P-TPI-1000W, I-P-TPI-2000W, I-P-TPI-3000W,

I-P-TPI-4000W, I-P-TPI-5000W

Test Standard : EPA3050B:1996、EN1122B:2001、EPA3052:1996、EPA3060A:1996、

EPA7196A:1992, EPA3540C:1996, EPA8270D:2007,

IEC62321:2008

As shown in the Test Report No.

BST14050326Y-1RR-4.

The EUT described above has been consolidated by us and found in compliance with the council RoHS directive — 2011/65/EU.



RoHS

Christina Manager

May 20, 2014

Shenzhen BST Technology Co.,Ltd.

Add: Building No.23-24, Zhiheng Industrial Park, Guankouer Road, Nantou, Nanshan District, Shenzhen, Guangdong, China Certificate Search: http://www.bst-lab.com. Tel:400-882-9628, 8009990305, E-mail:christina@bst-lab.com

Service

- 1. OEM and ODM orders are provided.
- 2. Power solution consult available based on technical group
- 3. 24 months warranty; lifelong time extended technical service.
- 4. Any of your questions will be guided by professional technical team.

5. Free technical study and discussion on products are provided every year.						