

China factory 12V/24V/48V Automatic MPPT solar charge controller 60a

Introduction







Core properties of mppt charger controller

1. Conversion efficiency 95%-99%, take most from solar panels
2. Charge for all kinds of batteries, 3 charge stage to protect battery.
3. Data monitor and set. Parameters from solar panels like charge current/voltage and IP gate address, total generation power, etc can be showed. 4 kinds DC load control.
4. Lan commucation and RS232 port.
5. Software to monitor 100pcs equipments at the same time on one screen on a computer.

Features of mppt charger controller

1. [MPPT charge](#) mode,conversion efficiency upto 99%
2. 12V/24V/48V system auto recognize;
3. Wide range of PV input with max. is DC150V .
4. Unlimited parallel connection
5. Journal function , Save function set ,Date ,time ,Generating capacity and so on .
- 6.Charge mode: three stages (fast charge ,constant charge ,floating charge) .It prolongs service life of the batteries .

7. Discharge mode: ON/OFF mode, double time control mode, PV voltage control mode, PV voltage+time delay mode and so on.
8. Recommended battery types: sealed lead acid, vented, gel, NiCd battery. Other types of the batteries can also be defined.
9. Most information could be provided by LCD and LED like: model no., PV input voltage, battery type, battery voltage, charging current, charging power, working status and so on. Also customer's information like company name, website and logo can be added into Solar Eagle software.
10. RS232 and LAN communication port. IP and Gate address could be user defined to satisfy global area. And communication protocol can be provided to help customer manage all information.
11. The upper computer software is displayed in 11 languages, it could show work status and set parameters of the discharge system.
12. With intelligent design, the device can be upgraded online lifelong.
13. Adopting the well-known brand components, the devices can suffer the temperature not less than 105°C. The service life is designed to use for 10 years in theory.
14. Compliance with the 2002/95/EC environment protecting demand, doesn't include the Cadmium, hydride and fluoride etc material.
15. Equipment integrity: controller + CD-ROM (microcomputer software) + communication wire + temperature sensing wire + Anderson terminals;
16. CE, ROHS certifications approved.

Parameter of mppt charger controller

| Model:I-P-SMART2-40A/50A/60A -series | | 40A | 50A | 60A |
|--|---|---|-------|-------|
| Charge Mode | Maximum Power Point Tracking | | | |
| Method | 3 stages: fast charge(MPPT),constant voltage, floating charge | | | |
| System Type | DC12V/24V/48V | Automatic recognition | | |
| System Voltage | 12V system | DC9V~DC15V | | |
| | 24V system | DC18V~DC30V | | |
| | 48Vsystem | DC36V~DC60V | | |
| Soft Start Time | 12V/24V/48Vsyste m | ≤10S | | |
| Dynamic Response Recovery Time | 12V/24V/48Vsyste m | 500us | | |
| Conversion Efficiency | 12V/24V/48Vsyste m | ≥96.5%,≤99% | | |
| PV Modules Utilization Rate | 12V/24V/48Vsyste m | ≥99% | | |
| Input Characteristics | | | | |
| MPPT Working Voltage and Range | 12V system | DC18V~DC150V | | |
| | 24V system | DC34~DC150V | | |
| | 48V system | DC65~DC150V | | |
| Low Voltage Input Protection Point | 12V system | DC16V | | |
| | 24V system | DC30V | | |
| | 48V system | DC60V | | |
| Low Voltage Input Recovery Point | 12V system | DC22V | | |
| | 24V system | DC34V | | |
| | 48V system | DC65V | | |
| Max DC Voltage | 12V/24V/48V system | DC160V | | |
| Input Overvoltage Protection Point | 12V/24V/48V system | DC150 | | |
| Input Overvoltage Recovery Point | 12V/24V/48V system | DC145V | | |
| Max. PV Power | 12V system | 570W | 700W | 900W |
| | 24V system | 1130W | 1400W | 1700W |
| | 48V system | 2270W | 2800W | 3400W |
| Output Characteristics | | | | |
| Selectable Battery Types (Default type is GEL battery) | 12V/24V/48V system | Sealed lead acid, vented, Gel, NiCd battery (Other types of the batteries also can be defined) | | |
| Constant Voltage | 12V/24V/48V system | Please check the charge voltage according to the battery type form. | | |
| Floating Charge Voltage | 12V/24V/48V system | | | |
| Over Charge Protection Voltage | 12V system | 14.6V | | |
| | 24V system | 29.2V | | |
| | 48V system | 58.4V | | |
| Rated Output Current | 12V/24V/48V system | 40A | 50A | 60A |
| Current-limiting Protection | 12V/24V/48V system | 44A | 55A | 66A |
| Rate charge current | 12V/24V/48V System | 40A | 50A | 60A |
| Temperature Factor | 12V/24V/48V system | ±0.02%/°C | | |

| | | |
|-------------------------------------|--------------------|--|
| Temperature Compensation | 12V/24V/48V system | 14.2V-(The highest temperature-25℃)*0.3 |
| Output Ripples(peak) | 12V/24V/48V system | 200mV |
| Output Voltage Stability Precision | 12V/24V/48V system | ≤±1.5% |
| Charge voltage Peak-Peak Ripple | 12V/24V/48V System | 200mV |
| Charger voltage accuracy | 12V/24V/48V System | ≤±1.5% |
| Discharge characteristic | | |
| Setting Control | Controller or LAN | |
| Max discharge current | 12V/24V/48V System | 40A |
| Discharge protection | 12V/24V/48V System | fuse 30A*2 |
| Double-time control | 12V/24V/48V System | On in morning ,off in morning / On in night ,off in night |
| ON / OFF mode | 12V/24V/48V System | ON / OFF |
| PV voltage control | 12V/24V/48V System | PV voltage on□PV voltage off |
| PV voltage / time delay control | 12V/24V/48V System | PV voltage on□time delay off |
| Discharge voltage protection | 12V/24V/48V System | Output off when it under setting voltage; Factory set is 10.5 .(Note : set based on 1 battery) |
| Communication Features | | |
| RS232 Communication | 12V/24V/48V System | Chose COM communication |
| LAN Communication | 12V/24V/48V System | Set IP and Gate address for controller and solar eagle ;Then chose TCP communication |
| Protection | | |
| Input Low Voltage Protection | | Check the input characteristics |
| Input Overvoltage Protection | | Check the input characteristics |
| Input Polarity Reversal Protection | | yes |
| Output Overvoltage Protection | | Check the output characteristics |
| Output Polarity Reversal Protection | | yes |
| Short-circuit Protection | | Recover after eliminating the Short-circuit fault, no problem for long term Short-circuit |
| Temperature Protection | | 95℃ |
| Temperature protection | | Above 85℃,decrease the output power, decrease 3A per degree. |
| Other Parameters | | |
| Noise | | ≤40dB |
| Thermal methods | | Forced air cooling, fan speed rate regulated by temperature, when inner temperature is too low, fan ran slowly or stop; when controller stop working, fan also stop ran. |
| Components | | World brand raw materials. Compliance with EU standards. All rated temperature of electrolytic capacitors not less than 105℃ |
| Smell | | No peculiar smell and toxic substances. |
| Environment Protection | | Meet the 2002/95/EC,no cadmium hydride and fluoride |
| Physical | | |
| Measurement DxWxH (mm) | | 270*185*90 |
| N.G(kg) | | 3 |
| G.N(kg) | | 3.6 |
| Color | | Blue/Green (optional) |
| Safety | | CE, RoHS, PSE,FCC |
| EMC | | EN61000 |
| Type of Mechanical Protection | | IP21 |
| Environment | | |
| Humidity | | 0~90%RH (no condense) |
| Altitude | | 0~3000m |
| Operating Temperature | | -20℃ ~ +40℃ |
| Storage Temperature | | -40℃ ~ +75℃ |
| Atmospheric Pressure | | 70~106kPa |

Note: OEM and ODM service are provided. The 36V/72V/96V model also can be custom made for you.

Product Parts

| NO. | Quantity | Description |
|-----|----------|--|
| 1 | 1 unit | Charge controller |
| 2 | 2 pc | Terminals |
| 3 | 2 pc | Gallow pulley (For install the controller on the wall) |
| 4 | 4 set | Screw (For install the controller on the wall) |
| 5 | 1 pc | 232 turn to RJ45 communication cable |
| 6 | 1 pc | User manual |
| 7 | 1 pc | Temperature sensing wire |
| 8 | 2 pc | Fuse wire |



Blue



Green



Upper Computer Software






Parts




Package

Upper Computer Software and Test Software

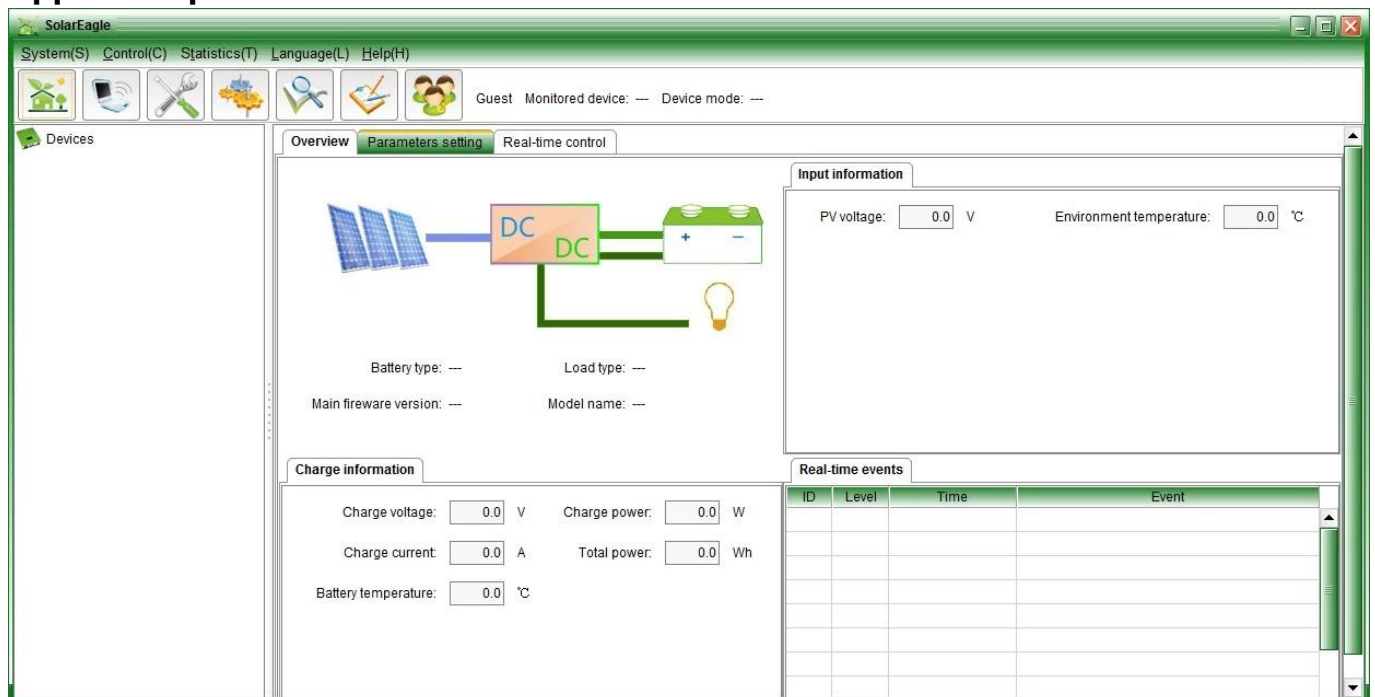

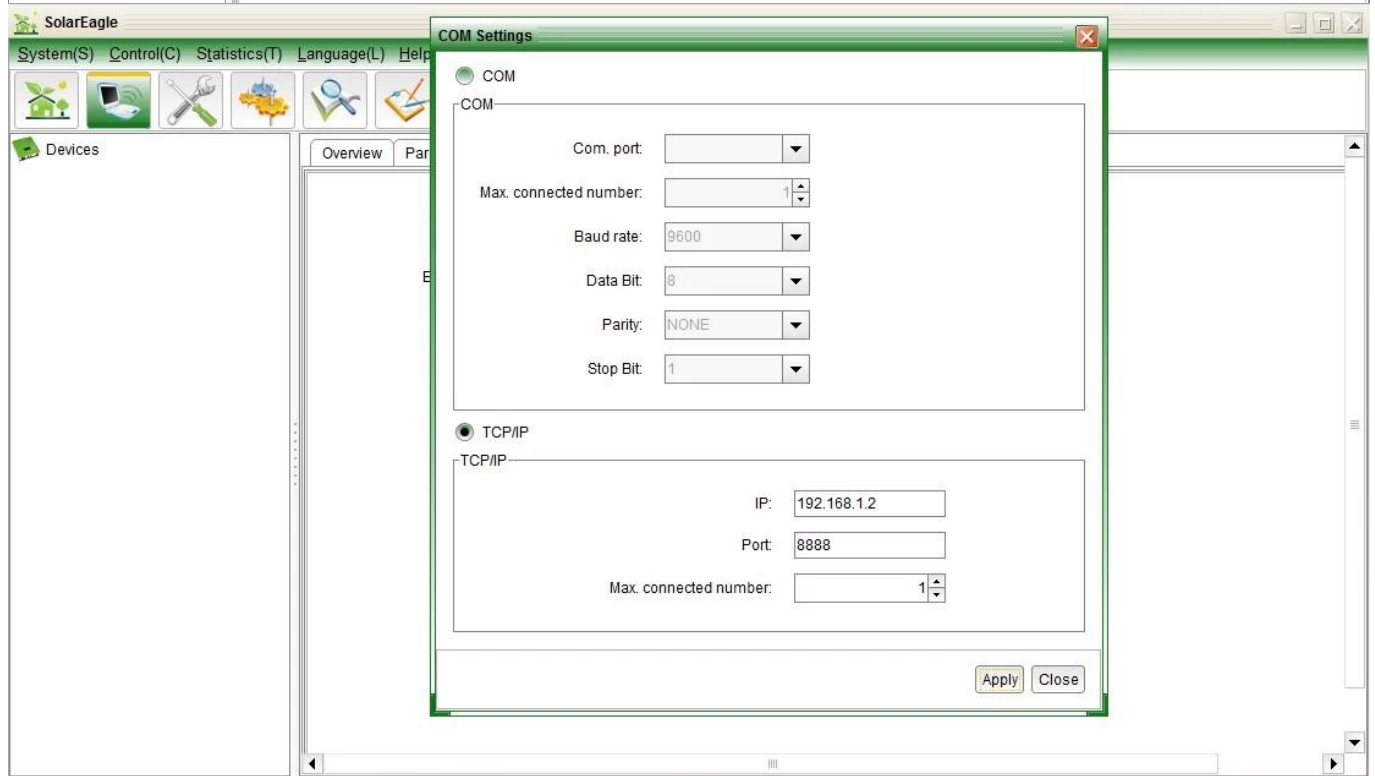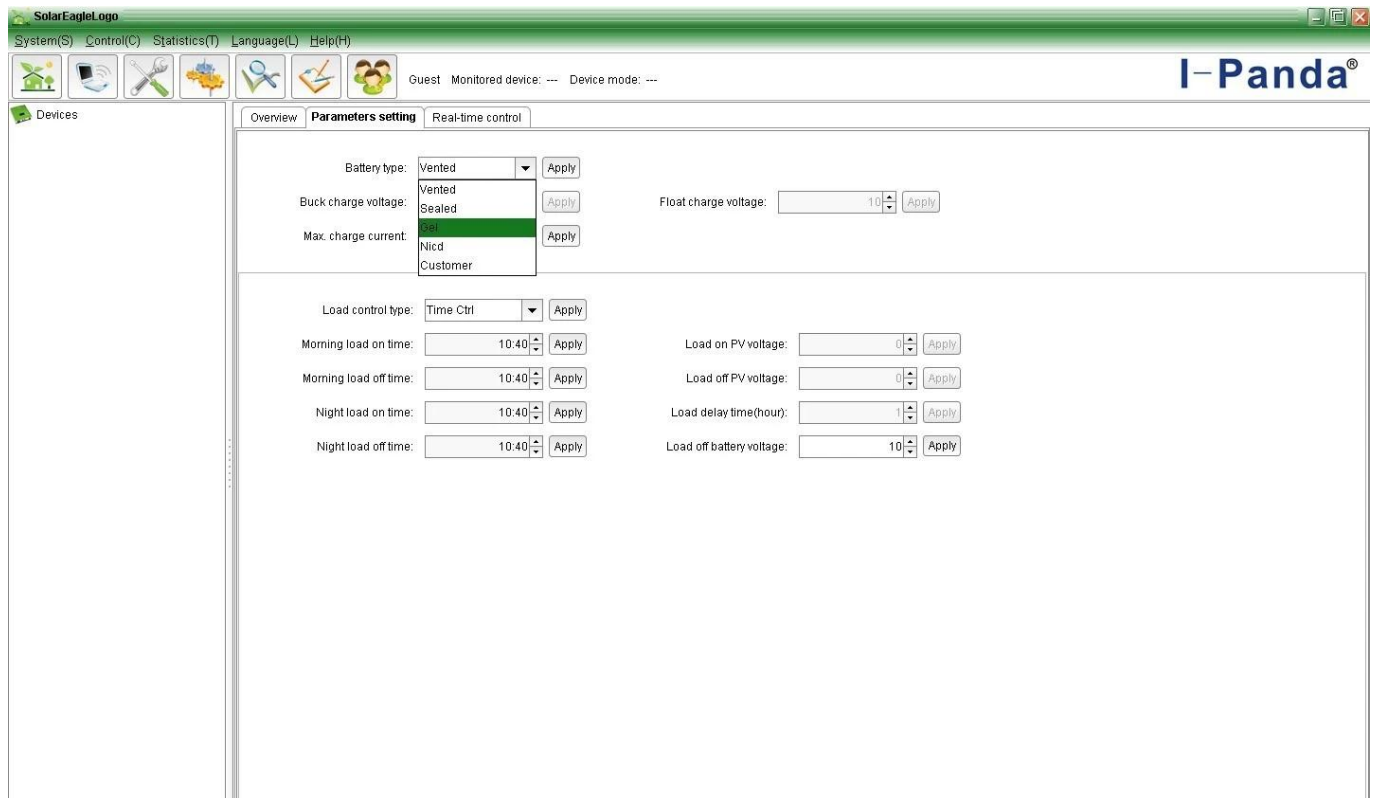

MPPT Connection

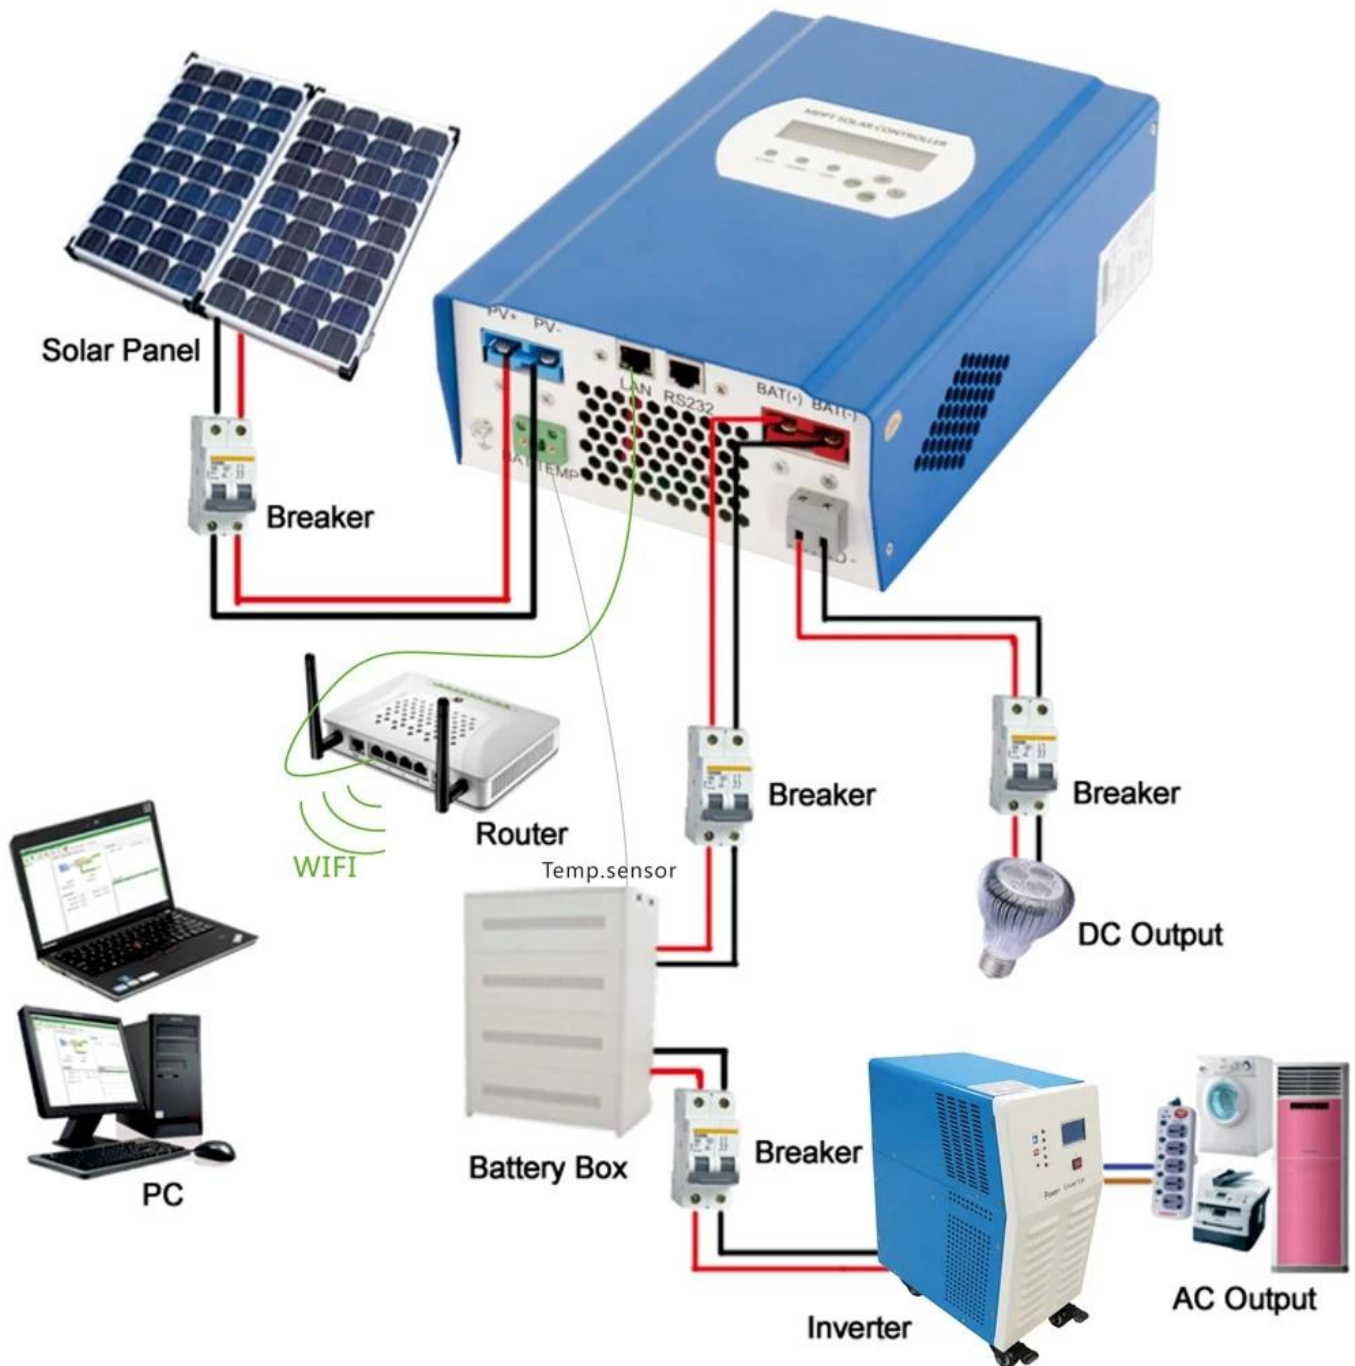

R&D and Quality Control

[R&D](#)

[Quality Control](#)

Service and Contact

1. Warranty

1.1 Two years warranty, lifelong technical assistance.

2. Conditions and Terms

2.1 The warranty starts from the delivery date from our factory.

2.2 During the warranty, any defective product will get repaired or replaced for free.

2.3 The warranty is unavailable for those products which are broken by the violence or the carelessness or repaired or altered without the authorization.

3. Lead Time

3.1 Sample orders: 2-5 working days.

3.2 Mass orders: 25 working days at most.

4. Shipment

4.1 Samples By EMS,DHL,FedEx or other express.

4.2 Mass orders by our forwarding agent(by air or by sea).

4.3 Mass orders by your own forwarding agent.