Introduction

This is a I-panda I-P-eSMART series MPPT (maximum Power Point Tracking) smart <u>solar controller</u>, with charging and discharging function, increasing 30%~60% efficiency than traditional PWM controller. It has automatic recognition function, three Stages charging function, also supports many kinds of battery charging and discharging, RS232 communication etc, It's our company's MPPT solar controller e-SMART series.

Features

1. MPPT charging mode, Max. efficiency up to 99%, saving 30%~60% solar panel than traditional PWM controller.

2. DC12V/24V/48V battery system automatic recognition, users would like to use in different system conveniently.

3. DC12V/24V/48V system, maximum PV input voltage up to DC100V.

4. Charge type: three stages charge fast charge(MPPT), constant voltage,

floating charge, protected our battery, lead to a long use age.

5. Discharge type owns always on pattern and always off pattern, it also has PV voltage solar controlling switch pattern.

6. Clients can auto select any one in the 4 kinds of commonly used batteries, Sealed lead acid, vented, Gel, NiCd and custom other batteries.

7. Digital tube display controller battery voltage and charging current,upper computer display various parameters, such as model, PV input voltage, battery types, battery voltage, charging current, charging power, working condition etc.

8. RS232 communication, and that providing communication protocol, it's convenient for customer's integration management.

9. This controller could be paralleled infinitely.

10. CE, RoHS Certifications approved; cooperating with clients through the other certifications.

11. 2 years warranty; 3~10 years extended technical service.

Products photos





Parameters

| MPPT solar controller | | 15A |
|--|-----------------------|---|
| I-P-e-SMART-12V/24V | /48V-series | 155 |
| Charge mode | MPPT(maximum powe | er point tracking) |
| Charge method | Three stages: constar | nt current(MPPT),constant voltage,floating charge |
| System type | DC12V/24V/48V | Automatic recognition |
| System voltage | 12V system | DC9V~DC15V |
| | 24V system | DC18V~DC30V |
| | 48V system | DC36V~DC60V |
| Soft start time | 12V/24V/48V system | ≤3S |
| Dynamic response recovery and range | 12V/24V/48V system | 500us |
| MPPT efficiency | 12V/24V/48V system | ≥96.5%,≤99% |
| INPUT CHARACTERIST | TICS | |
| MPPT working voltage and Range | 12V system | DC14V~DC100V |
| | 24V system | DC30~DC100V |
| | 48V system | DC60~DC100V |
| Low voltage input Protection point | 12V system | DC14V |
| | 24V system | DC30V |
| | 48V system | DC60V |
| Low voltage input Recovery point | 12V system | DC18V |
| | 24V system | DC34V |
| | 48V system | DC65V |

| Input over voltage | 12V/24V/48V system | DC110V |
|--|----------------------------------|---|
| | _ | |
| recovery point | 12V/24V/48V system | |
| | 12V system (W) 24V system (W) | 216 426 |
| | 48V system (W) | 852 |
| CHARGE CHRECTREST | | |
| Selectable Battery | | |
| Types | 12V/24V/48V system | Sealed lead acid, vented, Gel, NiCd battery (Other types of the batteries also can be defined)[] |
| | 12V/24V/48V system | Please check the charge voltage according to the battery type form. |
| Floating Charge Voltage | 12V/24V/48V system | Please check the charge voltage according to the battery type form. |
| | 12V/24V/48V system | |
| Current-limiting Protection | 12V/24V/48V system | 20A |
| Temperature Factor | 12V/24V/48V system | ±0.02%/°C |
| Temperature Compensation | 12V/24V/48V system | 14.2V-(The highest temperature-25°C)*0.3 |
| Output Ripples(peak) | 12V/24V/48V system | 200mV |
| Output Voltage Stability Precision | 12V/24V/48V system | ≤±1.5% |
| Output Discharge Cha | racteristics | |
| Output voltage | | Base on battery voltage |
| Low voltage output Protection point | | Default 10.5V; recovery 11V; custom available ; |
| The output control Output control set mode | | 30A Always on, always off, PV voltage control switch Controller button or upper computer |
| Display LED digital tube display LED light display PC[]communication port[] Protection | | Battery voltage, charge current Charging indicator light, LOAD indicator light RS232 |
| Input Low Voltage Pro | tection | Check the input characteristics |
| Input Overvoltage Protection | | Check the input characteristics yes |
| Charge over voltage power Protection Low Voltage output Protection | | yes |
| | | VAC |
| Temperature Protection | | yes yes |
| Other Parameters | | |
| Noise | | ≤40dB |
| Thermal heat-dissipating method Components | | Itself cooling fan cooling Imported material, with EU standards. |
| Certification | | CE\FCC\ROHS |
| Physical | | |
| Measurement D x W x | | 205*168*60 |
| package size D x W x H(mm) N.G(KG) | | 265*196*110 1.8kg |
| G.N(KG) | | 2kg |
| Type of Mechanical Protection | | IP25 |
| Environment Humidity | | 0~90%RH (no condense) |
| Altitude | | 0~3000m |
| Operating Temperatu | re | -20°C ~ +50°C |
| Storage Temperature | | -40°C ~ +75°C |



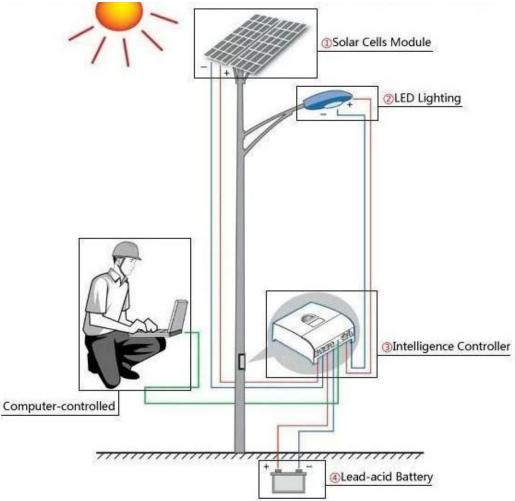

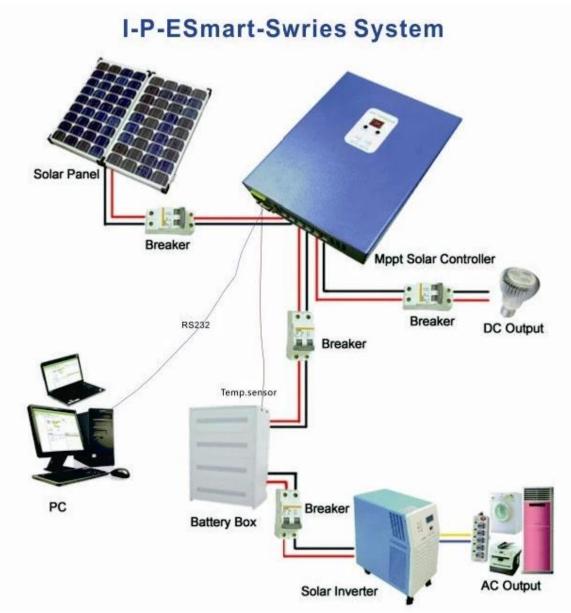

Upper software

| SolarEagle | | | | | | |
|------------------------------------|---|----------|--|--|--|--|
| System(S) Control(C) Statistics(T) | Language(L) Help(H) | | | | | |
| <u>X</u> 🔊 X 🍬 | Guest Monitored device: Device mode: | | | | | |
| Devices | Overview Parameters setting Real-time control | | | | | |
| | Input information | | | | | |
| | Battery type: Main fireware version: | 0.0 °C | | | | |
| | Charge information Real-time events | | | | | |
| | Charge voltage: 0.0 V Charge power: 0.0 W ID Level Time Event | _ | | | | |
| | Charge current 0.0 A Total power. 0.0 Wh | | | | | |
| | Battery temperature: 0.0 °C | | | | | |
| | | | | | | |

Company photos





Shanghai International Photovoltaic Power Generation Conference & Exhibition

