

Connection Diagram



Functions:

- 1)MPPT (Maximum Power Point Tracking) charge function
- 2)Auto Recognition function
- 3)[3-stage charge function](#)
- 4)Professional PC communication function

Feature:

1.MPPT charge mode,conversion efficiency upto 99%,can save 30%~60%of the power than traditional controller.

2.With high efficient MPPT operation scheme and adopting TI28035chip,make the Solar panels utilization rate upto 99%.

Intelligent design,the device can be upgraded online,customer enjoy the lifelong upgrade service.

4.Compliance with the 2002/95/EC environment protectingdemand,doesn't include the Cadmium, hydride and fluoride

5.Adopting the well-known brand components,the devices can suffer the temperature not less than 105°C.The service life is designed to extend to 10years in theory.

6.Charge mode: three stages (fastcharge,constant charge,float charge)

7.12V/24V/48V system autorecognize for easy control.

8.Nominal maximum solar input isDC 150V

9.Connected Battery Type choosing:Sealed lead acid, vented, Gel, NiCd battery. Other types of the batteries canalso be defined.

10. LCD and LEDs show all kinds ofparameter like products model, PV input voltage,battery voltage,chargecurrent,charge power,work condition,and also can add customers'company name andwebsite.

11. Communication Port.RS232communication can provide communication protocol, This make the unified andintegrated management more convenient to customers.

12. With providing a Microsoft byconnecting with PC that can show the working state and all parameters in 7languages.

13. Extensible LAN remote control.

14.Equipment integrity:controller+CD-ROM(microcomputer software) + communication wire+Andersonterminals;

15.CE,ROHS,FCC,PSE certificationsapproved.The device also can support to pass the other certifications.

16. 2 years warranty. And 3~10years extended warranty service also can be provided.

Parameters


Model:I-P-MSC-DC12V/24V/48V-series		50A
Charge Mode	Maximum Power Point Tracking	
Method	3 stages: fast charge(MPPT),constant voltage,floating charge	
System Type	DC12V/24V/48V	Automatic recognition
System Voltage	12V system	DC9V~DC15V
	24V system	DC18V~DC30V
	48Vsystem	DC36V~DC60V
Soft Start Time	12V/24V/48Vsystem	≤10S
Dynamic Response	12V/24V/48Vsystem	500us
Recovery Time	12V/24V/48Vsystem	500us
Conversion Efficiency	12V/24V/48Vsystem	≥96.5%,≤99%
PV Modules Utilization Rate	12V/24V/48Vsystem	≥99%
Input Characteristics		
MPPT Working Voltage and Range	12V system	DC18V~DC150V
	24V system	DC34~DC150V
	48V system	DC65~DC150V
Low Voltage Input Protection Point	12V system	DC16V
	24V system	DC30V
	48V system	DC60V
Low Voltage Input Recovery Point	12V system	DC22V
	24V system	DC34V
	48V system	DC65V
Max DC Voltage	12V/24V/48V system	DC160V
Input Overvoltage Protection Point	12V/24V/48V system	DC150V
Input Overvoltage Recovery Point	12V/24V/48V system	DC145V
Max. PV Power	12V system	700W
	24V system	1400W
	48V system	2800W
Output Characteristics		
Selectable Battery Types (Default type is GEL battery)	12V/24V/48Vsystem	Sealed lead acid, vented, Gel, NiCd battery (Other types of the batteries also can be defined)
Constant Voltage	12V/24V/48V system	Please check the charge voltage according to the battery type form.
Floating Charge Voltage	12V/24V/48V system	
Over Charge Protection Voltage	12V system	14.6V
	24V system	29.2V
	48V system	58.4V
Rated Output Current	12V/24V/48V system	50A
Current-limiting Protection	12V/24V/48V system	55A
Temperature Factor	12V/24V/48V system	±0.02%/°C
Temperature Compensation	12V/24V/48V system	14.2V-(The highest temperature-25°C)*0.3
Output Ripples(peak)	12V/24V/48V system	200mV

Output Voltage Stability Precision	12V/24V/48V system	≤±1.5%
Display		
LCD display		Input,output parameter and output power etc (check the LCD display instruction)
LED display		3 LEDs indicates:Fault indicate light,charge indicate light,power source indicate light(check the LED instruction)
Software Control through PC(communication port)		RS232 (matching) or LAN(optional)
Protection		
Input Low Voltage Protection		Check the input characteristics
Input Overvoltage Protection		Check the input characteristics
Input Polarity Reversal Protection		yes
Output Overvoltage Protection		Check the output characteristics
Output Polarity Reversal Protection		yes
Short-circuit Protection		Recover after eliminating the Short-circuit fault,no problem for long term Short-circuit
Temperature Protection		95°C
Temperature protection		Above 85°C,decrease the output power,decrease 3A per degree.
Other Parameters		
Noise		≤40dB
Thermal methods		Forced air cooling,fan speed rate regulated by temperature,when inner temperature is too low,fan ran slowly or stop;when controller stop working,fan also stop ran.
Components		World brand raw materials. Compliance with EU standards.All rated temperature of electrolytic capacitors not less than 105°C
Smell		No peculiar smell and and toxic substances.
Environment Protection		Meet the 2002/95/EC,no cadmium hydride and fluoride
Physical		
Measurement D x W x H(mm)		270*185*90
N.G(kg)		3.6
G.N(kg)		4.2
Color		Blue/Green (optional)
Safety		CE, RoHS
EMC		EN61000
Type of Mechanical Protection		IP21
Environment		
Humidity		0~90%RH (no condense)
Altitude		0~3000m
Operating Temperature		-20°C ~ +40°C
Storage Temperature		-40°C ~ +75°C
Atmospheric Pressure		70~106kPa

The specification is only for reference. Subject to change without prior notice.

We provide OEM and ODM service.The 36V/72V/96V model also can be custom made for you.

Communication way

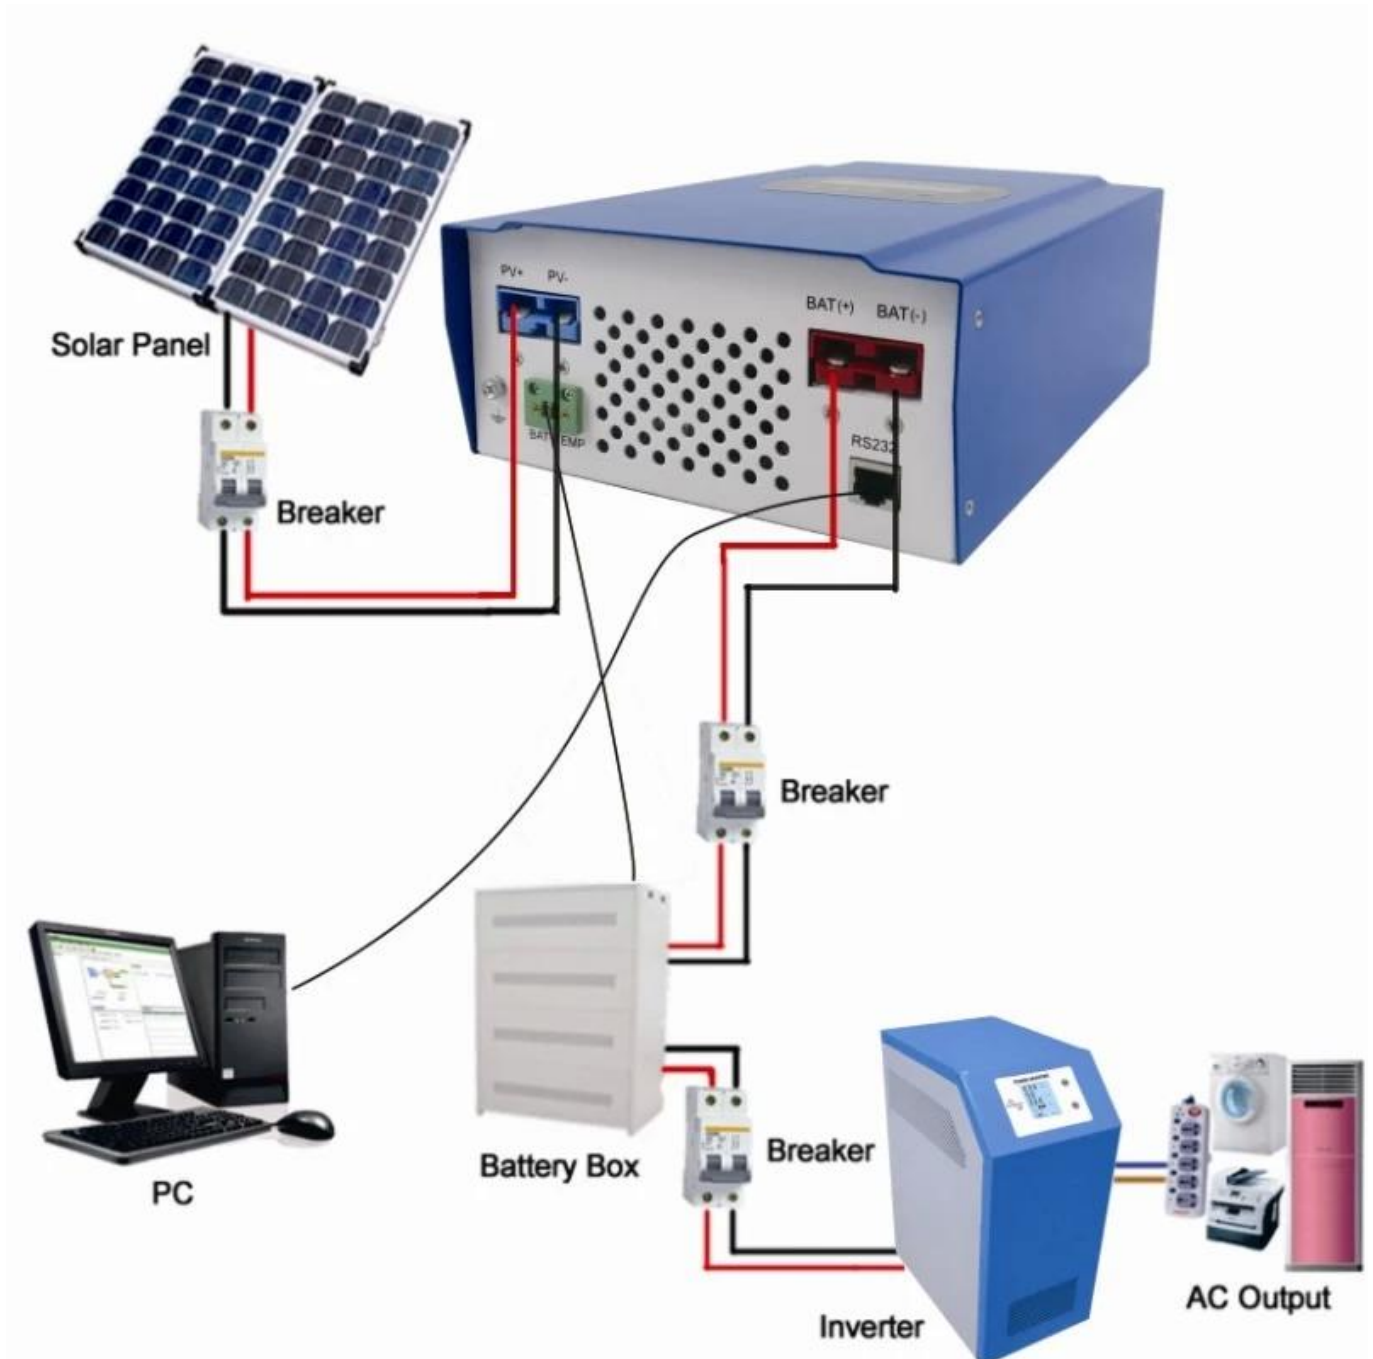

Applications

1. Industrial,commercial,household off-grid solar power system
2. moveable off-grid solar power system
3. Communication base stations
4. Energy knowledge popularization

Welcome to order I-Panda [MPPT Solar Charge Controller Smart1 48V 40A~60A](#)