

# MPPT 48V 100A



## Features

- MPPT efficiency  $\geq 99.5\%$
- MPPT tracking range  $\geq 98\%$
- MPPT tracking range  $\geq 99.5\%$
- Battery protection
- Support gel battery
- Support FCUN
- Support PV
- Support PV+
- RS485
- WiFi
- CE, ROHS, FCC

## Specifications

Model		48BL-100A	
Parameter	MPPT Efficiency	$\geq 99.5\%$	
	MPPT Tracking Range	$\geq 98\%$	
	MPPT Tracking Accuracy	$\pm 0.5\%$	
	MPPT Tracking Time	$\leq 1.2W$	
	MPPT Tracking Range	$\geq 99.5\%$	
Max. PV Voltage (VOC)	Max. PV Voltage (VOC)	DC150V	
	Battery Voltage	12V + 3V	
	Battery Voltage	24V + 2V	
	Battery Voltage	DC150V	
	Max. PV Power (W)	12V	1300W
		24V	2600W
		36V	3900W
48V		5200W	



MPPT Solar MonitorV1.0

# IPANDEE

MPPT Model: Explorer-M2460    Firmware: V2.6    Serial: 9246111120220419    Message: Click [START EDIT] to modify parameters!

Com Port: COM1

BaudRate: 9600

Address: 1

Opened

**Running State**

Standby

**Real-time Data**

PV Volt: 0.1V  
 BAT Volt: 14.2V  
 Load Volt: 14.1V  
 CHG Curr: 0.0A  
 Load Curr: 0.4A  
 CHG Power: 0W  
 Load Power: 5W  
 Inner Temp: 27.0°C  
 BAT Temp: 25.0°C  
 Alarm Tip: PV Low

**Electricity Statistics**

Day CHG: 0.0kWh  
 Month CHG: 0.0kWh  
 Total CHG: 0.0kWh  
 Day Used: 0.5kWh  
 Month Used: 0.5kWh  
 Total Used: 0.5kWh

**Bat Parameters Of Controller**

Bat Category: FLD    System Volt: (Auto)12V  
 C.V. Charge: 14.6V    Float Charge: 13.8V  
 Equalizing V: 14.8V    Equalizing T: 30 min  
 Max Chg Curr: 60.0A    Max Load Curr: 30.0A  
 Battery Over: 15.0V    Over Recover: 14.8V  
 Battery Low: 10.5V    Low Recover: 11.0V

**Bat Parameters Set**

Select Battery

BatType: FLD    Sys. Volt: Auto

Max CHG -I: 60.0 A    Max Load-I: 30.0 A

**Lead Acid Battery(9~15V)**

C.V. Charge: 14.6 V  
 Equalizing V: 14.8 V  
 Float Charge: 13.8 V  
 Equalizing T: 30 min  
 Battery Over: 15.0 V  
 Over Recover: 14.8 V  
 Battery Low: 10.5 V  
 Low Recover: 11.0 V

**Lithium Battery**

Charge Volt: 14.4 V  
 Nominal Volt: 12.8 V  
 Battery Over: 15.0 V  
 Over Recover: 14.4 V  
 Battery Low: 7.6 V  
 Low Recover: 5.0 V

**Load Output Parameters Of Controller**

Load Control Mode: On Mode

Note: If Vbat exceeds the protection, will turn off!

**Load Output Set**

Light Mode

On Load->PV Low: 30.0 V    Off Delay: 10 min  
 OffLoad->PV OK: 30.0 V    Off Delay: 10 min

**Dual Timer Mode**

Timer1->On Time: 10 : 30    Off Time: 10 : 30  
 Timer2->On Time: 10 : 30    Off Time: 10 : 30

**Light-Time Mode**


Dark->On Load->PvLow: 30.0 V    On Hour: 10 H  
 Dawn->OffLoad->Pv Ok: 30.0 V    On Hour: 0 H

Load Mode Selection:


On Mode

Copyright(C)IPANDEE [2022/1]    2022- 4-19 15:37:33    Bytes received: 378468    Bytes sent: 99320    Language: English   



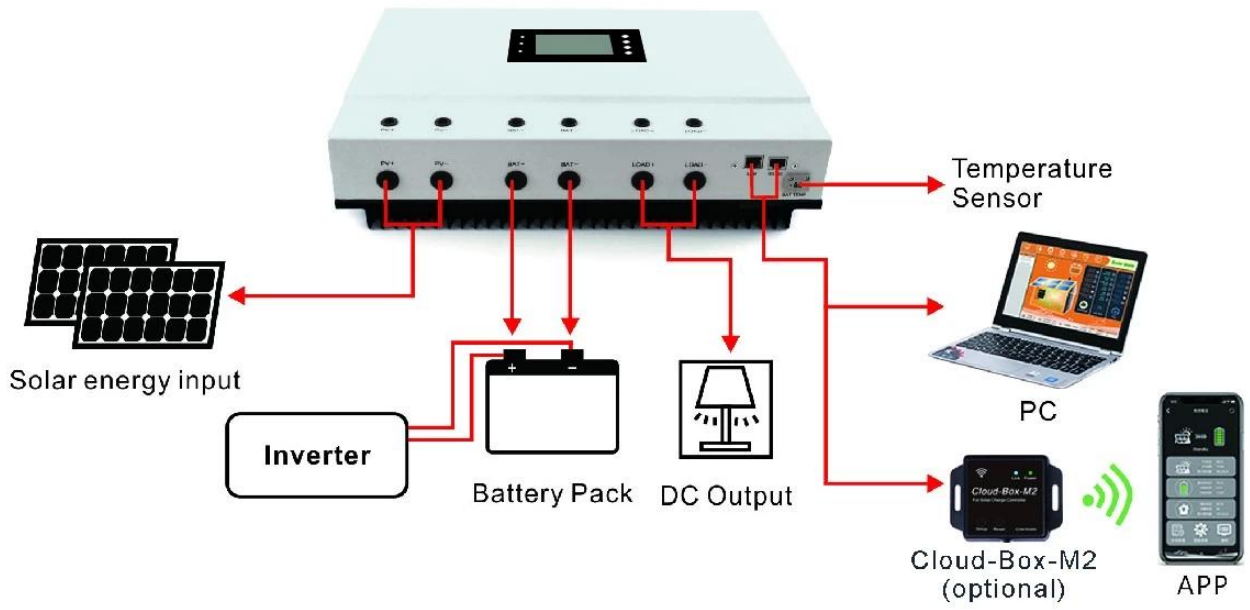

□□□□□

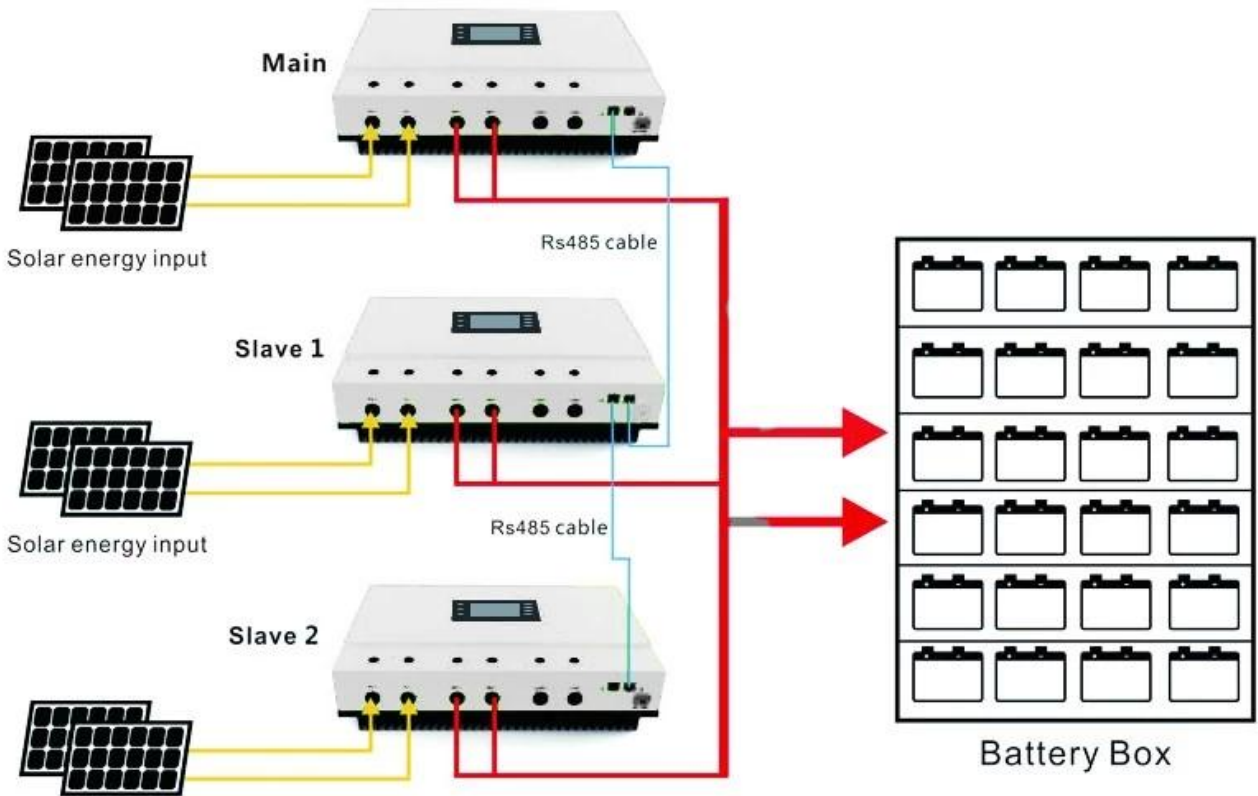

□□MPPT□□□□□□□□10□2016□SNEC Fair 10top□□

□  
□  
□

□□□□□□□□□□□□□□

