Introduction:

This is a solar charge controller 40A \sim 60A that have automatic max. power point tracking function with high efficiency that almost 30% \sim 60% higher than traditional charge controller. It also features the functions of system voltage auto recognition, wide rang of PV input ,charge for all kinds of battery,automatic discharge control,RS 232 / LAN communication function and so on. It is very high-end product for solar market.

Feature:

- 1.MPPT charge mode, conversion efficiency upto 99%
- 2.12V/24V/48V system auto recognize;
- 3. Wide range of PV input with max. is DC150V.
- 4. Unlimited parallel connection
- 5. Journal function, Save function set, Date, time, Generating capacity and so on.
- 6.Charge mode: three stages (fast charge ,constant charge ,floating charge) .It prolongs service life of the batteries .
- 7.Discharge mode: ON/OFF mode, double time control mode,PV voltage control mode ,PV voltage+time delay mode and so on .
- 8.Recommended battery types: sealed lead acid, vented, gel, NiCd battery. Other types of the batteries can also be defined.
- 9.Most information could be provide by LCD and LED like: model no.,PV input voltage,battery type,battery voltage,charging current,charging power,working status and so on. Also customer's information like company name,website and logo can be added into Solar Eagle software.
- 10.RS232 and LAN communication port. IP and Gate address could be user define it satisfy global area. And communication protocol can be provided to help customer manage all information .
- 11. The upper computer software is displayed in 11 languages, it could show work status and set parameters of the discharge system.
- 12. With intelligent design, the device can be upgraded online lifelong.
- 13.Adopting the well-known brand components, the devices can suffer the temperature not less than 105°C. The service life is designed to use for 10 years in theory.
- 14.Compliance with the 2002/95/EC environment protecting demand, doesn't include the Cadmium, hydride and fluoride etc material
- 15.Equipment integrity: controller + CD-ROM(microcomputer software) + communication wire + temperature sensing wire+Anderson terminals;
- 16.CE,ROHS certifications approved.
- 17.2 years warranty. And 3~10 years extended warranty service also can be provided.

Parameter:

Model:I-P-SMART2-40A/50A/60A -series		40A	50A	la l	60A		
	Manianum Danian D		DUA		bUA		
Charge Mode	Maximum Power P		the state of the state of				
Method		ge(MPPT),constant voltage, floating charge					
System Type		Automatic recogni	tion				
	12V system	DC9V~DC15V					
System Voltage	24V system	DC18V~DC30V					
	48Vsystem	DC36V~DC60V					
Soft Start Time	12V/24V/48Vsyste	≤10S					
Soit Start Time	m	≥102					
Dynamic Response	12V/24V/48Vsyste						
Recovery Time	m	500us					
inecovery fillie							
Conversion Efficiency	12V/24V/48Vsyste	≥96.5%,≤99%					
,	m	,					
PV Modules Utilization Rate	12V/24V/48Vsyste	≥99%					
	m						
Input Characteri							
		DC18V~DC150V					
MPPT Working Voltage and Range	24V system	DC34~DC150V					
	48V system	DC65~DC150V					
	12V system	DC16V					
Low Voltage Input Protection Point	24V system	DC30V					
	48V system	DC60V					
	12V system	DC22V					
Low Voltage Input Recovery Point	24V system	DC34V					
	48V system						
	12V/24V/48V	DC65V					
Max DC Voltage	, , ,	DC160V	DC160V				
<u> </u>	system						
Input Overvoltage Protection Point	12V/24V/48V	DC150					
,	system						
Input Overvoltage Recovery Point	12V/24V/48V	DC145V					
p. 111.11111g3 Necovery Come	system						
		570W	700W		900W		
Max. PV Power	24V system	1130W	1400W		1700W		
	48V system	2270W	2800W		3400W		
Output Characteristics							
Selectable Battery Types (Default type is GEL	12V/24V/48V	Sealed lead acid. v	ented, Gel, NiCd batter	7			
battery)	system		batteries also can be o				
baccery,	1 *	(other types of the	batteries also can be t	acilited)			
Constant Voltage	12V/24V/48V						
John Starre Torrage	system	Please check the charge voltage according to the battery type form.					
Floating Charge Voltage	12V/24V/48V	i icase cricek tric c	narge voitage according	g to the buttery type	2.101111.		
l loating charge voltage	system						
	12V system	14.6V					
Over Charge Protection Voltage	24V system	29.2V					
	48V system	58.4V					
	12V/24V/48V						
Rated Output Current	system	40A	50A	•	60A		
	12V/24V/48V						
Current-limiting Protection	system	44A	55A	(66A		
	12V/24V/48V						
Rate charge current		40A	50A	6	60A		
	System						
Temperature Factor	12V/24V/48V	±0.02%/℃					
- P	system						
Temperature Compensation	12V/24V/48V	14 2V-(The highest	temperature-25°C)*0.3	3			
Temperature compensation	system	14.2 V (The highes	temperature 25 c/ o				
Output Ripples(peak)	12V/24V/48V	200mV					
Output Rippies(peak)	system	2001110					
Output Valtage Stability Draginian	12V/24V/48V	- L1 E0/					
Output Voltage Stability Precision	system	≤±1.5%					
Channel and Book Book Bird	12V/24V/48V	2001/					
Charge voltage Peak-Peak Ripple	System	200mV					
Ch	12V/24V/48V	- 1.1 50/					
Charger voltage accuracy	System	≤±1.5%					
Discharge characteristic							
Setting Control	Controlle	r or LAN					
	12V/24V/48V						
Max discharge current	System	40A					
	12V/24V/48V						
Discharge protection	System	fuse 30A*2					
	12V/24V/48V						
Double-time control	System	On in morning ,off	in morning / On in nigh	t ,off in night			
	12V/24V/48V						
ON / OFF mode		ON / OFF					
	System						
PV voltage control	12V/24V/48V	PV voltage on PV v	voltage off				
	System	J - G -					
PV voltage / time delay control	12V/24V/48V	PV voltage on∏time	e delay off				
	System		,				
Discharge voltage protection	12V/24V/48V	Output off when it	under setting voltage: I	Factory set is 10 5 (Note : set based on 1 battery)		
5 5 1	System	- aspas on Wilcinit	ac. secting voicage, i		June 1 Ju		
Communication Features							
RS232 Communication	12V/24V/48V	Chose COM comm	unication				
NOZOZ COMMUNICACION	System	CHOSE COM COMM	umcation				
I AN Communication	12V/24V/48V	Cat ID and Color	denge for	leolor ol- T	hasa TCD sarranniani		
LAN Communication	System	Set IP and Gate ad	aress for controller and	ı solar eagle ;Then cl	hose TCP communication		
Protection	- /						
Input Low Voltage Protection	Check the input ch	neck the input characteristics					
Input Overvoltage Protection	Check the input characteristics						
Input Polarity Reversal Protection	ves	accer 130103					
Output Overvoltage Protection	,	haractoristics					
CULDUL OVELVULAUE FIULECLIUM		Check the output of	וומו מכנכו ואנוכא				

Output Polarity Reversal Protection	yes		
Short-circuit Protection	Recover after eliminating the Short-circuit fault, no problem for long term Short-circuit		
Temperature Protection	95℃		
Temperature protection	Above 85°C, decrease the output power, decrease 3A per degree.		
Other Parameters			
Noise	≤40dB		
Thermal methods	Forced air cooling, fan speed rate regulated by temperature, when inner temperature is too low, fan ran slowly or stop; when controller stop working, fan also stop ran.		
Components	World brand raw materials. Compliance with EU standards. All rated temperature of electrolytic capacitors not less than 105℃		
Smell	No peculiar smell and toxic substances.		
Environment Protection	Meet the 2002/95/EC,no cadmium hydride and fluoride		
Physical			
Measurement DxWxH (mm)	270*185*90		
N.G(kg)	3		
G.N(kg)	3.6		
Color	Blue/Green (optional)		
Safety	CE, RoHS, PSE,FCC		
EMC	EN61000		
Type of Mechanical Protection	IP21		
Environment			
Humidity	~90%RH (no condense)		
Altitude	3000m		
Operating Temperature	~ +40°C		
Storage Temperature	~ +75℃		
Atmospheric Pressure	06kPa		

Note:We provide OEM and ODM service. The 36V/72V/96V model also can be custom made for you.

Product Parts:

NO.	Quantity	Description
1	1 unit	Charge controller
2	2 pc	Terminals
3	2 pc	Gallow pulley
		(For install the controller on the wall)
4	4 set	Screw
		(For install the controller on the wall)
5	1 pc	232 turn to RJ45 communication cable
6	1 pc	User manual
7	1 pc	Temperature sensing wire
8	2 pc	Fuse wire



The Main Information of MPPT



Note: 1) All above information is a sample which is the working state of MPPT in sometime . In different working stage the parameters will change like work mode , charge current ,charge mode ,charge power and so on ; In the fault mode it will show fault mode ;

2) If all above dates show **X X** means this could change ;the details please check the manul

Upper Computer Software and Test Software






The interface of upper computer software working state

The interface of upper computer software parameter setting state



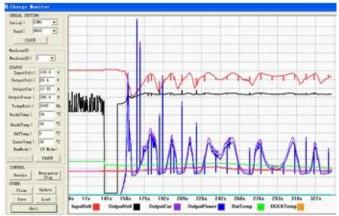


Upper computer software on/off interface and generating capacity record clean interface

The interface of test software working state

Note: 1) Attachment have upper computer software, suitable for all computer system

- 2) Trafficker will provide neutral upper computer software and CD , or software with customer's logo .
 - 3) WIN7, WIN8 system user, please log in as administrator: More details please check the manul.

MPPT Connection

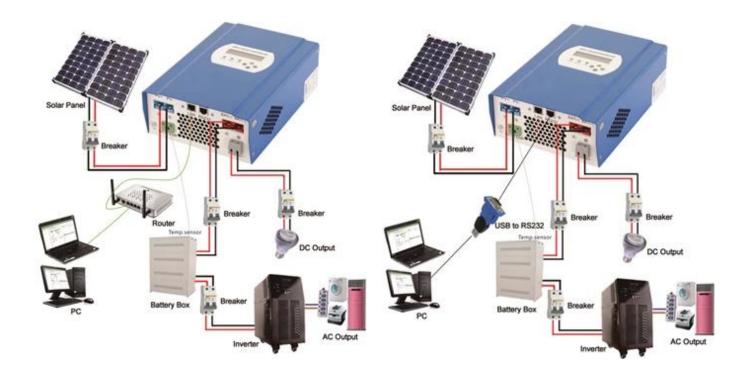

Note: 1) Above is off-grid solar system connection picture;

2) There are many way s for communication , details please check manul;

 $\textbf{Other Parameters:} \ \ \text{Details please check design brief } \ \ \underline{\ } \ \text{technical documents } \ \underline{\ } \ \text{product manual }.$