Introduction:

This is a solar charge controller 40A \sim 60A that have automatic max. power point tracking function with high efficiency that almost 30% \sim 60% higher than traditional charge controller. It also features the functions of system voltage auto recognition, wide rang of PV input ,charge for all kinds of battery,automatic discharge control,RS 232 / LAN communication function and so on. It is very high-end product for solar market.

Feature:

- 1.MPPT charge mode, conversion efficiency upto 99%
- 2.12V/24V/48V system auto recognize;
- 3. Wide range of PV input with max. is DC150V.
- 4. Unlimited parallel connection
- 5. Journal function, Save function set, Date, time, Generating capacity and so on.
- 6.Charge mode: three stages (fast charge ,constant charge ,floating charge) .It prolongs service life of the batteries .
- 7.Discharge mode: ON/OFF mode, double time control mode,PV voltage control mode ,PV voltage+time delay mode and so on .
- 8.Recommended battery types: sealed lead acid, vented, gel, NiCd battery. Other types of the batteries can also be defined.
- 9.Most information could be provide by LCD and LED like: model no.,PV input voltage,battery type,battery voltage,charging current,charging power,working status and so on. Also customer's information like company name,website and logo can be added into Solar Eagle software.
- 10.RS232 and LAN communication port. IP and Gate address could be user define it satisfy global area. And communication protocol can be provided to help customer manage all information .
- 11. The upper computer software is displayed in 11 languages, it could show work status and set parameters of the discharge system.
- 12. With intelligent design, the device can be upgraded online lifelong.
- 13.Adopting the well-known brand components, the devices can suffer the temperature not less than 105°C. The service life is designed to use for 10 years in theory.
- 14.Compliance with the 2002/95/EC environment protecting demand, doesn't include the Cadmium, hydride and fluoride etc material
- 15.Equipment integrity: controller + CD-ROM(microcomputer software) + communication wire + temperature sensing wire+Anderson terminals;
- 16.CE,ROHS certifications approved.
- 17.2 years warranty. And 3~10 years extended warranty service also can be provided.

Parameter:

| Model:I-P-SMART2-40A/50A/60A -series | | 40A | 50A | | 60A | |
|---|----------------------------------|--|---------------------------|---------------------|------------------------|--|
| | Maudanua Daura D | | DUA | | bUA | |
| Charge Mode | Maximum Power P | | | | | |
| Method | | ge(MPPT),constant voltage, floating charge | | | | |
| System Type | | Automatic recognition | | | | |
| | | DC9V~DC15V | | | | |
| System Voltage | | DC18V~DC30V | | | | |
| | , | DC36V~DC60V | | | | |
| Soft Start Time | 12V/24V/48Vsyste m | ≤10S | | | | |
| Dynamic Response Recovery Time | 12V/24V/48Vsyste m | 500us | | | | |
| Conversion Efficiency | 12V/24V/48Vsyste m | ≥96.5%,≤99% | | | | |
| PV Modules Utilization Rate | 12V/24V/48Vsyste m | ≥99% | | | | |
| Input Characteris | | | | | | |
| | | DC18V~DC150V | | | | |
| MPPT Working Voltage and Range | 24V system | DC34~DC150V | | | | |
| | 48V system | DC65~DC150V | | | | |
| | | DC16V | | | | |
| Low Voltage Input Protection Point | 24V system | DC30V | | | | |
| | | DC60V | | | | |
| Low Voltage Input Recovery Point | | DC22V | | | | |
| Low Voltage input Necovery Forms | | DC34V | | | | |
| | | DC65V | | | | |
| Max DC Voltage | 12V/24V/48V system | DC160V | | | | |
| Input Overvoltage Protection Point | 12V/24V/48V | DC150 | | | | |
| | system | | | | | |
| Input Overvoltage Recovery Point | system | DC145V | 70014 | | 000W | |
| Max DV Power | | 570W 1130W | 700W 1400W | | 900W 1700W | |
| Max. PV Power | | 1130W 2270W | 2800W | | 1700W 3400W | |
| Output Characteristics | 40V System | 227000 | 2000W | ŀ | 5400W | |
| Selectable Battery Types (Default type is GEL | | | ented, Gel, NiCd batter | | | |
| battery) | system 12V/24V/48V | (Other types of the | e batteries also can be o | defined) | | |
| Constant Voltage | system | Please check the charge voltage according to the battery type form. | | | | |
| Floating Charge Voltage | 12V/24V/48V system | rease theth the tharge voltage according to the battery type form. | | | | |
| | | 14.6V | 14.6V | | | |
| Over Charge Protection Voltage | 24V system | 29.2V | | | | |
| | 48V system | 58.4V | | | | |
| Batad Output Current | 12V/24V/48V | 40A | 50A | | 60A | |
| Rated Output Current | system | 40A | DUA | | DUA | |
| Current-limiting Protection | 12V/24V/48V | 44A | 55A | | 66A | |
| | system 12V/24V/48V | | | | | |
| Rate charge current | System | 40A | 50A | | 60A | |
| Temperature Factor | 12V/24V/48V system | ±0.02%/°C | | | | |
| Temperature Compensation | 12V/24V/48V system | 14.2V-(The highest | temperature-25°C)*0.3 | 3 | | |
| Output Ripples(peak) | 12V/24V/48V | 200mV | | | | |
| Output Voltage Stability Precision | system 12V/24V/48V | ≤±1.5% | | | | |
| , | system 12V/24V/48V | | | | | |
| Charge voltage Peak-Peak Ripple | System 12V/24V/48V | 200mV | | | | |
| Charger voltage accuracy | System | ≤±1.5% | | | | |
| Discharge characteristic | Continuit | r or LAN | | | | |
| Setting Control | Controller | UI LAN | | | | |
| Max discharge current | 12V/24V/48V System | 40A | | | | |
| Discharge protection | 12V/24V/48V | | | | | |
| | System 12V/24V/48V | fuse 30A*2 | | | | |
| Double-time control | System | on in morning ,off | in morning / On in night | t ,off in night | | |
| ON / OFF mode | System | ON / OFF | | | | |
| PV voltage control | 12V/24V/48V System | PV voltage on∏PV voltage off | | | | |
| PV voltage / time delay control | 12\//24\//48\/ | PV voltage on∏time | e delay off | | | |
| Discharge voltage protection | 12V/24V/48V | Output off when it under setting voltage; Factory set is 10.5 .(Note : set based on 1 battery) | | | | |
| 5 5 1 | System | | | , | | |
| Communication Features | 127/12/1/40:1 | | | | | |
| RS232 Communication | 12V/24V/48V | Chose COM communication | | | | |
| | System | | | | | |
| LAN Communication | 12V/24V/48V System | Set IP and Gate ad | dress for controller and | solar eagle ;Then c | hose TCP communication | |
| Protection Input Low Voltage Protection | | Check the input characteristics | | | | |
| Input Overvoltage Protection | Check the input characteristics | | | | | |
| Input Polarity Reversal Protection | yes | | | | | |
| Output Overvoltage Protection | Check the output characteristics | | | | | |
| | the output t | | | | | |

| Output Polarity Reversal Protection | yes | | |
|-------------------------------------|--|--|--|
| Short-circuit Protection | Recover after eliminating the Short-circuit fault, no problem for long term Short-circuit | | |
| Temperature Protection | 95℃ | | |
| Temperature protection | Above 85°C, decrease the output power, decrease 3A per degree. | | |
| Other Parameters | | | |
| Noise | ≤40dB | | |
| Thermal methods | Forced air cooling, fan speed rate regulated by temperature, when inner temperature is too low, fan ran slowly or stop; when controller stop working, fan also stop ran. | | |
| Components | World brand raw materials. Compliance with EU standards. All rated temperature of electrolytic capacitors not less than 105°C | | |
| Smell | No peculiar smell and toxic substances. | | |
| Environment Protection | Meet the 2002/95/EC,no cadmium hydride and fluoride | | |
| Physical | | | |
| Measurement DxWxH (mm) | 270*185*90 | | |
| N.G(kg) | 3 | | |
| G.N(kg) | 3.6 | | |
| Color | Blue/Green (optional) | | |
| Safety | CE, RoHS, PSE,FCC | | |
| EMC | EN61000 | | |
| Type of Mechanical Protection | IP21 | | |
| Environment | | | |
| Humidity | 90%RH (no condense) | | |
| Altitude | 3000m | | |
| Operating Temperature | ~ +40°C | | |
| Storage Temperature | -40°C ~ +75°C | | |
| Atmospheric Pressure | 06kPa | | |

Note:We provide OEM and ODM service. The 36V/72V/96V model also can be custom made for you.

Product Parts:

| NO. | Quantity | Description | |
|-----|----------|---|--|
| 1 | 1 unit | Charge controller | |
| 2 | 2 pc | Terminals | |
| 3 | 2 pc | Gallow pulley | |
| | | (For install the controller on the wall) | |
| 4 | 4 set | Screw | |
| | | (For install the controller on the wall) | |
| 5 | 1 pc | 232 turn to RJ45 communication cable | |
| 6 | 1 pc | User manual | |
| 7 | 1 pc | Temperature sensing wire | |
| 8 | 2 pc | Fuse wire | |



The Main Information of MPPT



Note: 1) All above information is a sample which is the working state of MPPT in sometime . In different working stage the parameters will change like work mode , charge current ,charge mode ,charge power and so on ; In the fault mode it will show fault mode ;

2) If all above dates show **X X** means this could change ;the details please check the manul

Upper Computer Software and Test Software






The interface of upper computer software working state

The interface of upper computer software parameter setting state



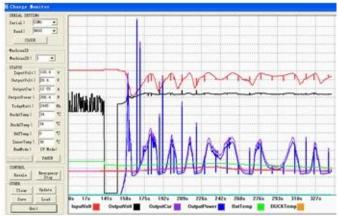


Upper computer software on/off interface and generating capacity record clean interface

The interface of test software working state

Note: 1) Attachment have upper computer software, suitable for all computer system

- 2) Trafficker will provide neutral upper computer software and CD , or software with customer's logo .
 - 3) WIN7, WIN8 system user, please log in as administrator: More details please check the manul.

MPPT Connection

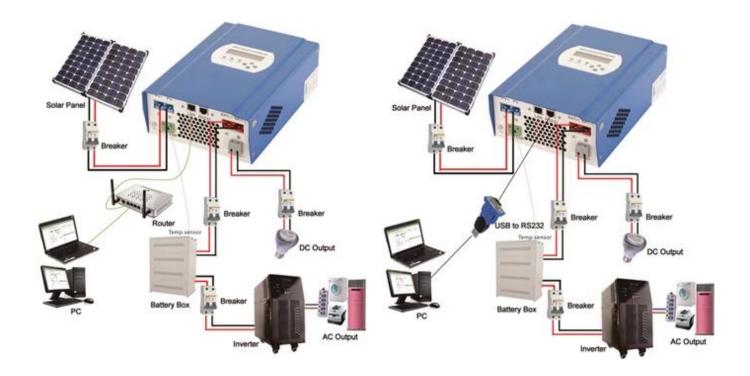

Note: 1) Above is off-grid solar system connection picture;

2) There are many way s for communication , details please check manul;

 $\textbf{Other Parameters:} \ \ \text{Details please check design brief } \ \ \underline{\ } \ \text{technical documents } \ \underline{\ } \ \text{product manual }.$