Feature:

1.MPPT charge mode, conversion efficiency upto 99%

2.12V / 24V / 48V system auto recognize

3.Wide range of PV input with max. Is DC150V.

4. Journal function, Save function set, Date, time, Generating capacity and so on.

5. Charge mode: three stages (fast charge, constant charge, floating charge) . It prolongs service life of the batteries.

6.Discharge mode: ON mode, OFF mode, double time control mode, PV voltage control mode, PV voltage plus time delay mode and so on.

7.Recommended battery types: Sealed lead acid, vented, gel, NiCd battery Other types of the batteries can also be defined.

8.Most information could be provide by LCD and LED like: model number, PV input voltage, battery type, battery voltage, charging current, charging power, working status and so on Also customer information like company name, website and logo can be. added into Solar Eagle software.

9.RS232 and LAN communication port. IP and Gate address could be user define it satisfy global area.And communication protocol can be provided to help customer manage all information.

10. The upper computer software is displayed in 11 languages, it could show work status and set parameters of the discharge system.

11. With intelligent design, the device can be upgraded online lifelong.

12.Adopting the well-known brand components, the devices can suffer the temperature not less than 105 °C .The service life is designed to use for 10 years in theory.

13.Compliance with the 2002 95 EC environment protecting demand, does not include the Cadmium, hydride and fluoride etc material

14.Equipment integrity: controller, CD-ROM (microcomputer software), communication wire, temperature sensing wire, Anderson terminals

15.CE, ROHS certifications approved.

16.2 years warranty. And 3 \sim 10 years extended warranty service also can be provided.

Model: SMART2-40A/50A/60A -series		40A	50A	<u>60A</u>				
Charge Mode	Maximum Power Point Tracking							
Method	3 stages: fast charge(MPPT),constant voltage, floating charge							
System Type		C12V/24V/48V Automatic recognition						
	12V system	DC9V~DC15V						
System Voltage	24V system							
	48Vsystem	DC36V~DC60V						
Soft Start Time	12V/24V/48Vsyst em							
Dynamic Response	12V/24V/48Vsyst	F 0.0						
Recovery Time	em							
Conversion Efficiency	12V/24V/48Vsyst em							
PV Modules Utilization Rate	12V/24V/48Vsyst em	≥99%						
Input Chara	acteristics							
	12V system	DC18V~DC150V						
MPPT Working Voltage and Range	24V system	DC34~DC150V						
	48V system	DC65~DC150V						
	12V system	DC16V						
Low Voltage Input Protection Point	24V system	DC30V						
	48V system	DC60V						
Low Voltage Input Recovery Point	12V system	DC22V						
	24V system	DC34V						
	48V system	DC65V						
Max DC Voltage	12V/24V/48V system	DC160V						
Input Overvoltage Protection Point	12V/24V/48V system	DC150						
Input Overvoltage Recovery Point	12V/24V/48V system	DC145V						
	12V system	570W	700W	900W				
Max. PV Power	24V system	1130W	1400W	1700W				
	48V system	2270W	2800W	3400W				
Output Characteristics								
Selectable Battery Types (Default type is	12V/24V/48V	Sealed lead acid, vented, Gel, NiCd battery						
GEL battery)	system	(Other types of the batteries also can be defined)						

Technical Specification:

Constant Voltage	12V/24V/48V system					
Floating Charge Voltage	12V/24V/48V	Please cheo	cording to the battery type form.			
Floating Charge Voltage	system					
	12V system	14.6V				
Over Charge Protection Voltage	24V system	29.2V				
	48V system 12V/24V/48V	58.4V				
Rated Output Current	system	40A	50A	60A		
Current-limiting Protection	12V/24V/48V system	44A	55A	66A		
Rate charge current	12V/24V/48V System	40A	50A	60A		
Temperature Factor	12V/24V/48V system	±0.02%/°C				
Temperature Compensation	12V/24V/48V system	14.2V-(The	14.2V-(The highest temperature-25°C)*0.3			
Output Ripples(peak)	12V/24V/48V system	200mV	200mV			
Output Voltage Stability Precision	12V/24V/48V system	≤±1.5%	≤±1.5%			
Charge voltage Peak-Peak Ripple	12V/24V/48V System	200mV				
Charger voltage accuracy	12V/24V/48V System	≤±1.5%	≤±1.5%			
Discharge characteristic						
Setting Control		roller or LAN				
Max discharge current	12V/24V/48V System	40A	40A			
Discharge protection	12V/24V/48V System	fuse 30A*2	fuse 30A*2			
Double-time control	12V/24V/48V System	On in morni	On in morning ,off in morning / On in night ,off in night			
ON / OFF mode	12V/24V/48V System	ON / OFF	ON / OFF			
PV voltage control	12V/24V/48V System	PV voltage	PV voltage on∏PV voltage off			
PV voltage / time delay control	12V/24V/48V System	PV voltage on⊡time delay off				
Discharge voltage protection	12V/24V/48V System	Output off when it under setting voltage; Factory set is 10.5 .(Note : set based on 1 battery $)$				
Communication Features	bybtom	pattory /				
RS232 Communication	12V/24V/48V System	Chose COM	Chose COM communication			
LAN Communication	12V/24V/48V System	Set IP and O	Set IP and Gate address for controller and solar eagle ;Then chose TCP communication			
Protection	•	E.				
Input Low Voltage Protection			nput characteristics			
Input Overvoltage Protection		Check the input characteristics				
Input Polarity Reversal Protection Output Overvoltage Protection		yes Check the output characteristics				
Output Polarity Reversal Protection		ves				
Short-circuit Protection		Recover after eliminating the Short-circuit fault, no problem for long term Short-circuit				
Temperature Protection			95℃			
Temperature protection		Above 85°C	Above 85°C, decrease the output power, decrease 3A per degree.			
Other Parameters						
Noise			≤40dB			
Inermal methods		too low, fan	Forced air cooling, fan speed rate regulated by temperature, when inner temperature is too low, fan ran slowly or stop; when controller stop working, fan also stop ran.			
Components		electrolytic	World brand raw materials. Compliance with EU standards. All rated temperature of electrolytic capacitors not less than 105°C			
Smell Environment Protection		No peculiar smell and toxic substances. Meet the 2002/95/EC,no cadmium hydride and fluoride				
Physical		preet the 2t		iyunue anu nuonue		
Measurement DxWxH (mm)		270*185*90)			
N.G(kg)	3	3				
G.N(kg)	3.6					
Color Safaty		Blue/Green (optional)				
Safety EMC		CE, RoHS, PSE,FCC EN61000				
Type of Mechanical Protection	IP21					
Environment		r:				
Humidity	0~90	0~90%RH (no condense)				
Altitude 0~3000m			n			
Operating Temperature -20°C ~ +40°C						
Storage Temperature		~ +75℃				
Atmospheric Pressure	70~1		, , , , , , ,			
NOTO WO DROUDO UEM and UDM	CONVICO INO 361		r magai aica can ba	CUEROPO PODOCO TOR VOU		

Note: We provide OEM and ODM service. The 36V / 72V / 96V model also can be custom made for you.

Product Parts:

NO.	Quantity	Description		
1	1 unit	Charge controller		
2	2 pc	Terminals		
3 2 pc		Gallow pulley		
		(For install the controller on the wall)		
4 4 set	4 set	Screw		
		(For install the controller on the wall)		
5	1 pc	232 turn to RJ45 communication cable		
6	1 pc	User manual		
7	1 pc	Temperature sensing wire		
8	2 pc	Fuse wire		
	22.323			



Blue Appearance



Green



Upper Computer Software

Parts

Package


Upper Computer Software and testing Software:



and a start age of the set	Carl Statement And Advertising and		_		_	000
¥ U			Marikani J	ente — Cente mole —		I-Panda*
Tantas .	Ourvey Parameters entiting	Pear Sme control				
	Entertion	•	Aug for			
	Buck charge schape	- 2	here	Fice charge rolage	-86	
	Re. charge carters	45	haste			
	Lost control type	Time (b)	Appelle			
	Monorg toal on brue	1428(\$	Austr	Lost on PV vidtage		
	Managinal of State	10.00[\$	Appen	Lise of Privatege		(mm)
	Night had on Small	18.38(2		Linel Brie Smelhout		(mm)
	Supress of Sea	10.26	Auto	Lost of Safers without	10.5	Apple
-	L					

The interface of upper computer software working state

The interface of upper computer software parameter setting state

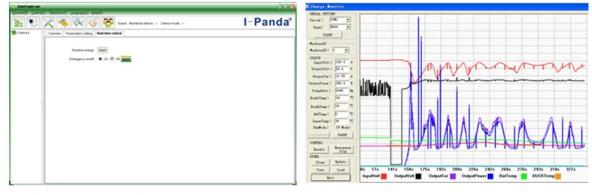

Upper computer software on/off interface and generating capacity record clean interface

The interface of test software working state

Note:

- 1) Attachment is upper computer software which is suitable for all computer systems.
- 2) Trafficker will provide neutral upper computer software and CD, or with customer's logo.
- 3) WIN7, IN8 system user, please log in as administrator. More details please check the manual.

Information on Display and Settable Parameters:


Note:

1) All above information is a sample which is the working state of MPPT in sometime In different working stage the parameters will change like work mode, charge current, charge mode, charge power and so on;. In the fault mode it will show fault mode;

×

2) If all above dates show means this could change; the details please check the manual.

Installation

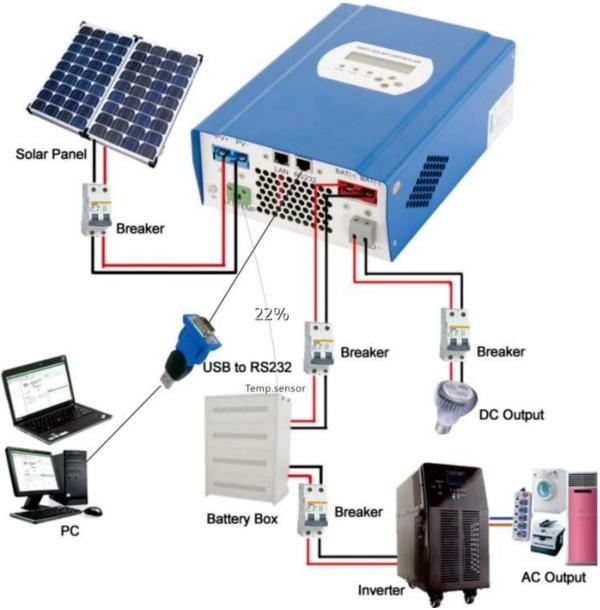

Note:

- 1) Above is off-grid solar system connection picture;
- 2) Other ways for PC-communication, please check the manul for details;

Other Parameters:

Please check design brief, technical documents, product manual for more details.