
## Introduction

Pure sine wave inverter with built-in MPPT controller I-P-HPC-Series is a module design. It has the advantages of high conversion efficiency, low power consumption and strong load-carrying ability. With intelligent control, users can set charging mode, (Utility as complementary power) AC first mode or DC first mode, timing inversion mode and timing utility mode, on/off mode. It is one of advanced hybrid inverter & controller in the world.



# **Application**

- 1.Off-grid solar power system
- 2. Solar and utility complementary power system

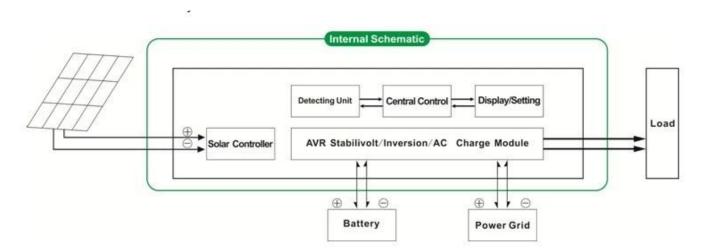


## **Feature**

- 1.Easy to install.To configure a solar system, users just need to connect it with solar panels and batteries
- 2.CPU management, intelligent control, modular design, LCD display
- 3.Built-in MPPT controller, high charging efficiency
- 4.Low power consumption, high conversion efficiency
- 5.Intellectual multi-function, it's convenient for users to make full use of solar energy in different situation

- 6. External battery connection, it's convenient for users to expand back-up power time
- 7.Strong load-carrying ability, low failure rate, easy to maintenance and long service life (under proper operation, it can last at least 5 years)
- 8.Perfect protection:low voltage protection, high voltage protection, over temperature protection, short-circuit protection, overload protection
- 9.CE / EMC / LVD/ RoHS Approvals
- 10.Two years warranty, life-long technical support







### **Function**

- 1. Charging function
- 1.1 PV only mode: when PV and utility are both connected to the inverter, only the PV will charge the battery while utility will not charge the battery.
- 1.2 PV+AC hybrid mode: when PV and utility are both connected to the inverter, both PV and utility will charge the battery.
- 2. Utility as complementary power UPS function
- 2.1AC first, DC standby UPS mode

When utility and battery are connected to the inverter, utility will supply power to the loads preferentially. When utility is cut off, the battery will automatically continue to supply power to the loads.

## Steps are as follows:

- Step 1: When utility power is available, it will drive the loads directly after voltage being stabilized and charge batteries at the same time.
- Step 2: When utility power is cut off suddenly, the inverter will convert DC to AC automatically to ensure uninterrupted power supply within 5ms.
- Step 3: When utility power is available again, it will automatically transfer to utility supplying power to loads and charge batteries at the same time.

# 2.2DC first, AC standby UPS mode:

When utility and battery are connected to the inverter, battery will supply power to the loads prior to utility. When battery capacity is not enough, utility will continue to supply power automatically.

## Steps are as follows:

- Step 1: When battery has enough power, it will drive the loads directly via power inverter
- Step 2: When battery does not have enough power, it will automatically transfer to utility supplying power to the loads
- Step 3: After the battery is fully charged (e.g. by solar or wind charge controller), it will automatically transfer to battery supplying power to the loads.

### 3.Timing function

- 3.1 On/Off mode: Users can set specific time to turn on/off the output of the inverter.
- 3.2 Working mode: Battery or utility switchable mode. Users can set specific time when to use battery or utility supplying power (suitable for areas where electric fee is charged differently in different period)
- 4.Recording/checking function
- 4.1 Inverter fault checking: Users can check the inverter fault information
- 4.2 Discharge time checking: Users can check the discharge time of the battery

#### **Parameter**

Parameter Model	1000W	1500W	2000W	3000W	4000W	5000W
Rated Output Power	1000W	1500W	2000W	3000W	4000W	5000W
Peak Power	2000W	3000W	4000W	6000W	8000W	10000W
Battery (Lead-acid battery□	24V	24V/48V(optional)		48V		

Charging P	Parameter									
Charge Mo	nde∏setting∏	PV charge								
Charge Mode setting		PV charge + utility charge								
	Voltage	24V	24V/48V			48V				
	Current	20A	25A	30A	40A	40A	40A			
	Max PV Input	100V								
	Voltage	1001	TOO A							
Controller	r PV Charge Efficiency	95%~99%								
	Lineiericy	24V: 24V: 24V: 24V: 112CW								
	Max PV Input	568W	710W	852W	24V:1136W		2272W			
	Power		48V1420W	.48V:	48V:	2272W				
			48V1420W	/1704W	2272W					
Utility	AC Charge	0154	•			•	•			
	Current	0~15A								
	Charge Mode	3-Stage (	Charging							
Inversion p										
		220V±3% or 230V±3 or 240V±3% or 100V±3%								
AC Output		or 110V±3% (optional)								
		50Hz±0.5 or 60Hz±0.5 (optional)								
Output wa	<i>7</i> 1			•	rmonic Disto	ortion THD	≤3			
Overload a	•	>120% 1 min, >130% 10s								
Power Consumption (under normal working mode)			24V: 0.5A				0.65A			
		0.4A	48V: 0.4A	48V: 0.45A	48V: 0.5A	0.6A				
Power Con	sumption			0.1571						
(under slee	-	1-6W								
Inverter Conversion		85%~92%								
Efficiency										
<b>Utility Mod</b>	le									
AC Input	Voltage	220V±359	% or 110V+	35%∏optic	nal[]					
		The same as utility's frequency								
AC Output	Voltage	220V±5% or 110V+5%∏optional∏								
AC Output	Frequency	The same	The same as utility's frequency							
Overload A	,	>120% 1 min,>130% 10s								
(AC first or	DC first) priority									
Switch Time		AC first, DC standby								
		DC first, AC standby								
		<5ms [AC to DC / DC to AC]								
Power On		Set by users								
□setting□		Fimed on / off AC output automatically								
General Pa										
Display		LCD+LED								
		Input voltage, output voltage, output frequency, battery								
					Information					
Protection		Overload, short-circuit, high-voltage input, low-voltage input,								
			overheat							
Environme	Temperature									
numiaity		10%[]90%								
C: \\\\		≤4000m	410			4F0*2 4 Cd	1.00			
Size W×D	, ,	438*208*413								
Packing Size W×D×H(mm)		520*310*460 540*300*518					518			
<b></b>		15	17	19	25	34	35			
Net Weight (kg)		12	μ/	lта	<b>Z</b> 3	J3 <del>4</del>	၂၁၁			

Gross Weight (kg)	16	18	20	27	40	<b>4</b> 1
Di USS Weight (kg)	ITO .	10	20	<u> </u>	<del>1</del> 0	<b>-</b>

Picture

# I-P-HPC-Series System



I-P-HPC-Series Inverter+Solar Controller



