

說明書

本產品採用PWM脈寬調製30~60kHz，MPPT最大功率點追蹤，RS232通訊，MPPT效率>99%，SMART充電。

產品特點


1. MPPT效率>99%
2. DC12V / 24V / 48V
3. PV DC100V
4. 3路MPPT
5. PV
6. 4路
- 7.
8. RS232
- 9.
10. CE, RoHS, FCC
11. 2~3~10

規格

- 產品名稱
- 產品型號
- 產品規格
- 產品尺寸
- 產品重量
- 產品顏色
- 產品包裝
- 產品附件

圖示

□□□□□□□□□□□□□□□□

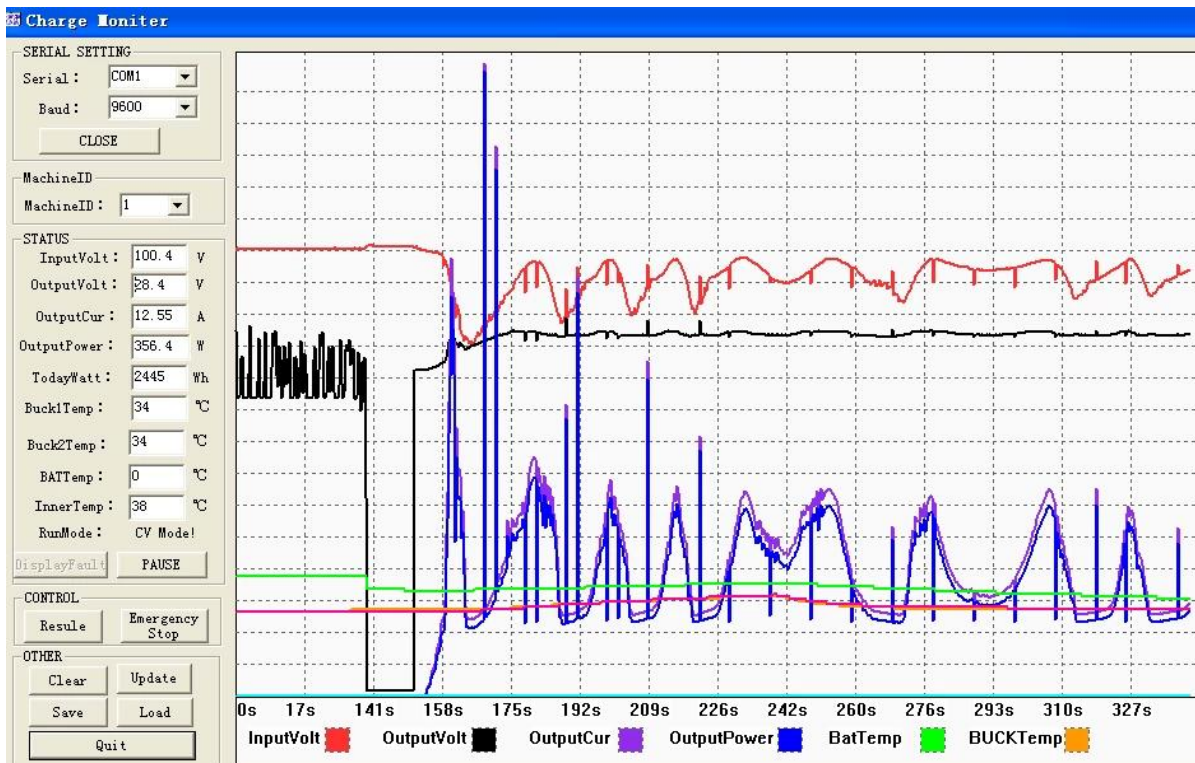

□□□□□□

MPPT□□□□□□□□□□□□		20A
I-P-E-SMART-12V / 24V / 48V□□□□		
□□□□	MPPT□□□□□□□□□□	
□□□□	□□□□□□□□MPPT□□□□□□□□□□	
□□□□□□□□	DC12V / 24V / 48V □□□□	
□□□□	12V□□□□	DC9V□DC15V
□□□□	24V□□□□	DC18V□DC30V
□□□□□□□□	48V□□□□	DC36V□DC60V
□□□□□□□□	12V / 24V / 48V□□□□ ≤3S	
□□□□	12V / 24V / 48V□□□□ 500US	
□□□□□□	MPPT□□ 12V / 24V / 48V□□□□ ≥96.5□□≤99□	
□□□□		
MPPT□□□□	12V□□□□	DC14V□DC100V
□□□□□□	24V□□□□	DC30□DC100V
□□□□□□	48V□□□□	DC60□DC100V
□□□□□□	12V□□□□	DC14V
□□□□□□	24V□□□□	DC30V
□□□□□□	48V□□□□	DC60V
□□□□□□	12V□□□□	DC18V
□□□□□□	24V□□□□	DC34V
□□□□□□□□	48V□□□□	DC65V
□□□□□□□□□□	12V / 24V / 48V□□□□	DC110V
□□□□□□□□□□	12V / 24V / 48V□□□□	DC100V
□□□□□□□□	12V□□□□□□W□	426W
□□□□□□□□	24V□□□□W□	852W
□□□□□□□□	48V□□□□□□W□	1704W

CHARGE CHRECTRESTICS

<p>XXXXXXXXXXXX XXXXXXXXXXXXX XXXXXX</p>	12V / 24V / 48VXXXX	XXXXXXXXXXXXXXXXXXXX XXXXXXXXXXXXXXXXXXXX
XXXX	12V / 24V / 48VXXXX	XXXXXXXXXXXXXXXXXXXX
XXXXXX	12V / 24V / 48VXXXX	XXXXXXXXXXXXXXXXXXXX
XXXXXX	12V / 24V / 48VXXXX	20A
XXXX XX	12V / 24V / 48VXXXX	25A
XXXX	12V / 24V / 48VXXXX	$\pm 0.02\% / \text{°C}$
XXXX	12V / 24V / 48VXXXX	14.2V-XXXXXX-25°C)* 0.3
XXXXXXXXXXXXXX	12V / 24V / 48VXXXX	200mVXX
XXXXXXXXXX XX	12V / 24V / 48VXXXX	$\leq \pm 1.5\%$
XXXXXXXXXX		
XXXX		XXXXXXXXXXXXXX
XXXXXX XXXXXX		XXXXXX10.5VXXXX11VXXXXXXXXXX
XXXXXX		30A
XXXX XXXXXXXXXXXXXX		XXXXXXXXXXPVXXXXXXXXXXXX XXXXXXXXXXXXXXXXXXXX
XXXXXXXXXX		
LEDXXXXXXXXXX		XXXXXXXXXXXXXX
LEDXXXXXXXXXXXXXX		XXXXXXXXXXXXXXXXXXXXLOADXXXXXXXXXXXX
PCXXXXXXXXXXXX		RS232
XXXXXXXXXXXXXX		
XXXX		$\leq 40\text{dB}$
XXXXXXXXXX		XXXXXXXXXX XXXXXXX XX
XXXXXXXXXX		EUXXXXXXXXXXXXXX
XX		FCC ROHS CE
XX		
XX		0%90%RHXXXXXXXXXX
XX		0%3000XXXXXX
XXXXXX		-20°C+ 50°C
XXXXXX		-40°C+ 75°C
XXXX		70%106kPaXXXXXXXXXX





中外运敦豪





