









□□□□□□


MPPT□□□□□□□□□□ □□□□ <a href="#">I-P-E-SMART-12V / 24V / 48V□□□□</a>	30A
□□□□	MPPT□□□□□□ □□□□
□□□□	□□□□□□ □□□□MPPT□□□□□□□□□□



電源	DC5V 1A PV 電源モジュール	
動作電圧	3.3V	
消費電力	0.5W	
LED駆動電流	10mA	
LED駆動電圧	3.3V	
PC接続	RS232	
筐体	ABS樹脂	
筐体色	黒色	
筐体寸法(DxH)	205mm x 168mm	
筐体重量	1.8kg	
筐体材質	ABS樹脂	
筐体強度	IP25	
筐体耐熱性	-20℃ ~ +50℃	
筐体耐湿性	0 ~ 90%RH	
筐体耐振動	0 ~ 3000rpm	
筐体耐衝撃	70 ~ 106kPa	
筐体耐電圧	≤40dB	
筐体耐電流	0.5A	0.5A
筐体耐電圧	EU規格	
筐体耐電圧	FCC \ ROHS \ CE	
筐体耐電圧	205 * 168 * 60	
筐体耐電圧	265 * 196 * 110	
筐体耐電圧	1.8kg	
筐体耐電圧	2kg	
筐体耐電圧	IP25	
筐体耐電圧	0 ~ 90%RH	
筐体耐電圧	0 ~ 3000rpm	
筐体耐電圧	-20℃ ~ +50℃	
筐体耐電圧	-40℃ ~ +75℃	
筐体耐電圧	70 ~ 106kPa	

000

# I-P-ESmart-Swries System

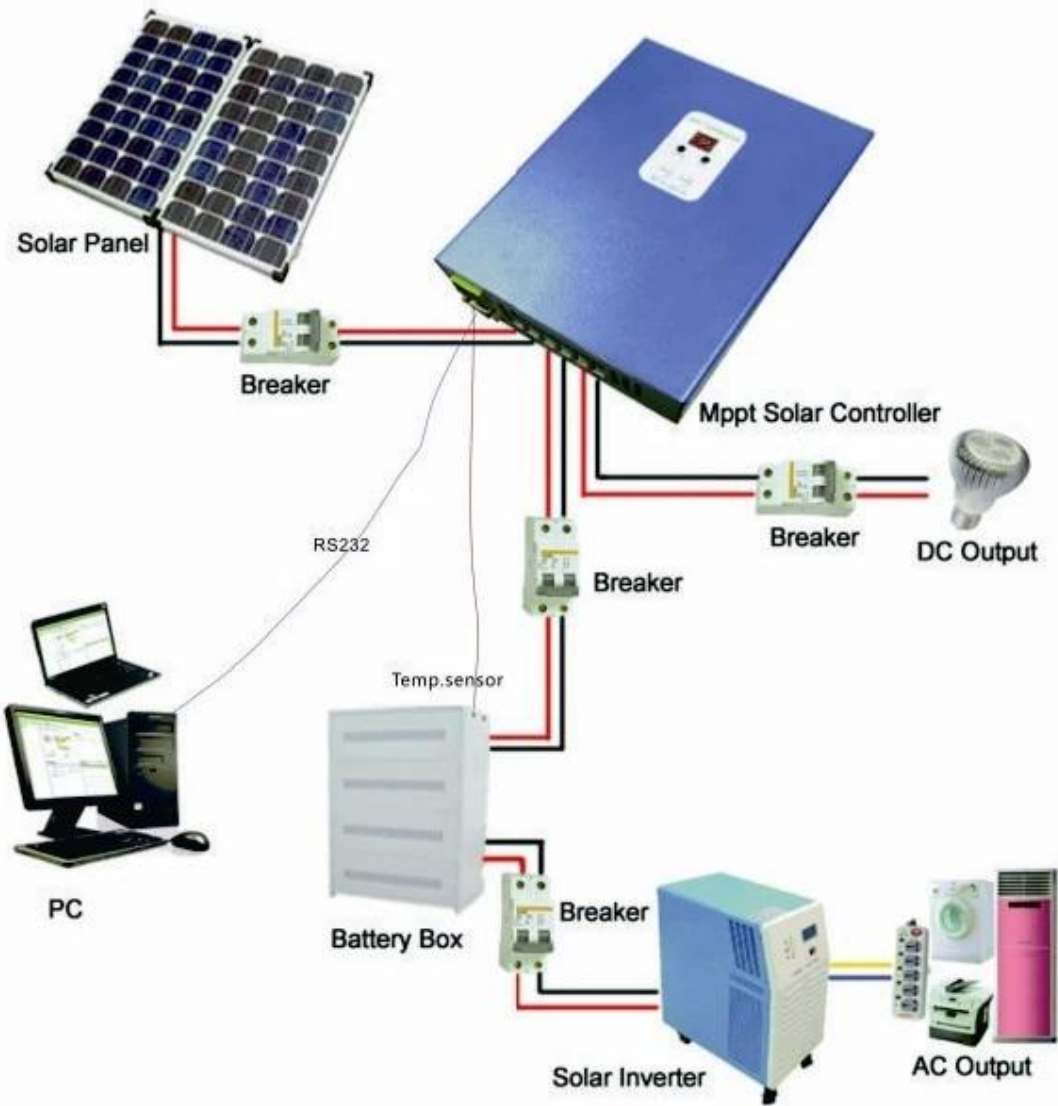



□□ □□□□□□□□□□□□□□&□038;□□□



