



□□□□□□

□□□□-P-MS-C-DC96V-□□□□		20A	30A
□□□□□□	□□□□□□□□		
□□	3□□□□□□□□□□MPPT□□□□□□□□□□		
□□□□□□□□	DC12V / 24V / 48V / 96V	□□□□	
	12V□□□□	DC9V□DC15V	
	24V□□□□	DC18V□DC30V	
□□□□	48Vsystem	DC36V□DC60V	
	96Vsystem	DC72V□DC120V	
□□□□□□□□□□	12V / 24V / 48V / 96V	≤10S	
□□□□□□□□□□	12V / 24V / 48V / 96V	500US	
□□□□	12V / 24V / 48V / 96V	≥96.5□□≤99□	
PV□□□□□□□□□□	12V / 24V / 48V / 96V	≥99□	
□□□□			
	12V□□□□	DC18V□DC150V	
	24V□□□□	DC34□DC150V	
MPPT□□□□□□□□□□	48V□□□□	DC65□DC150V	
	96Vsystem	DC125□DC300V	
	12V□□□□	DC16V	
	24V□□□□	DC30V	
□□□□□□□□□□	48V□□□□	DC60V	
	96Vsystem	DC120V	

DC22V	12V	
DC34V	24V	
DC65V	48V	
DC125V	96Vsystem	
DC160V	12V / 24V / 48V	
DC300V	96Vsystem	
DC150	12V / 24V / 48V	
DC300V	96Vsystem	
DC145V	12V / 24V / 48V	
DC295V	96Vsystem	
	12V	280W
	24V	560W
	48V	1120W
	96Vsystem	2240W
		450W
		850W
		1700W
		3400W
電圧		
12V / 24V / 48V / 96Vsystem	NiCd	
12V / 24V / 48V / 96Vsystem		
12V / 24V / 48V / 96Vsystem		
12V	14.6V	
24V	29.2V	
48V	58.4V	
96V	116.8V	
12V / 24V / 48V / 96Vsystem	20A	30A
12V / 24V / 48V / 96Vsystem	25A	35A
12V / 24V / 48V / 96Vsystem	± 0.02 /°C	
12V / 24V / 48V / 96Vsystem	14.2V-25°C * 0.3	
12V / 24V / 48V / 96Vsystem	200mV	
12V / 24V / 48V / 96Vsystem	$\leq \pm 1.5$	
機能		
LCD	LCD	
LED	3 LED	
PC	RS232 LAN	
環境		
	95°C	
	85°C 3A	
音響		
	≤ 40 dB	
	EU	
	105°C	
	2002/95 / EC	
寸法		
DxWxH	270 * 185 * 90	
N.G	3	
G.N	3.6	
	CE RoHS PSE FCC	
EMC	EN61000	
	IP21	
その他		
	90 RH	
	3000	

□□□□	-20°C □ + 40°C
□□□□	-40°C □ + 75°C
□□□□	70□□106kPa □□□□

□□□□□□□□□□□□□□□□□□□□□□

□□□□OEM□ODM service.The 36V / 72V / 96V□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□



PC□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

SolarEagle
System(S) Control(C) Statistics(T) Language(L) Help(H)

Guest Monitored device: COM1[01]_1234567890123456 Device mode: Constant voltage charging **I-Panda®**

Devices
COM1[01]_1234567890123456

Overview Parameters setting Real-time control

Input information

PV voltage: 105.1 V Environment temperature: 38.0 °C

Battery type: Gel Model name: IPANDA-MPPT-60A
Main firmware version: 1.0


Output information

Output voltage: 27.1 V Output power: 0.0 W
Output current: 0.0 A Total power: 3.9 kWh
Battery temperature: 0.0 °C

Real-time events

ID	Level	Time	Event
3001	Messa...	2011-11-05 15:20:...	Communication restore
3002	Messa...	2011-11-05 15:20:...	Communication lost
3001	Messa...	2011-11-05 15:20:...	Communication restore

□1□PC Firmware

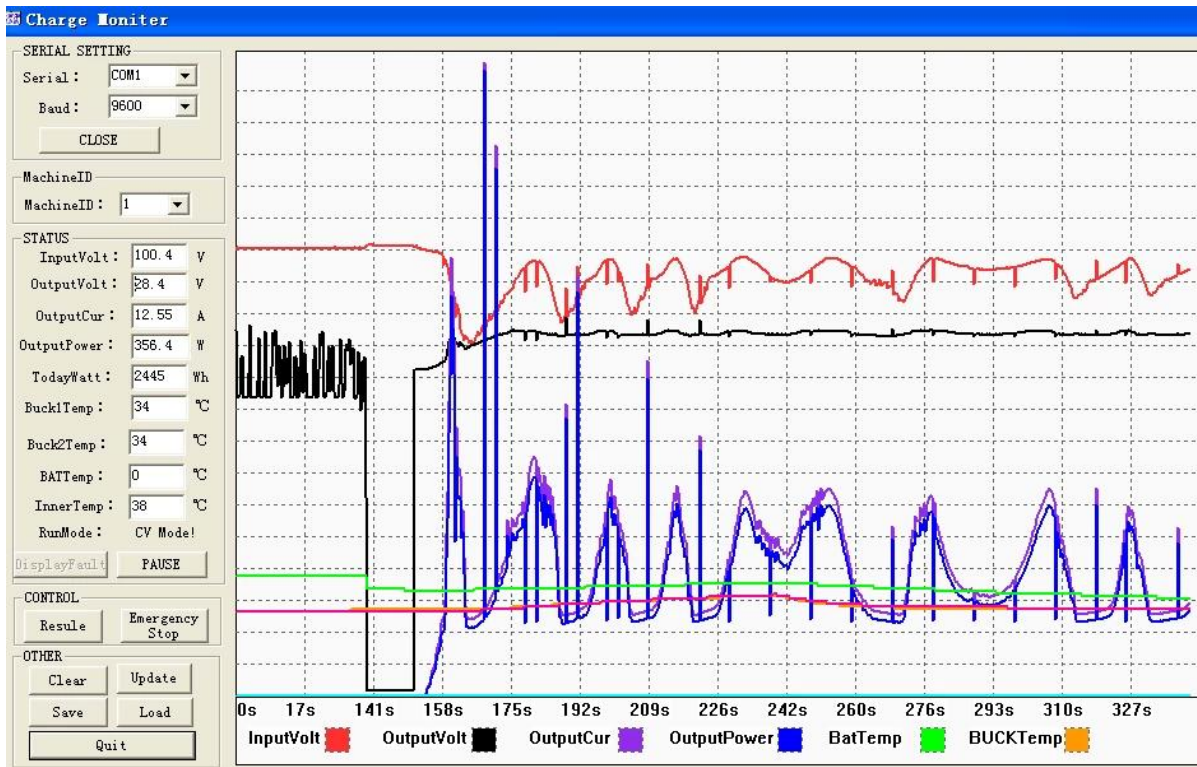

□□□□□□□□□□

□□□□□□□□

1. □□□□□□□□□□□□□□□□□□□□□□□□
2. □□□□□□□□□□□□□□□□
3. □□□□□
4. □□□□□□□□□□

I-□□□□□□□□□□ MPPT□□□□□□□□□□□□□□□□□□□□ Smart1 48V 40A-60A

□□



