

特點

● 40A/60A 30/60
 ● RS 232 / LAN
 ● PV
 ● I-P-TPI2 / UPS

規格

- 1
- 2
- 3
- 4
- 5
- 6

規格

- 1 30-60
- 1 99
- 2 3
- 2 / IP 4 DC
- 3 communication RS232
- 4 100 1

規格

- 1 MPPT 99
- 2 12V / 24V / 48V max PV 3 DC150V
- 4
- 5
6. Charge 3 .It
7. Discharge ON / OFF PV +
8. Recommended NiCd
9. Most LCD LED PV
10. RS232 LAN IP area. And
- 11
12. With
13. Adopting 105°C. The 10
14. Compliance 2002/95 / EC
15. Equipment + CD-ROM + + + ;
16. CE ROHS

規格

I-P-SMART2-40A / 50A / 60A -series	40A	50A	60A
MPPT	3 MPPT		
DC12V / 24V / 48V	DC12V / 24V / 48V		
12V	DC9V	DC15V	
24V	DC18V	DC30V	
48Vsystem	DC36V	DC60V	
12V / 24V / 48Vsystem	≤10S		

CE	2002/95 / EC
RoHS	
DxWxH mm	270 * 185 * 90
N.G kg	3
G.N kg	3.6
IP	IP21
EMC	EN61000
RoHS	CE RoHS PSE FCC
EMC	EN61000
IP	IP21
RoHS	090 RH
RoHS	03000
RoHS	-20°C + 40°C
RoHS	-40°C + 75°C
RoHS	70 106kPa

OEM ODM 36V / 72V / 96V

NO

NO	PC	Port
1	1 PC	LAN
2	2 PC	LAN
3	2 PC	Gallow
4	4 PC	LAN
5	1	RJ45 232
6	1	LAN
7	1	LAN
8	2 PC	LAN



Blue



Green



Upper Computer Software



Parts



Package

□□□□□□□□□□□□□□□□□□□□□□□□□□




The interface of upper computer software working state



The interface of upper computer software parameter setting state





Upper computer software on/off interface and generating capacity record clean interface

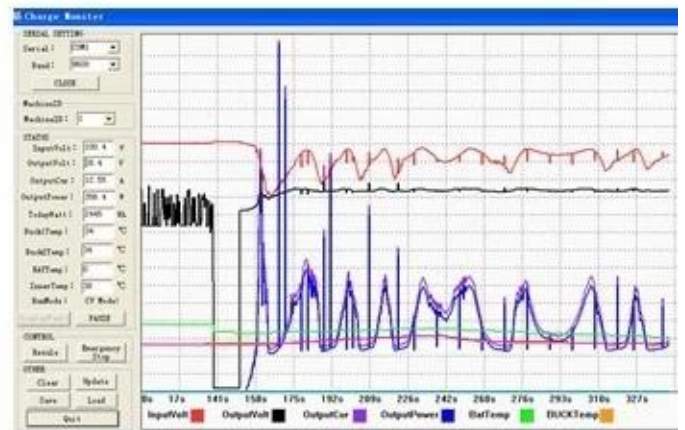

The interface of test software working state

MPPT

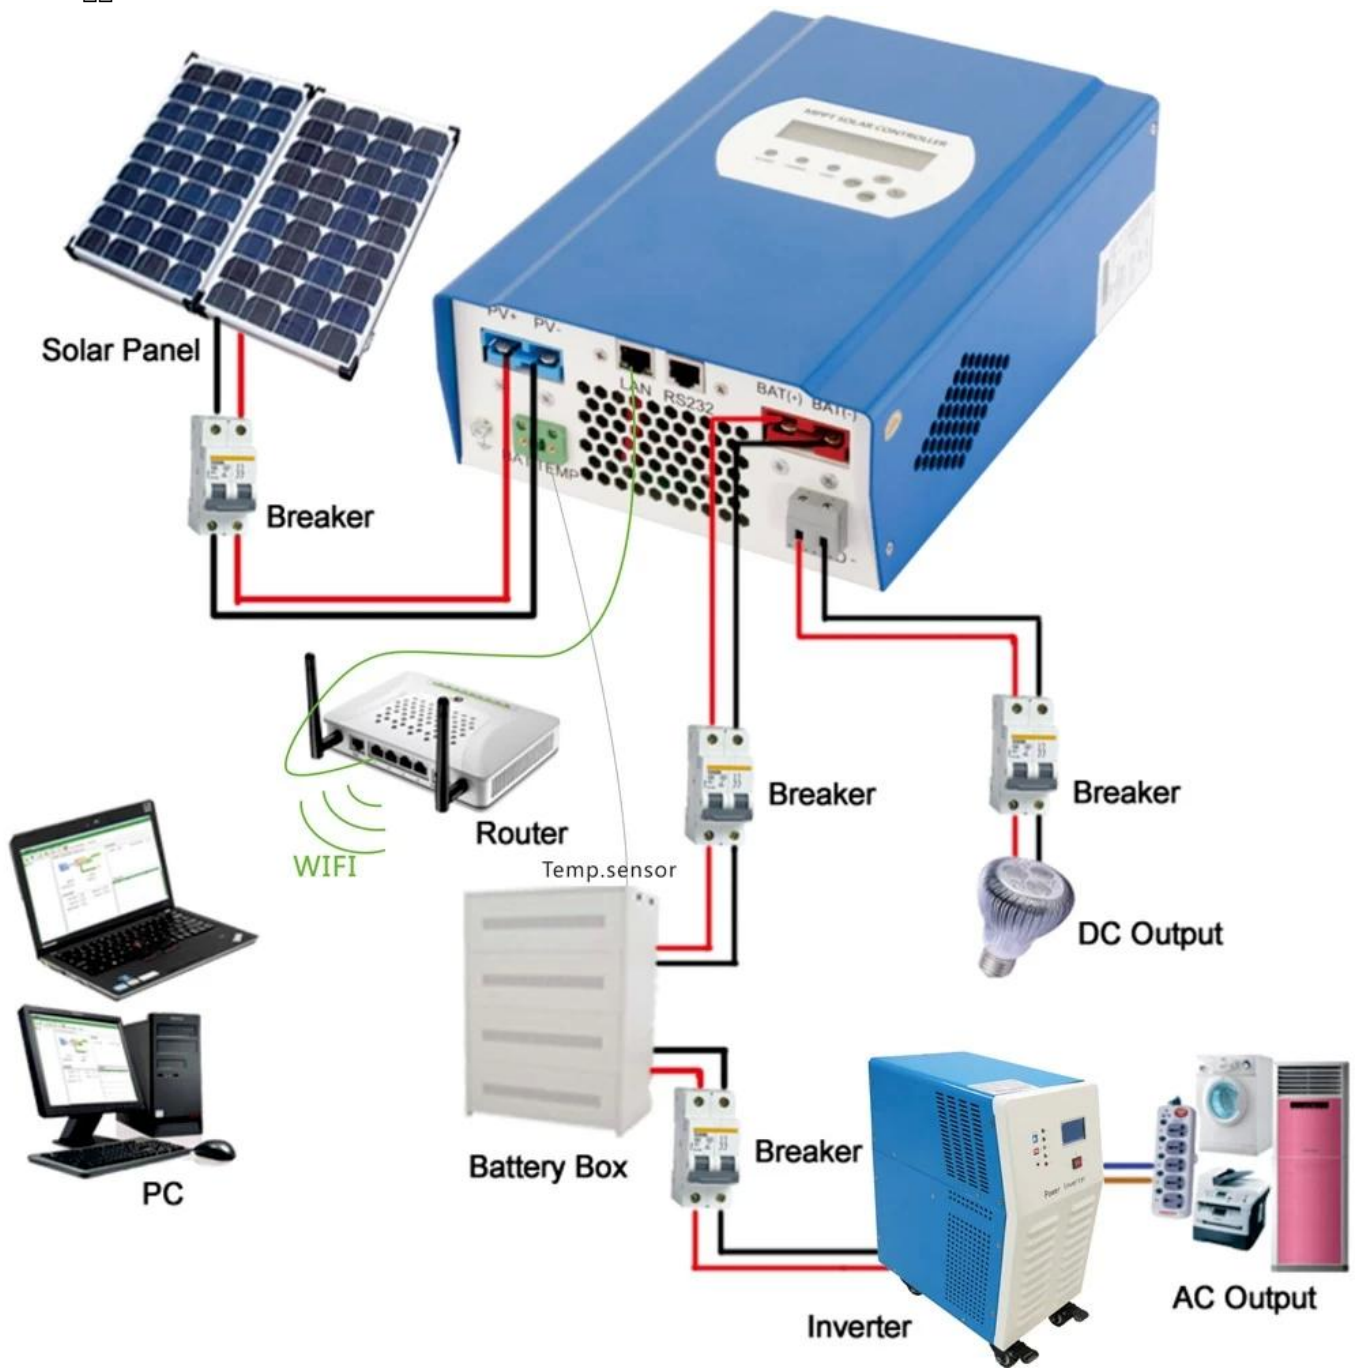

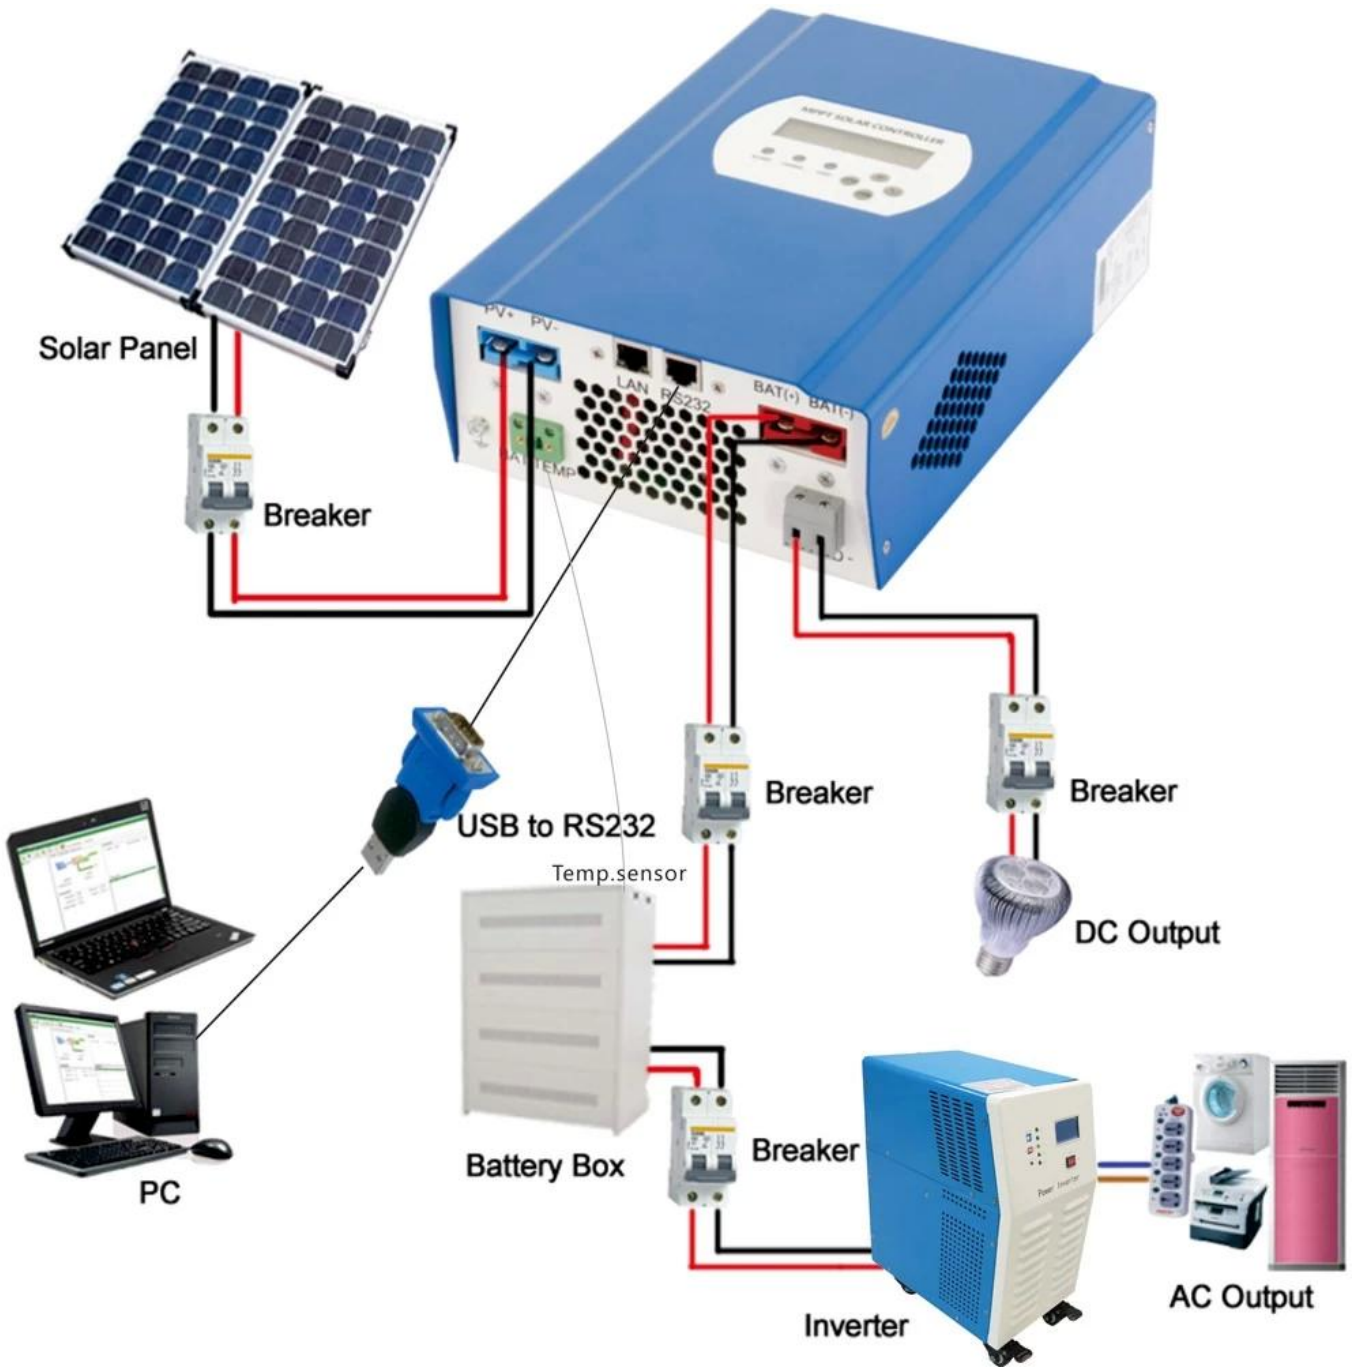

[ISO2008](#)
[ISO2004](#)
[CE](#)
[FCC](#)
[ROHS](#)

1 [OEM](#) [ODM](#)
 2
 3 24
 4