

特點

● 40A/60A 30/60
 ● RS 232 / LAN
 ● PV
 ● I-P-TPI2 / UPS

規格

- 1
- 2
- 3
- 4
- 5
- 6

規格

- 1 30-60
- 1 99
- 2 3
- 2 / IP 4 DC
- 3 commucation RS232
- 4 100 1

規格

- 1 MPPT 99
- 2 12V / 24V / 48V max PV 3 DC150V
- 4
- 5
6. Charge 3 .It
7. Discharge ON / OFF PV +
8. Recommended NiCd
9. Most LCD LED PV
10. RS232 LAN IP area. And
- 11
12. With
13. Adopting 105°C. The 10
14. Compliance 2002/95 / EC
15. Equipment + CD-ROM + + + ;
16. CE ROHS

規格

I-P-SMART2-40A / 50A / 60A -series	40A	50A	60A
MPPT	3 MPPT		
DC12V / 24V / 48V	DC12V / 24V / 48V		
12V	DC9V	DC15V	
24V	DC18V	DC30V	
48Vsystem	DC36V	DC60V	
12V / 24V / 48Vsystem	≤10S		


CE	2002/95 / EC
RoHS	
DxWxH mm	270 * 185 * 90
N.G kg	3
G.N kg	3.6
IP	IP21
EMC	EN61000
RoHS	CE / RoHS / PSE / FCC
EMC	EN61000
IP	IP21
Humidity	0~90%RH
Temp	0~3000
Temp	-20°C ~ +40°C
Temp	-40°C ~ +75°C
Temp	70~106kPa

OEM ODM 36V / 72V / 96V

Accessories

NO	Qty	Description
1	1	Power Adapter
2	2 PC	Power Cable
3	2 PC	Gallow
4	4	Mounting Bracket
5	1	RJ45 232
6	1	Power Cable
7	1	Power Cable
8	2 PC	Power Cable

MPPT

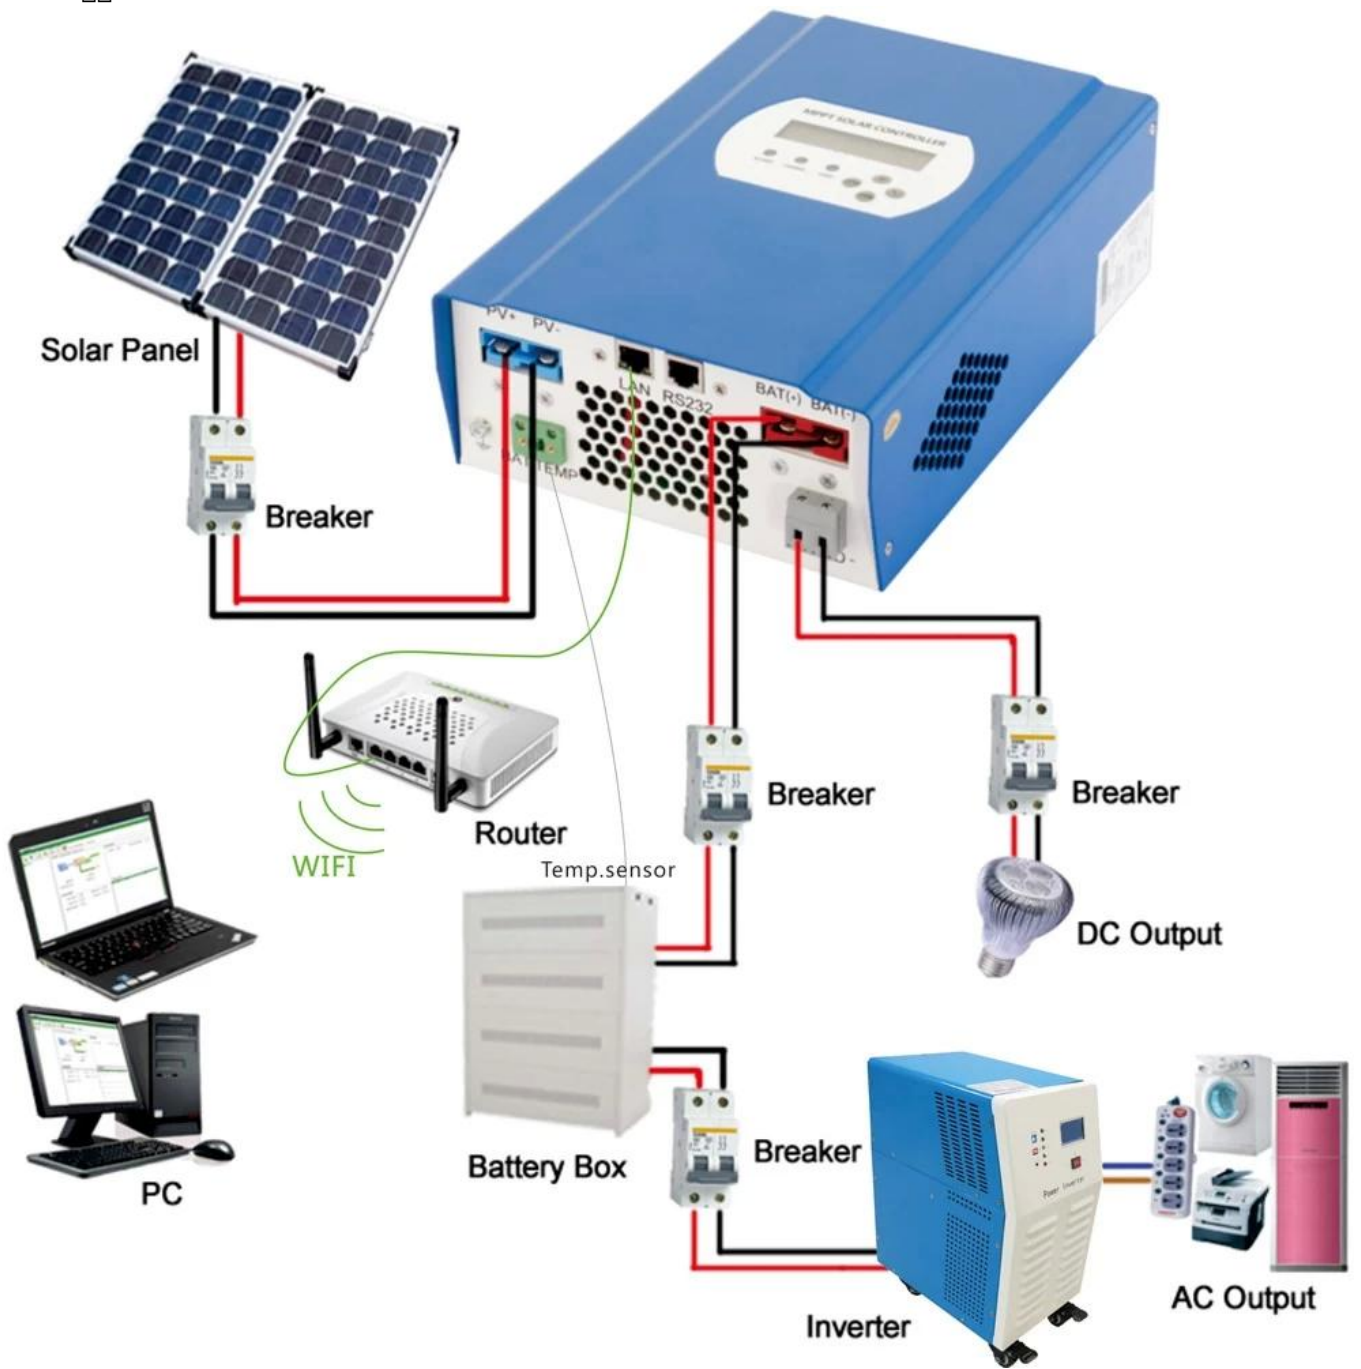

3.2 7-15

3.3 25

4

EMS DHL Express 4.1

4.2

4.3

5 OEM ODM

5.1 OEM ODM