

1. 40A / 60A 30 / 60  
 RS 232 / LAN PV IP-TPI2 / UPS

1. 1.

- 1.
- 2.
- 3.
- 4.
- 5.
- 6.

1. 30-60

1. 99
2. 3 4 DC
3. RS232
4. 1 100

1. MPPT


1. MPPT
2. 12V / 24V / 48V
3. DC150V
- 4.
- 5.
6. Charge 3 .It
7. Discharge / OFF PV + ON
8. Recommended NiCd
9. Most LCD LED PV
10. RS232 LAN IP area. And
- 11.
12. With
13. Adopting 105°C. The 10
14. Compliance
15. Equipment + CD-ROM + + + ;
16. CE ROHS

1. P-SMART2-40A / 50A / 60A -


	40A	50A	60A
	3 MPPT		
	DC12V / 24V / 48V		
	12V	DC9V	DC15V
	24V	DC18V	DC30V
	48Vsystem	DC36V	DC60V
	12V / 24V / 48Vsystem	≤10S	





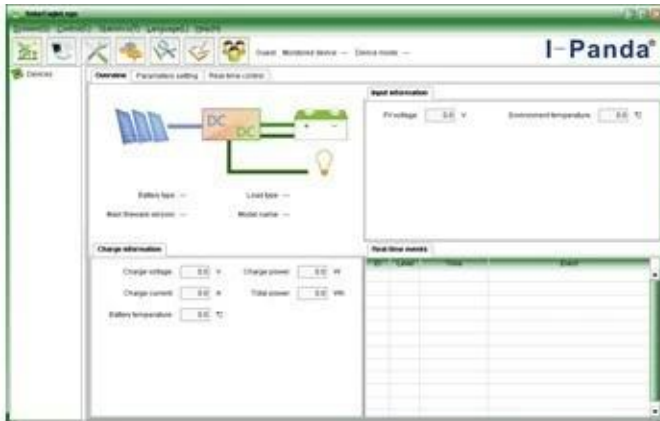


The interface of upper computer software working state

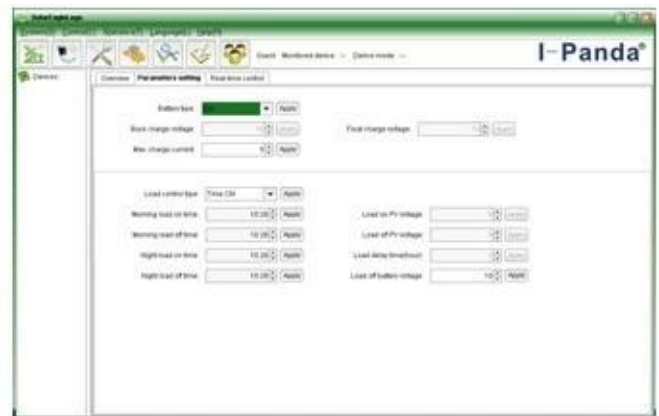

The interface of upper computer software parameter setting state




Upper computer software on/off interface and generating capacity record clean interface

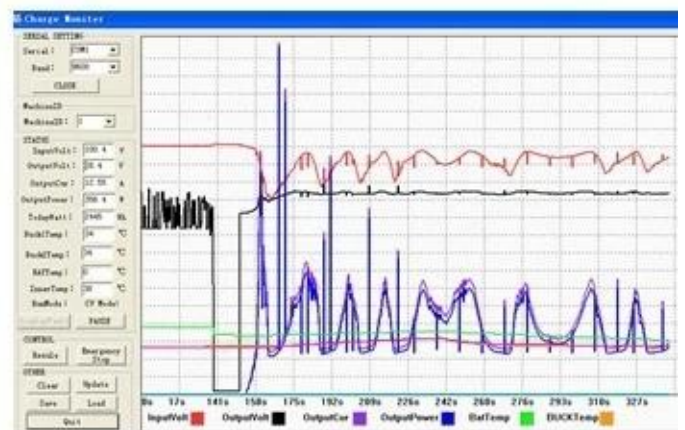

The interface of test software working state

MPPT

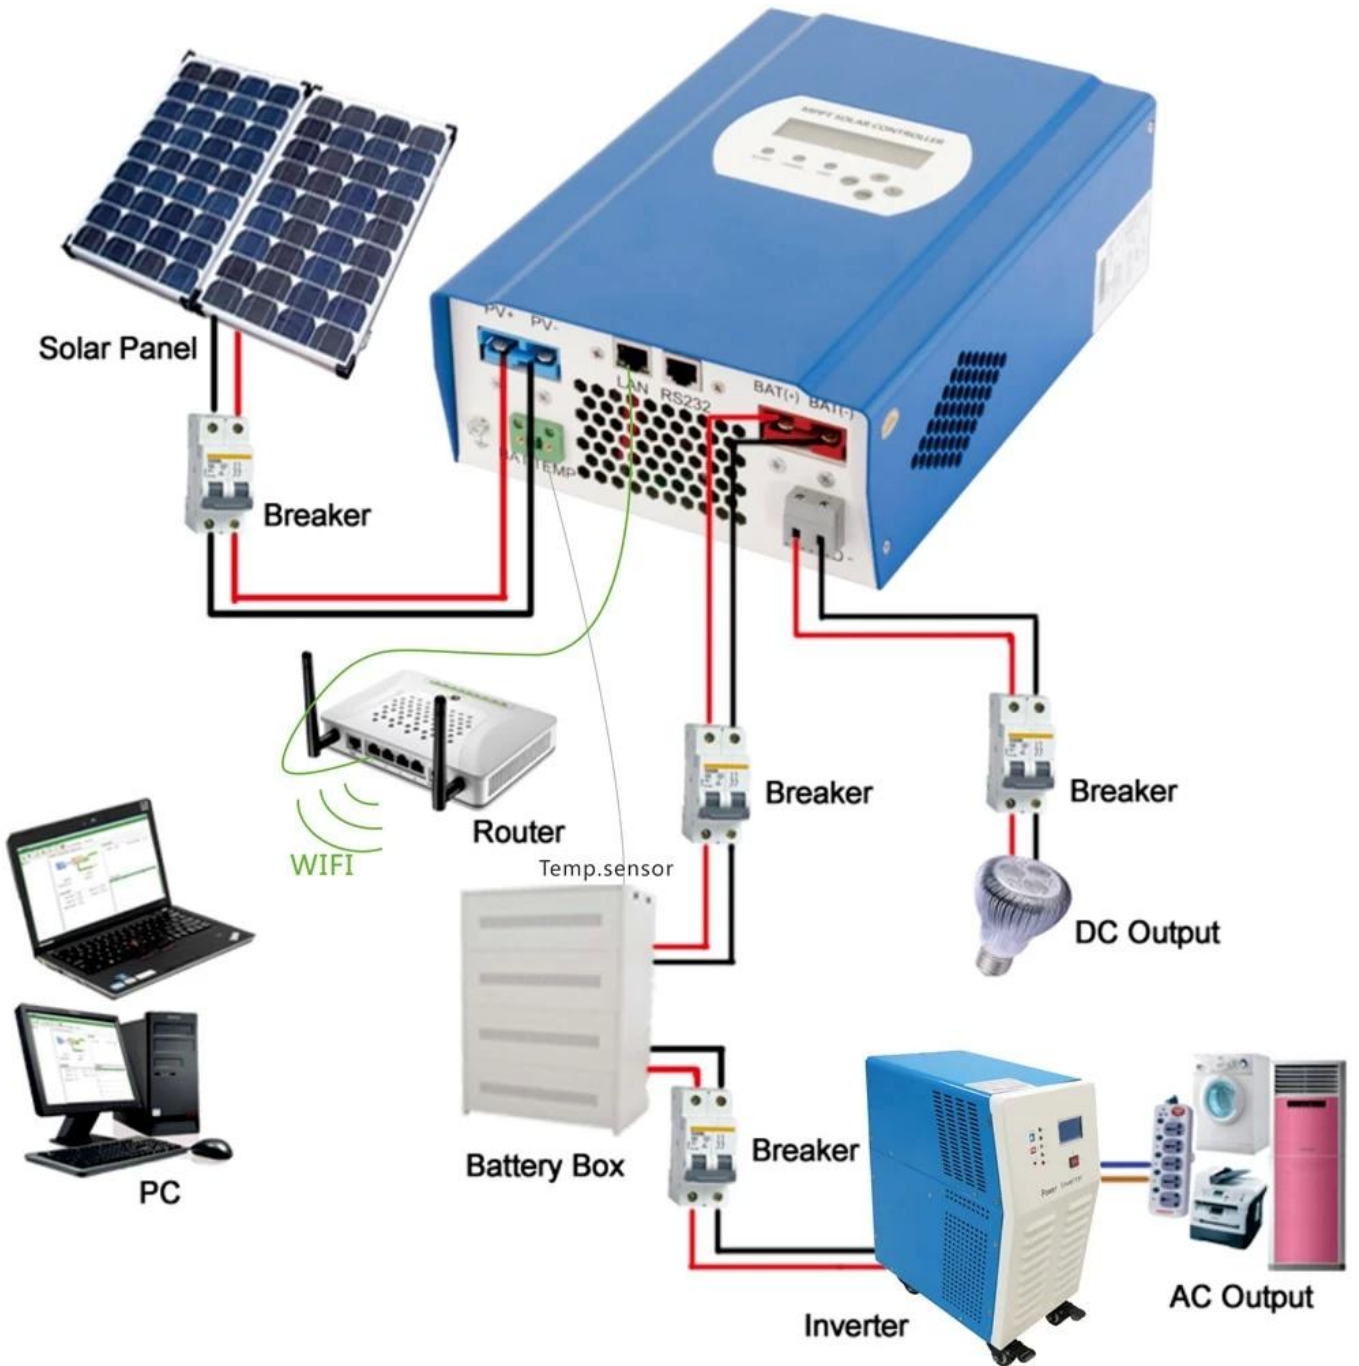

认证  
[ISO2008](#)  
[ISO2004](#)  
[CE](#)  
 FCC  
 ROHS

- 服务  
 1. [OEM/ODM](#) 服务  
 2. 提供详细的技术支持  
 3. 24小时在线客服 3-10分钟  
 4. 提供详细的产品资料