

□□□□

□□□□□□□□□□40A□□ □□□□□□□□□□60A□□□□□□□□□□ □□□□□□□□□□□□30□□□□60□□□□□□□□ □□□□□□□□□□□□  
□□□□□□PV□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□RS 232 / LAN □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□









温度	95°C
湿度	85°C
噪音	≤40dB
安全	符合 CE, RoHS, PSE, FCC, EN61000, IP21
认证	CE, RoHS, PSE, FCC, EN61000, IP21
尺寸	270 * 185 * 90
重量	3
功率	3.6
材料	ABS
EMC	EN61000
防护等级	IP21
工作温度	0°C ~ 40°C
存储温度	-20°C ~ 75°C
湿度	70% ~ 106kPa



Blue



Green



Upper Computer



Package

XXXXXXXXXXXXXXXXXXXXXXXXXXXX




The interface of upper computer software working state



The interface of upper computer software parameter setting state



Upper computer software on/off interface and generating capacity record clean interface

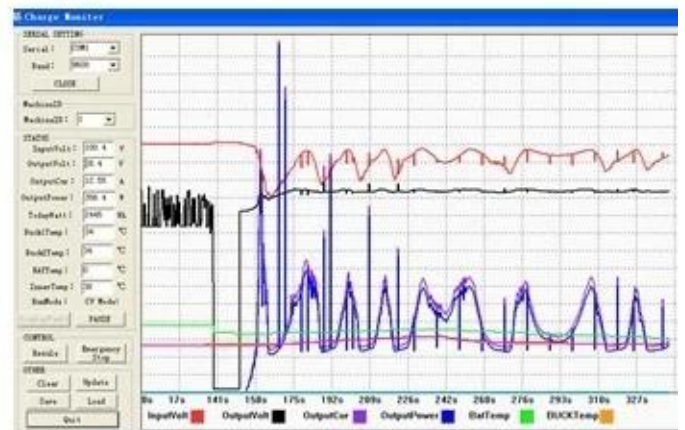

The interface of test software working state

MPPT□□□



[ISO2008](#)  
[ISO2004](#)  
[CE](#)  
[FCC](#)  
[ROHS](#)







