

LCD MPPT 50A 12 v 24 v USB


WISER LCD MPPT 50A 12V 24V USB 5V 3A MPPT Solar Controller




















- 1. MPPT efficiency $\geq 99.5\%$ MPPT efficiency 98%
- 2. 3-year warranty
- 3. 4-pin ON / OFF PV + terminal
- 4. 4-pin terminal
- 5. 3-pin Seal \ Gel \ Flooded terminal
- 6. 7-pin terminal
- 7. The 8-pin terminal
- 8. The 5V 3 A USB terminal
- 9. 5V 3 A USB terminal
- 10. PV terminal
- 11. LCD terminal
- 12. RS485 APP terminal
- 13. Support PC WiFi terminal
- 14. CE \ RoHS \ FCC terminal
- 15. 3-pin 10-pin terminal


















MPPT terminal

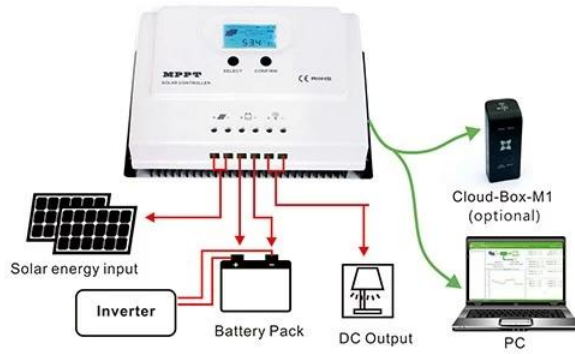

□□□□□□□□□□




LCD□□□□□□□□



On	Mean "ON"	FLD	Mean "FLD"
OFF	Mean "OFF"	GEL	Mean "GEL"
USER	Mean "USER"	SEL	Mean "SEL"

LOAD

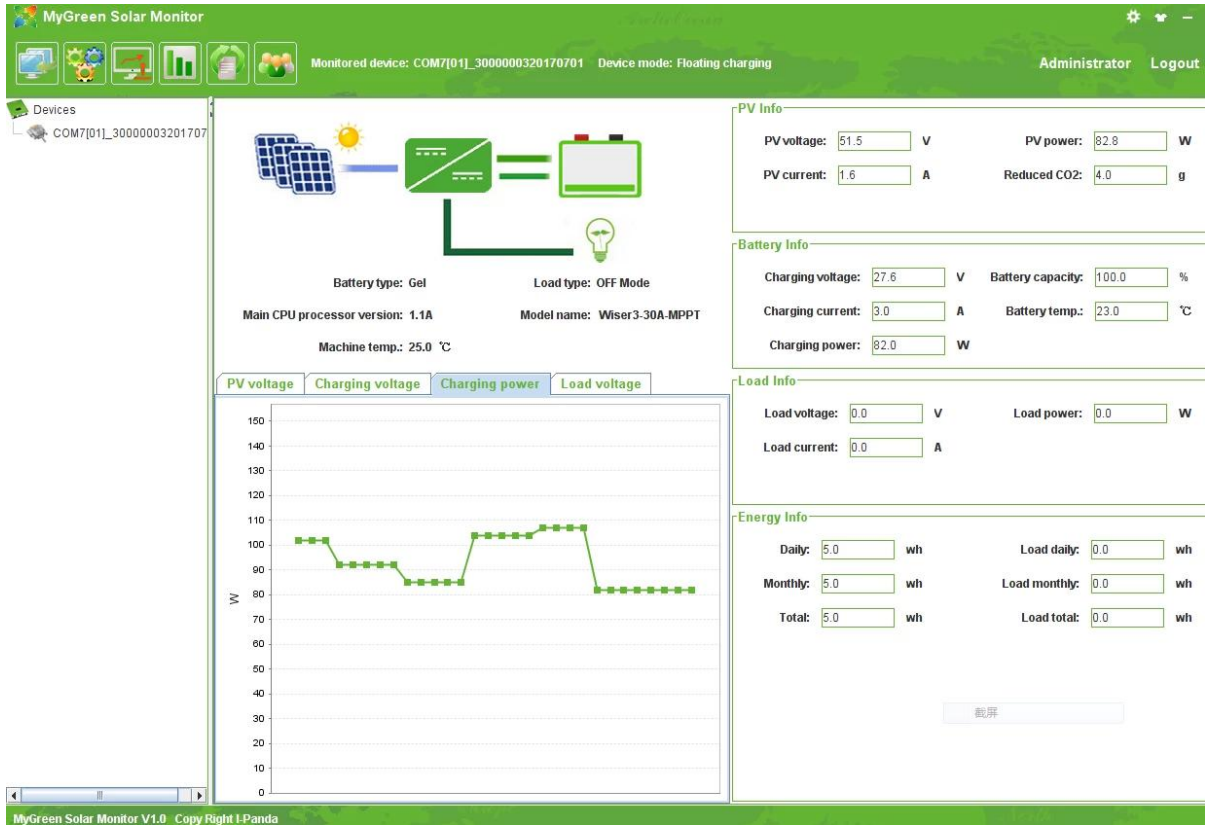

PC SolarEagle

PV LOAD

WISER

WISER		50A	
MPPT	MPPT	MPPT	
	MPPT	≥99.5%	
	MPPT	0.5W~1.2W	
	MPPT	MPPT	
	MPPT	MPPT	
PV	PV	DC150V	
	PV	MPPT+ 3V	
	PV	MPPT+ 2V	
	PV	DC150V	
	PV	12V	650W
	24V	1300W	

功能	输入电压	宽电压输入
	输入功率	50A
	输入端子	3端子输入
	输出端子	3端子输出
LOAD	输出类型	直流输出
	输出能力	50A
	输出控制	On \ Off
	输出保护	PV保护
显示	液晶显示	LCD
接口	通信接口	8RJ45 / RS485 / PC / APP / WiFi
	其他接口	
环境	工作温度	-20°C ~ +50°C
	存储温度	-40°C ~ +75°C
	防护等级	IP43
	安装尺寸	30mm 2
	重量	1.65 kg
	高度	1.95
	宽度	243 * 155 * 80 mm
	深度	290 * 190 * 113 mm

说明

1. 支持Web管理

2. 支持72V / 96V MPPT OEM ODM