□□□

1□MPPT□□□□□□99□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□30□□60□□□□□□□□□□□□□□□□□□
2□□□□□□MPPT□□□□□□TI28035□□□□□□□□□□□□□□□□99□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
3□□□□□□□□□□□□□□□□□□□

□□□ □□□□	12V/24V/48V□□□□	40A	50A	60A
□□□□ □□	12V/24V/48V□□□□	44A	55A	66A
□□ □□	12V/24V/48V□□□□	0.02□/℃±		
□□ □□	12V/24V/48V□□□□	14.2V-□□□□□25℃□* 0.3		
□□ □□□□□□□□□□	12V/24V/48V□□□□	200mV□		
□□□□□□□□□□□□□□	12V/24V/48V□□□□	≤±1.5□		
□□□□□□□				
LCD□□□□□□□		□□□□□□□□□□□□□□

Note:We provide OEM and ODM service.The 36V/72V/96V model also can be custom made for you.

Product Parts:

NO.	Quantity	Description
1	1 unit	Charge controller
2	2 pc	Terminals
3	2 pc	Gallow pulley (For install the controller on the wall)
4	4 set	Screw (For install the controller on the wall)
5	1 pc	232 turn to RJ45 communication cable
6	1 pc	User manual
7	1 pc	Temperature sensing wire
8	2 pc	Fuse wire

□□□□□□□□□□□□□□□□□□□□□□□□□·□□□□□□□

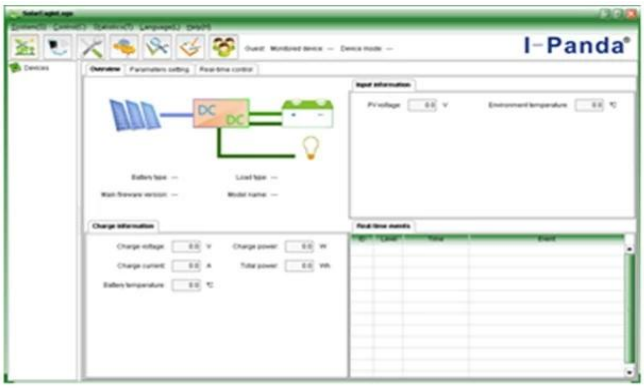

The interface of upper computer software working state

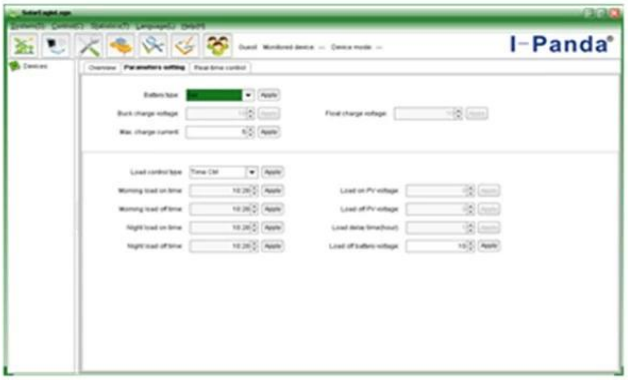

The interface of upper computer software parameter setting state

Upper computer software on/off interface and generating capacity record clean interface

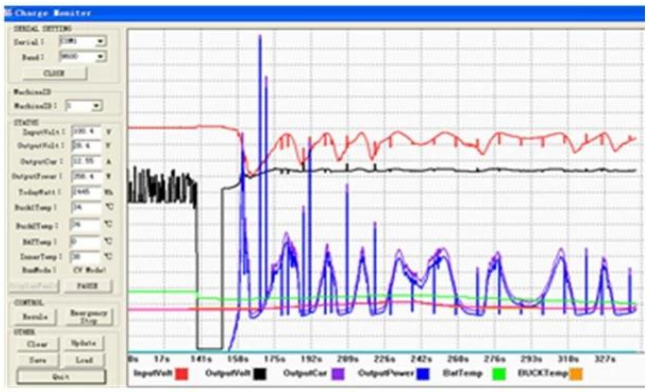

The interface of test software working state

□□□ 1□□□□□□□□□□□□□□□□□·□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

2□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□CD□□□□□□□□□□□□□□□□□□□□□□□□□□□□

3□WIN7□WIN8□□□□□□□□□□□□□□□□□□□