□□□

99□1.MPPT□□□□□□□□□□□□□□□□
2.12V/24V/48V□□□□□□□□□□□□
□□□□□□PV□□□3.Wide□□□ DC150V□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□4.Memory□□□□□□□□□□□□□□□□□□
5.Charge□□□□3□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□	12V/24V/48V SYS	□□□□□□□□□□□□□□□	
□□□□□	12V/24V/48V SYS	□□□□□□□□□ □□/□□□□□/□□□□	
□□□□□□	20A	25A	30A
□□□□□□	25A	30A	35A
□□□□	0.02□/℃±		
□□□□	14.2V-□□□ □□25℃□* 0.3		
□□□□□□□□□□□□	200mV□		
□□□□□□□□ □□	≤±1.5□		
□□□□□□□·□□□·□□□□	200mV□		
□□□□□□	≤±1.5□		
□□□□			
□□□□	□□□□□□□□□□□LAN		
□□□□□□	30A		
□□□□□□	420W	840W	1680W
□□□□	□□□□40A×2		
□□□□□□□□□□□□□	□□□□□/□□□□·□□ □□□□□□□□□□		
ON / OFF□□□	ON / OFF		
PV□□□□	□□□PV□□□□□PV□□		
PV□□/□□□□□□□	□□□□□□□□PV□□		
□□□□□□	□□□□□□□ □□□□;□□□□□□□□□□10.5□□□□□□1□□□□□□□□□□□□□□□□□		
COM□□□			
RS232□□	COM□□□□□□□□□□		
LAN□□	□□□□□□IP□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□TCP□□□□□□□□		
□□			
□□□□□□□	IN /□□□□□□□ □□		
□□□□□□□			
□□□□□□ □□			
□□□□□□□			
□□□□□ □□			
□□□□	□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□		
□□□□	95℃		
□□□□	85℃□□□□□□□□□□□□□ □□□□□□□□□□□3A□		
□□□□□□□□□			
□□□	≤40□□□□		
□□□□	□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□

□□□□	-20℃□+40℃
□□□□	-40℃□+75℃
□□	70□106kPa□□□

□□□

□□□□OEM□□□ODM service.The 36V/72V/96V□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□

Blue

Green

Upper Computer

Package

NO.	Quantity	Description
1	1 pc	Charge controller
2	2 pc	Gallow pulley (For install the controller on the wall)
3	4 set	Screw (For install the controller on the wall)
4	1 pc	232 turn to RJ45 communication cable
5	1 pc	User manual
6	1 pc	Temperature sensing wire
7	2 pc	Fuse wire

□□□□□□□□□□□□□□□□□□□□□□□□·□□□□□□□

The interface of upper computer software working state

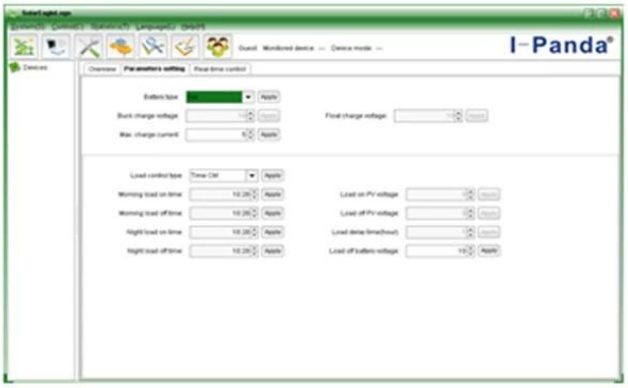

The interface of upper computer software parameter setting state

Upper computer software on/off interface and generating capacity record clean interface

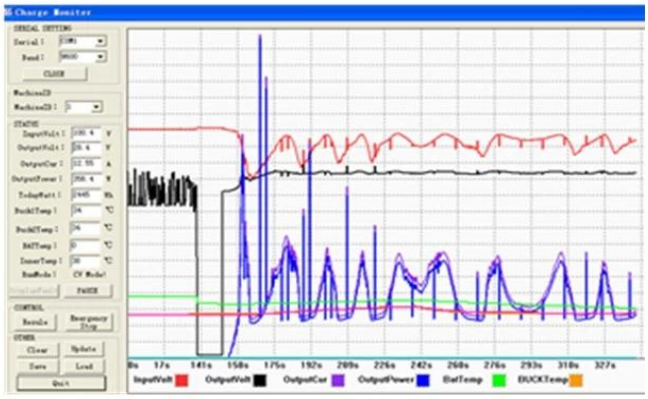

The interface of test software working state

□□□

1□□□

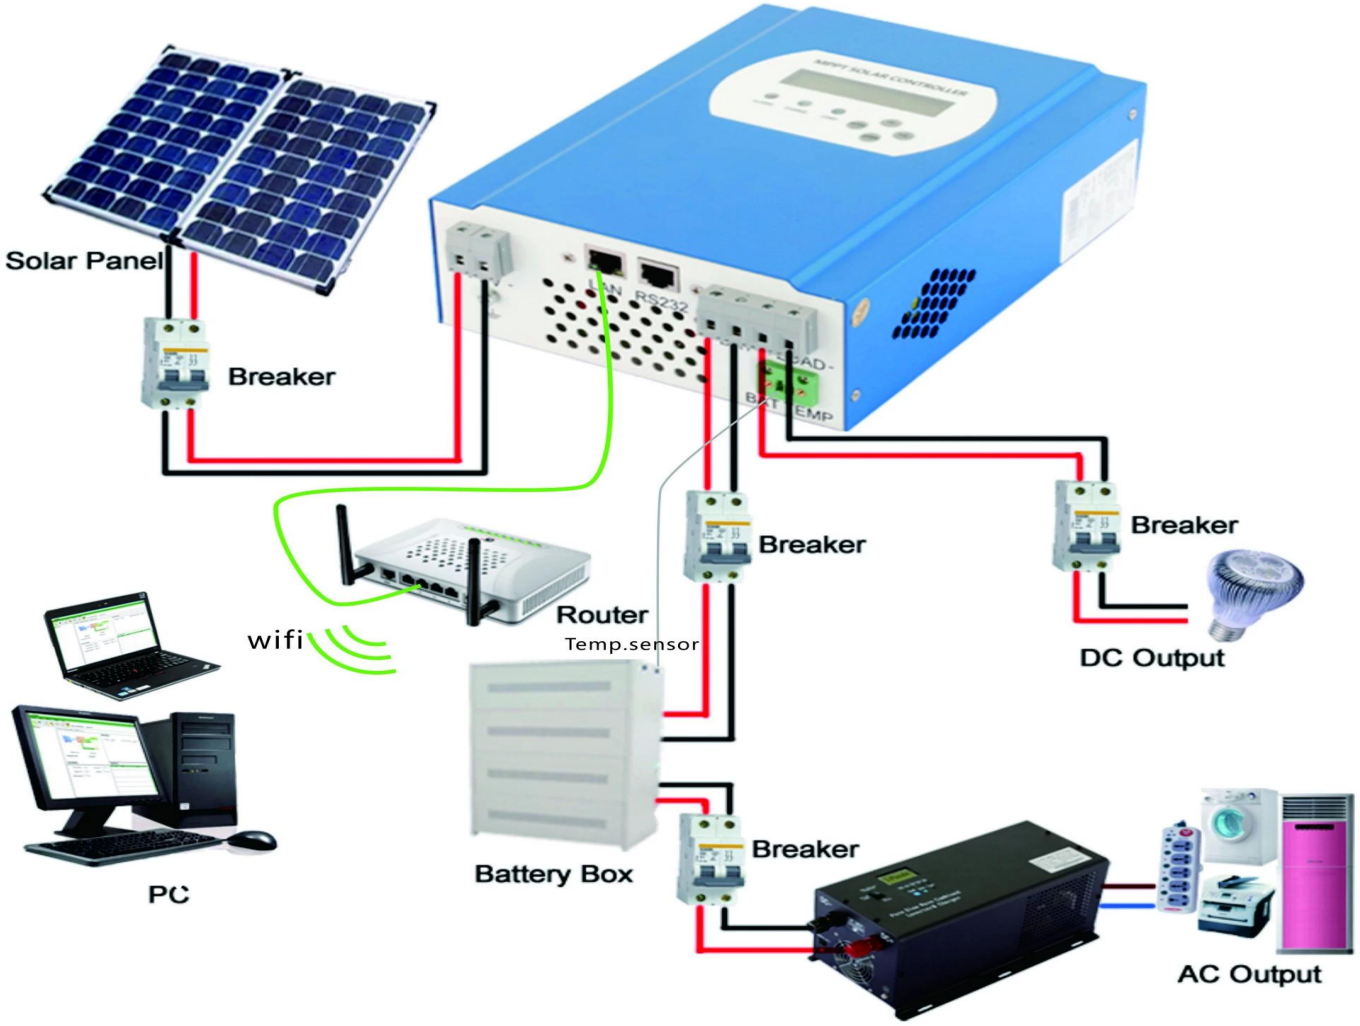
Solar Panel
Breaker
RS232
Breaker
Breaker
Router
wifi
Temp.sensor
DC Output
PC
Battery Box
Breaker
AC Output

□□□

1□□□