

WISER MPPT Solar Controller with LCD display and PC interface. It features a USB 5V 3A output and is RoHS compliant. The device is designed for efficient solar power management.
















□□

1. MPPT efficiency $\geq 99.5\%$ MPPT efficiency 98%
2. 3-year warranty
3. 4 ON / OFF PV +
- 4.
5. Seal \ Gel \ Flooded
- 6.
7. The
8. The
9. 5V 3 A USB
10. PV
11. LCD
12. RS485
13. Support PC WiFi
14. CE RoHS FCC
15. 3 10

MPPT

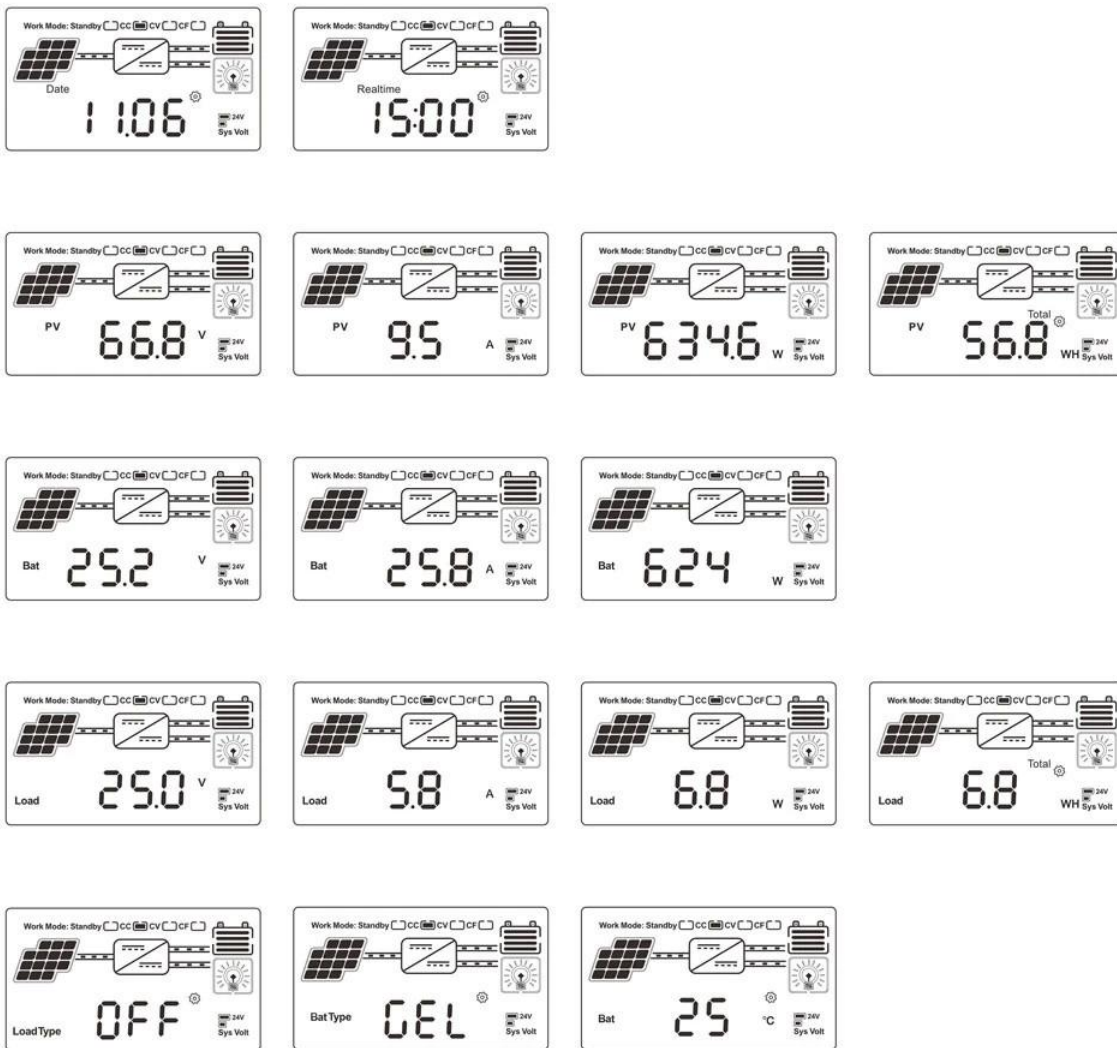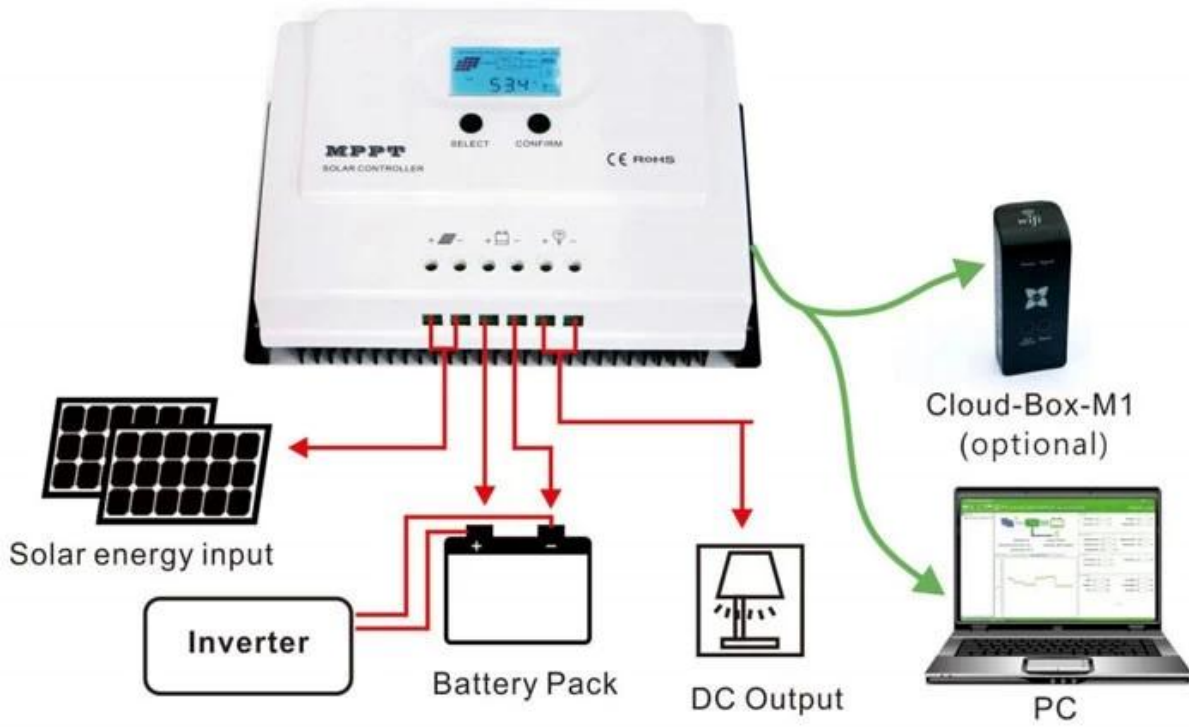


LCD

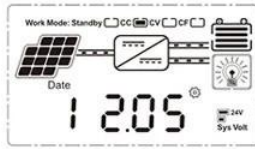

On	Mean "ON"	FLD	Mean "FLD"
OFF	Mean "OFF"	GEL	Mean "GEL"
USER	Mean "USER"	SEL	Mean "SEL"

□□□□□LOAD□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□

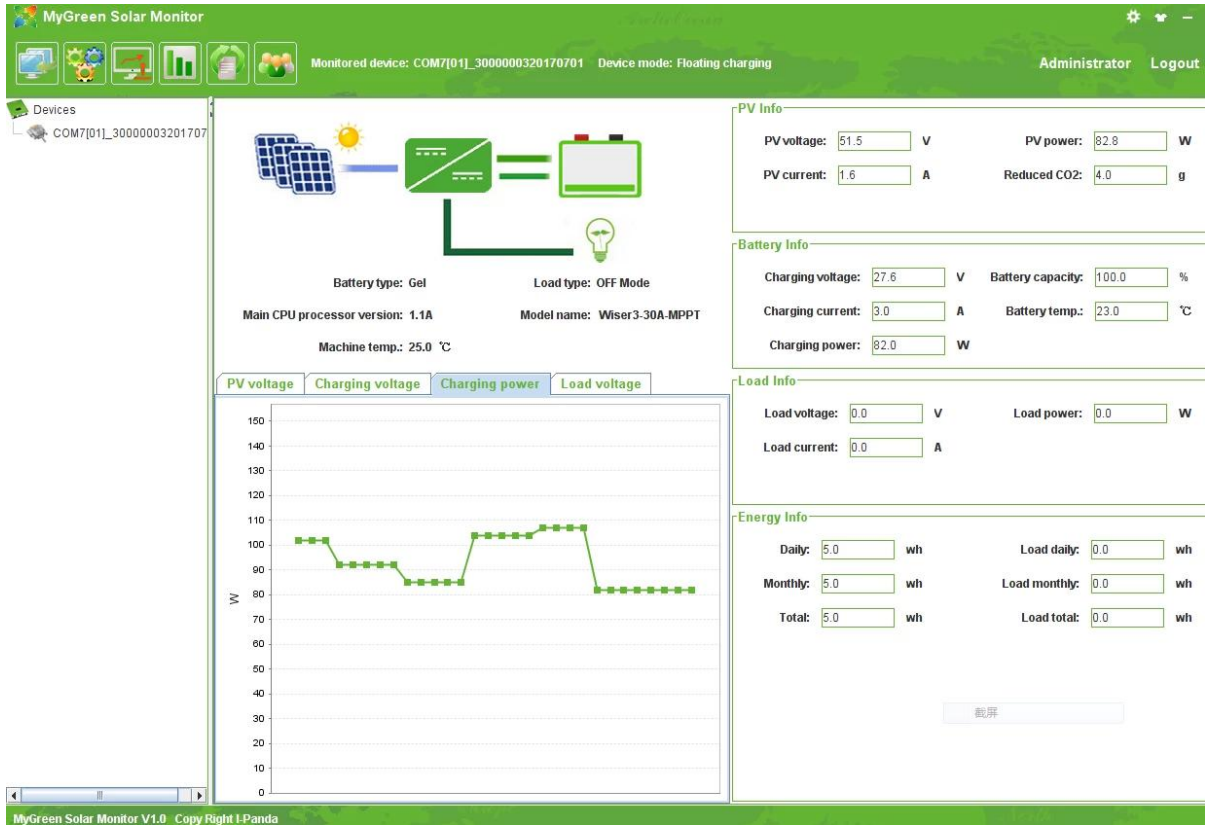

PC SolarEagle

PV LOAD

WISER

WISER		30A	
MPPT	MPPT	MPPT	
	MPPT	$\geq 99.5\%$	
	MPPT	0.5W~1.2W	
	MPPT	MPPT	
	MPPT	MPPT	
PV	PV VOC		DC150V
	MPPT		MPPT + 3V
	MPPT		MPPT + 2V
	MPPT		DC150V
	MPPT	12V	390W
	24V	780W	

規格	電圧	電圧範囲
	電流	電流範囲
	電圧	30A
	電圧	3段階電圧調整可能 - 電圧 - 電圧
LOAD	電圧	電圧範囲
	電流	50A
	電圧	On \ Off電圧PV電圧範囲 電圧範囲電圧PV +電圧範囲
電圧	電圧範囲	電圧LCD電圧範囲
電圧	電圧	8 RJ45 / RS485 / PC電圧範囲 / APP電圧範囲WiFi電圧範囲
		電圧
電圧	電圧	電圧範囲
	電圧	電圧範囲
	電圧	-20°C + 50°C
	電圧	-40°C + 75°C
	IP電圧範囲	IP43
	電圧	30mm 2
	電圧kg	1.65
	電圧	1.95
	電圧mm	243 * 155 * 80
	電圧mm	290 * 190 * 113

規格

1 電圧範囲電圧範囲電圧範囲Web電圧範囲

2 電圧72V / 96V電圧範囲MPPT電圧範囲電圧範囲OEM電圧ODM電圧範囲