

## Introduction:

This is a Maximum Power Point Tracking(MPPT) function with high efficiency MPPT charge controller. It has many advantages such as self cooling, system voltage automatic recognition, wide rang of PV input,bcharge for all kinds of batteries, intelligent discharge control, RS232 / LAN communication function etc. It is the most high-end product in solar market.



## Feature:

- 1.It has an efficient MPPT algorithm, MPPT efficiency  $\geq 99.5\%$  and converter efficiency up to 98%.
- 2.Charge mode: three stages (constant current, constant voltage, floating charge), it prolongs service life of the batteries.
- 3.Four types of load mode selection: ON/OFF, PV voltage control, Dual Time control, PV+Time control .
- 4.Battery system voltage automatic recognition.
- 5.Three kinds of commonly used lead-acid battery (Seal\Gel\Flooded) parameter settings fcan be selected by the user, and the user can also customize the parameters for other battery charging.
- 6.It has a current limiting charging function. When the power of PV is too large, the controller automatically keeps the charging power, and the charging current will not exceed the rated value.
- 7.Support multi - machine parallel to realize system power upgrade.
- 8.High definition LCD display function to check the device running data and working status, also can support modify the controller display parameter.
- 9.RS485 communication, we can offer communication protocol to convenient user's integrated management and secondary development.
- 10.Support PC software monitoring and WiFi module to realize APP cloud monitoring.
- 11.CE, RoHS, FCC certifications approved, we can assist clients to pass various certifications.
- 12.3 years warranty, and 3~10 years extended warranty service also can be provided.

## Parameter

MASTER series		48BL-80A	48BH-80A
Product category	Controller Properties	MPPT (maximum power point tracking)	
	MPPT efficiency	$\geq 99.5\%$	
	Standby power	0.5W~1.2W	
	System voltage	Automatic recognition	48V
	Heat-dissipating method	Air cooling	


Input Characteristics	Max.PV input voltage(VOC)	DC150V	DC300V	
	Start the charge voltage point	Battery voltage + 3V	Battery voltage + 10V	
	Low input voltage protection point	Battery voltage + 2V	Battery voltage + 5V	
	Over voltage protection point	DC150V	DC300V	
	Rated PV power	12V system	1040W	□
		24V system	2080W	□
36V system		3120W	□	
48V system		4160W	4160W	
96V system		□	□	
Charge Characteristics	Selectable Battery Types(Default Gel battery)	Sealed lead acid, Gel battery, Flooded (Other types of the batteries also can be defined)		
	Charge rated current	80A	80A	
	Charging Method	3-Stage: constant current(fast charging)-constant voltage-floating charge		
LOAD Characteristics	Load voltage	The same as the battery voltage		
	Load rated current	80A	80A	
	Load control mode	On\Off mode, PV voltage control mode, Dual-time control mode, PV + Time control mode		
Display & Communication	Display mode	High-definition LCD segment code backlight display		
	Communication mode	8-pin RJ45 port/RS485/support PC software monitoring/support WiFi module to realize APP cloud monitoring		
Other Parameters	Protect function	Input-output over \ under voltage protection,Prevention of connection reverse protection,battery shedding protection etc.		
	Operation Temperature	-20°C~+50°C		
	Storage Temperature	-40°C~+75°C		
	IP(Ingress protection)	IP43		
	Max. connection size	50mm <sup>2</sup>		
	Net Weight (kg)	7.1		
	Gross Weight (kg)	8.8		
	Product Size[mm]	420*280*95		
Packing Size(mm)	510*368*210			


Remark:Above is company's standard parameters;

## Product Parts:

NO.	Quantity	Description
1	1PC	MPPT Solar controller [Blue, Green or White]
2	2 pc	hangers (To install the controller on the wall )
3	8 set	Screw (To keep the hangers into the controller )
4	1 pc	RJ45 turn to RS232 communication cable
5	1 pc	Temperature sensing wire
6	1 pc	CD
7	1 pc	User manual

## The Main Information of MPPT

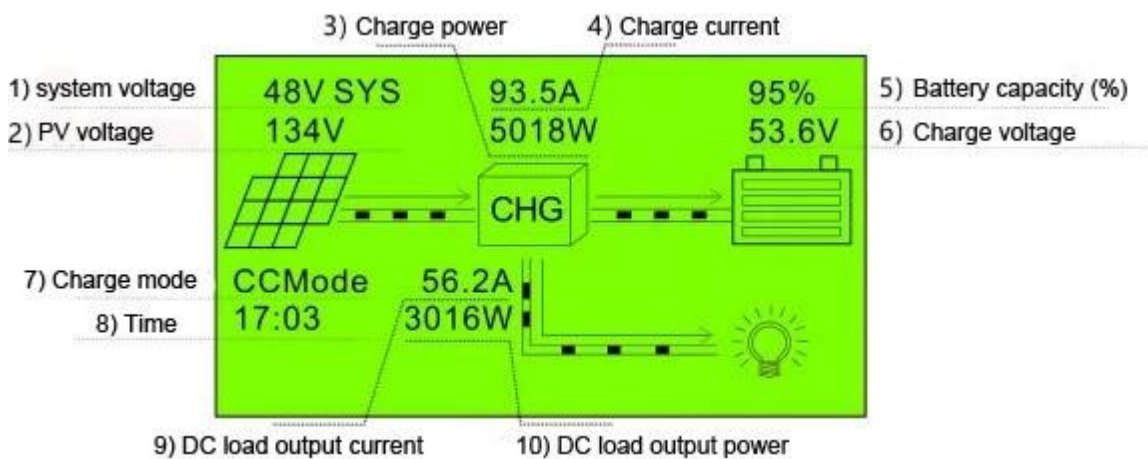


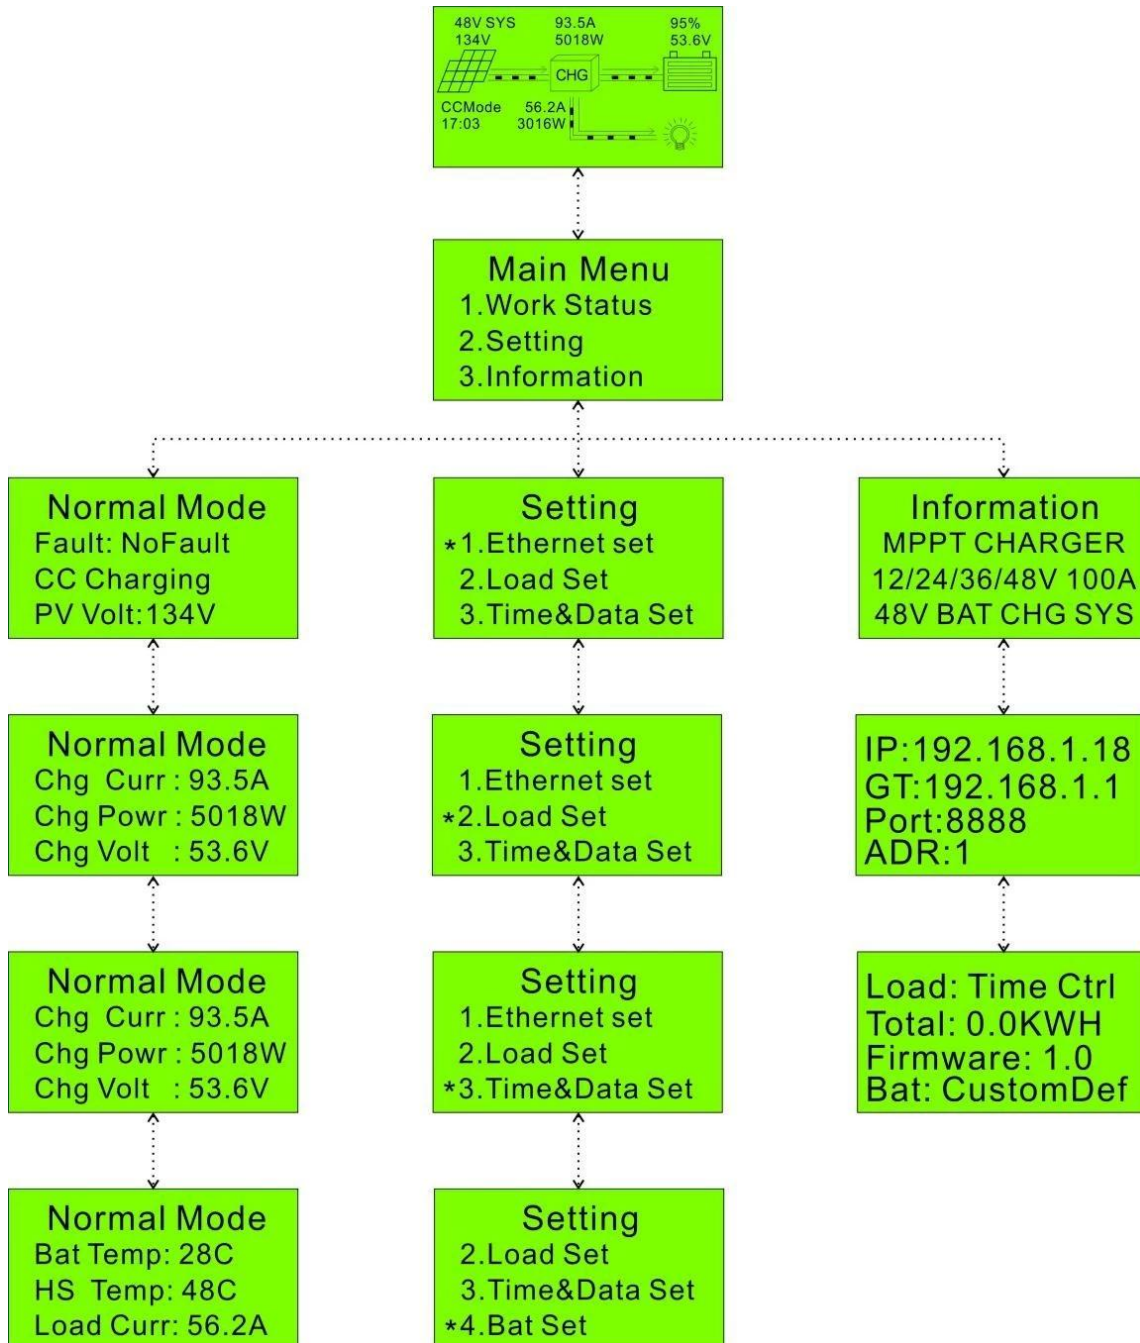

## Setting page


Note: All above information is asample which is the working state of MASTER in some time . In differentworking stage the parameters will change, like working mode , charge current,charge mode ,charge power and so on ; In the fault mode it will show faultmode ;

## Upper Computer Software and Test Software

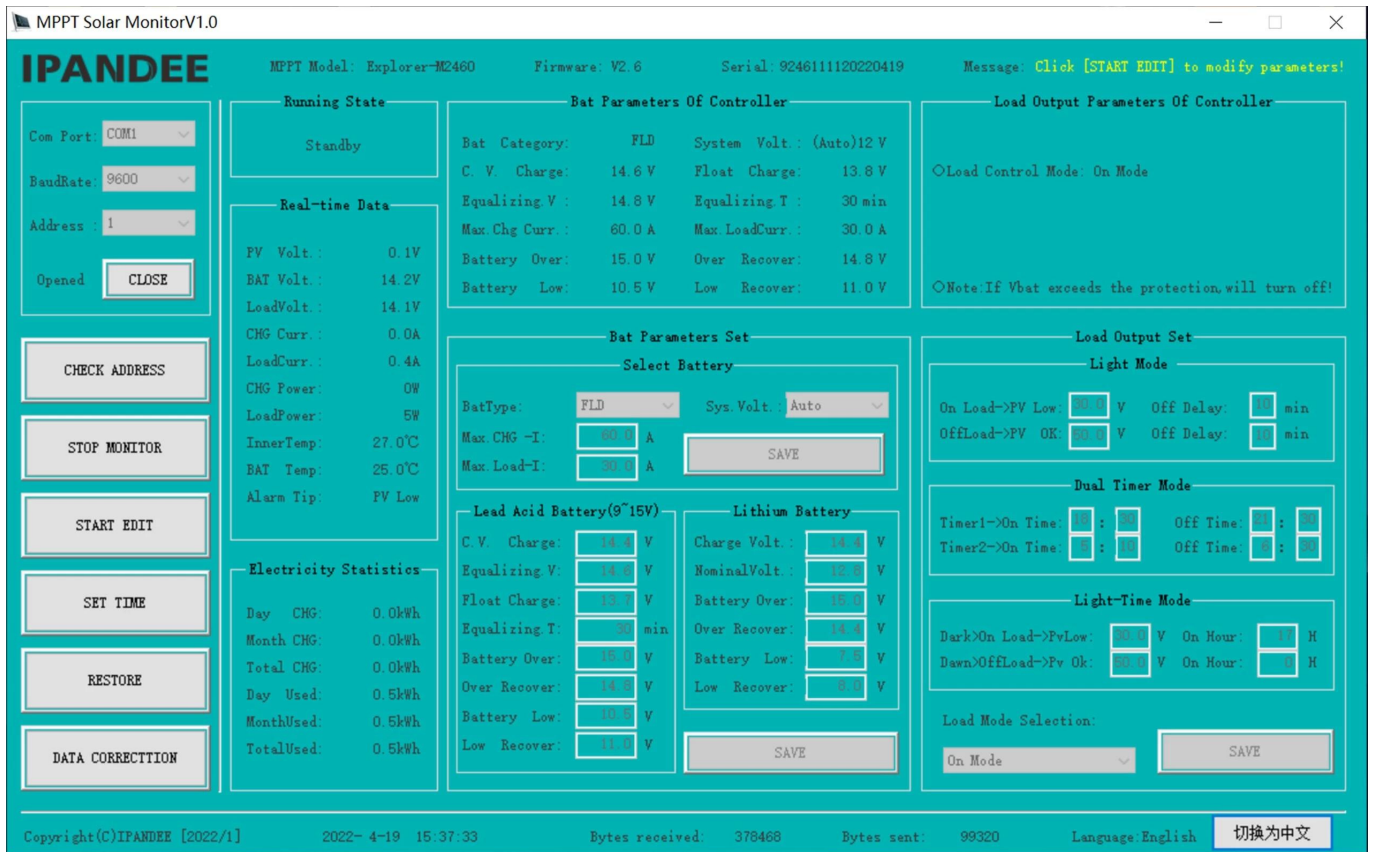

The interface of upper computer software working state

## Systemaansluitschema

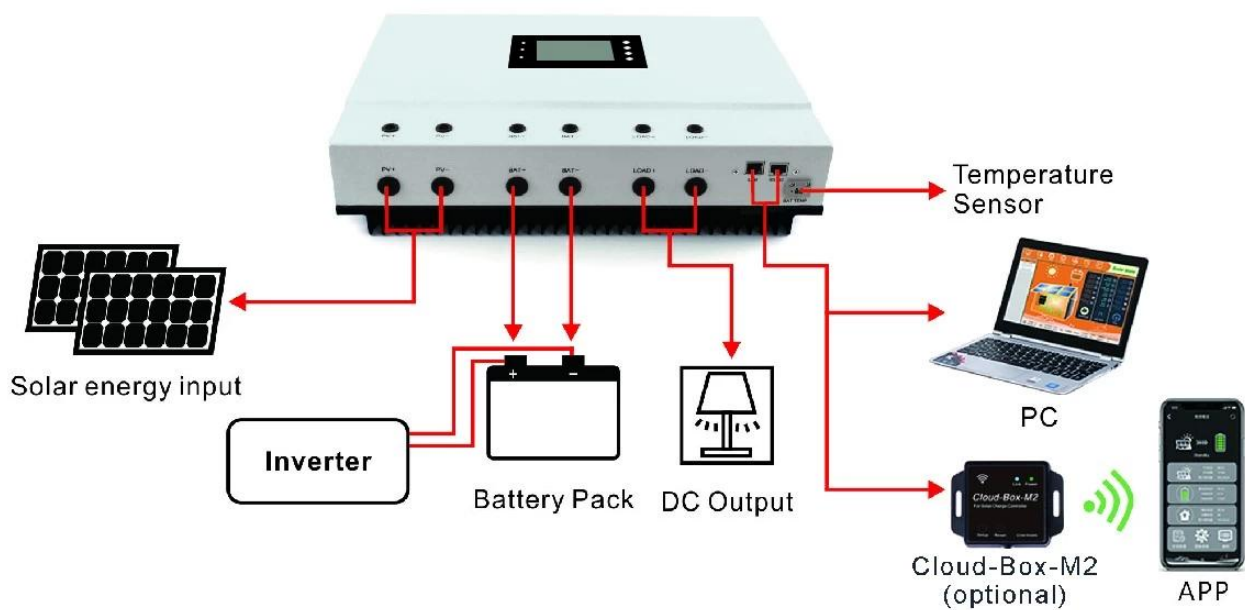

## Parallel verbindungschema

