





MPPT 99

1.MPPT 99

2.12V / 24V / 48V

3.Wide PV DC150V.

4.Unlimited

5.Journal

6.Charge: ()

7.Discharge: ON / OFF

8.Recommended:

9.Most LCD

10.RS232 LAN IP area.And

..... .

11.The 11

12.With

13.Adopting 105 °C.

14.Compliance 2002/95 / EC

15Equipment: + CD-ROM (..... + + +).

16CE ROHS

.....:

.....: LP-SMART2-40A / 50A / 60A -series		40A	50A	60A
.....	3			
.....	DC12V / 24V / 48V		
.....	12	DC9V ~ DC15V		
	24	DC18V ~ DC30V		
	48Vsystem	DC36V ~ DC60V		
.....	12V / 24V / 48Vsystem	≤10S		
.....	12V / 24V / 48Vsystem	500us		
.....	12V / 24V / 48Vsystem	≥96.5% ≤99%		
PV	12V / 24V / 48Vsystem	≥99%		
.....				
MPPT	12	DC18V ~ DC150V		
	24	DC34 ~ DC150V		
	48	DC65 ~ DC150V		
.....	12	DC16V		
	24	DC30V		
	48	DC60V		
.....	12	DC22V		
	24	DC34V		
	48	DC65V		
..... DC	12V / 24V / 48V	DC160V		
.....	12V / 24V / 48V	DC150		
.....	12V / 24V / 48V	DC145V		
..... PV	12	570W	700W	900W
	24	1130W	1400W	1700W
	48	2270W	2800W	3400W
.....				
..... GEL	12V / 24V / 48V		
.....	12V / 24V / 48V		
.....	12V / 24V / 48V		
.....	12	14.6V		
	24	29.2V		
	48	58.4V		
.....	12V / 24V / 48V	40A	50A	60A
	12V / 24V / 48V	44A	55A	66A

電源電圧 (V)	12V / 24V / 48V	40A	50A	60A
電源電圧変動係数 (%)	± 0.02%	°C		
電源電圧変動係数 (100%)	14.2V- (0.3 * (°C 25 - 電源電圧変動係数))			
電源電圧変動係数 (100%)	200mV			
電源電圧変動係数 (100%)	≤ ± 1.5%			
電源電圧変動係数 (100%)	200mV			
電源電圧変動係数 (100%)	≤ ± 1.5%			
LAN 接続				
電源電圧 (V)	12V / 24V / 48V	LAN		
電源電圧変動係数 (%)	± 0.02%	40A		
電源電圧変動係数 (100%)	30mA * 2			
電源電圧変動係数 (100%)	ON / OFF	ON / OFF		
PV 接続	PV 接続	PV 接続		
PV 接続 / 電源電圧変動係数 (100%)	1 電源電圧変動係数 (10.5) 電源電圧変動係数 (100%)			
RS232 接続				
RS232 接続	COM			
LAN 接続	IP	TCP		
動作環境				
動作電圧 (V)	95 °C			
動作電圧 (V)	3 電源電圧変動係数 (10.5) 電源電圧変動係数 (100%)			
音圧				
音圧	≤40dB			
音圧変動係数 (%)	音圧変動係数 (100%)			
音圧変動係数 (100%)	105 電源電圧変動係数 (100%)			
音圧変動係数 (100%)	電源電圧変動係数 (100%)			
音圧変動係数 (100%)	電源電圧変動係数 (100%)			
外形寸法				
外形寸法 (mm)	270 * 185 * 90			
N.G (mm)	3			
G.N (mm)	3.6			
電源電圧 (V)	CE PSE FCC			
EMC	EN61000			
電源電圧変動係数 (100%)	IP21			
動作環境				
動作電圧 (V)	0 ~ 90% RH (電源電圧変動係数)			
動作電圧 (V)	0 ~ 3000M			
動作電圧 (V)	-20 °C ~ + 40 °C			
動作電圧 (V)	-40 °C ~ + 75 °C			
動作電圧 (V)	70 ~ 106kpa			



Blue



Green




Upper Computer




Package

العلوي برامج الكمبيوتر واختبار البرمجيات

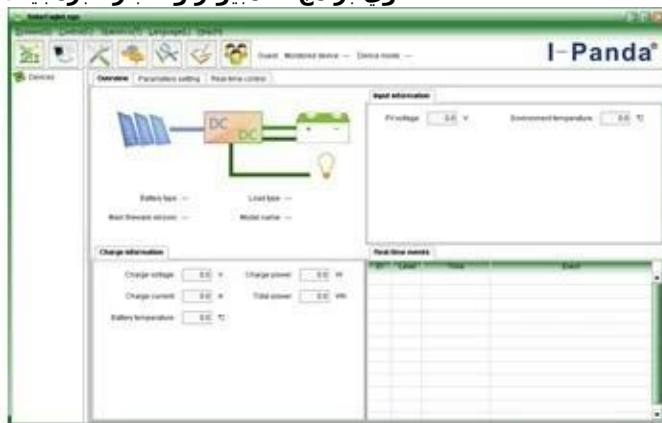


The interface of upper computer software working state

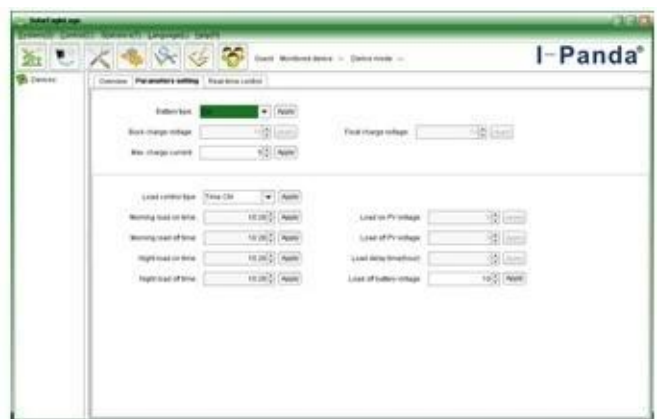

The interface of upper computer software parameter setting state



Upper computer software on/off interface and generating capacity record clean interface

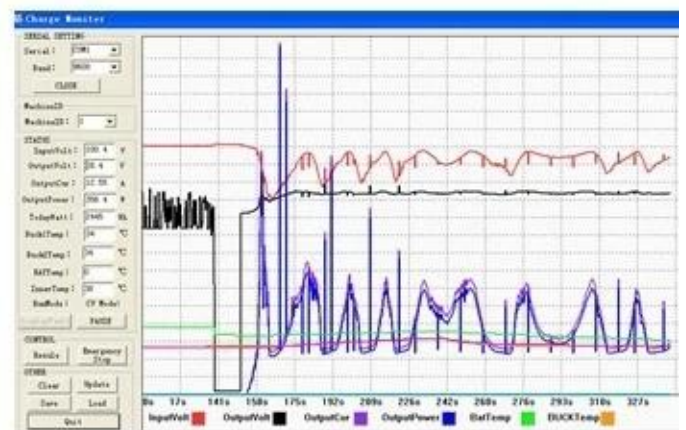

The interface of test software working state

اتصال MPPT



الشهادات

[ISO2008](#)

[ISO2004](#)

[CE](#)

[FCC](#)

[ROHS](#)

شركة





