



□□□

□□□-P-MS-C-DC96V□□		20A	30A
□□□□	□□□□□□		
□□	3□□□□□□□□□□MPPT□□□□□□□□		
□□□□	DC12V / 24V / 48V / 96V	□□□□	
	12V□□	DC9V□DC15V	
	24V□□	DC18V□DC30V	
□□□□	48V□□	DC36V□DC60V	
	96V□□	DC72V□DC120V	
□□□□□	12V / 24V / 48V / 96V	≤10S	
□□□□□□□□	12V / 24V / 48V / 96V	500US	
□□□□	12V / 24V / 48V / 96V	≥96.5□□≤99□	
□□□□□□□□	12V / 24V / 48V / 96V	≥99□	
□□□□			
	12V□□	DC18V□DC150V	
MPPT□□□□□□□□	24V□□	DC34□DC150V	
	48V□□	DC65□DC150V	
	96V□□	DC125□DC300V	
	12V□□	DC16V	
	24V□□	DC30V	
□□□□□□□□	48V□□	DC60V	
	96V□□	DC120V	

□□□□	-40°C□+ 75°C
□□	70□106kPa

□□□□□□□□□□□□□□□□□□
 □□□□OEM□ODM□□□□□36V / 72V / 96V□□□□□□□□□□□□

□□□



□□PC□□□□□□□□□□

SolarEagle
 System(S) Control(C) Statistics(T) Language(L) Help(H)
 Guest Monitored device: COM1[01]_1234567890123456 Device mode: Constant voltage charging **I-Panda®**

Devices
 COM1[01]_1234567890123456

Overview Parameters setting Real-time control

Input information
 PV voltage: 105.1 V Environment temperature: 38.0 °C


Battery type: Gel Model name: IPANDA-MPPT-60A
 Main firmware version: 1.0

Output information
 Output voltage: 27.1 V Output power: 0.0 W
 Output current: 0.0 A Total power: 3.9 kWh
 Battery temperature: 0.0 °C

Real-time events

ID	Level	Time	Event
3001	Messa...	2011-11-05 15:20:...	Communication restore
3002	Messa...	2011-11-05 15:20:...	Communication lost
3001	Messa...	2011-11-05 15:20:...	Communication restore

□□PC° Firmware

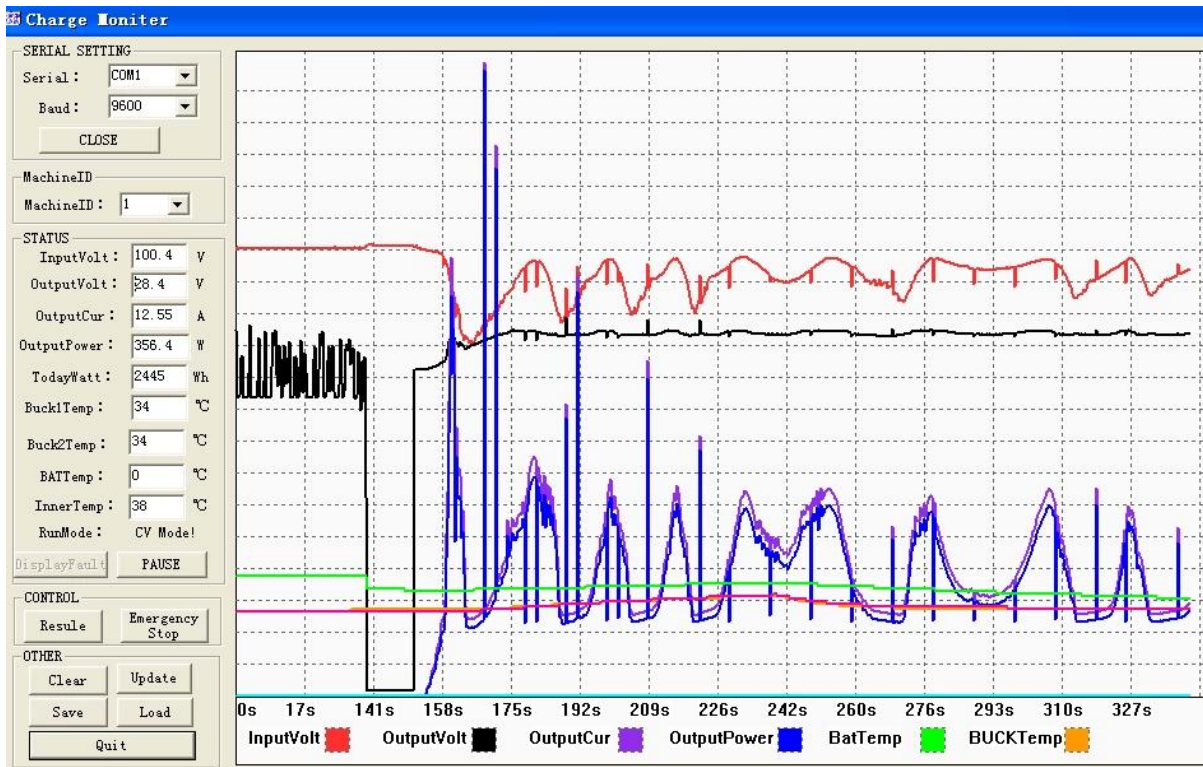

□□□□□□

□□

1. □□□□□□□□□□□□□□□□□□□□□□
2. □□□□□□□□□□□□□□□□□□□□
3. □□□□
4. □□□□□□

□□□□□□□□ MPPT□□□□□□□□□□ Smart1 48V 40A-60A

□□





