

WISER MPPT LCD PC MPPT USB 5V 3A mppt



- 1. MPPT ≥ 99.5
 - 2.
 - 3. ON / OFF PV +
 - 4.
 - 5. Seal \ Gel \ Flooded
 - 6.
 - 7.
 - 8.
 - 9. 5V3A USB
 - 10. PV
 - 11. LCD
 - 12. RS485
 - 13. PC WiFi APP
 - 14. CE RoHS FCC
- 3 10
MPPT




温度传感线



















螺丝刀





















RS485 USB通讯线
(选配)

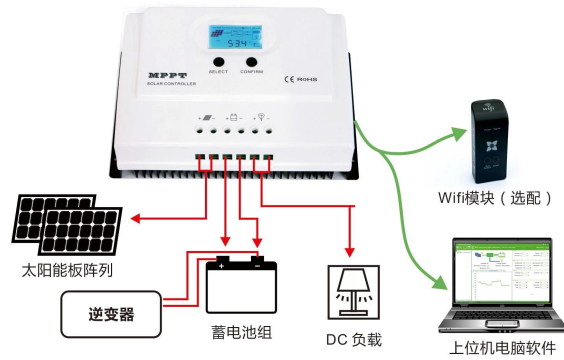

□□□□&□□□□




LCD□□□□

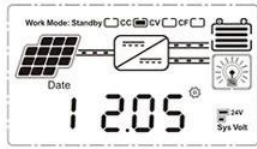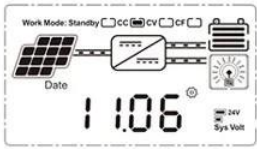

On	Mean "ON"	FLD	Mean "FLD"
OFF	Mean "OFF"	GEL	Mean "GEL"
USER	Mean "USER"	SEL	Mean "SEL"

LOAD

LOAD

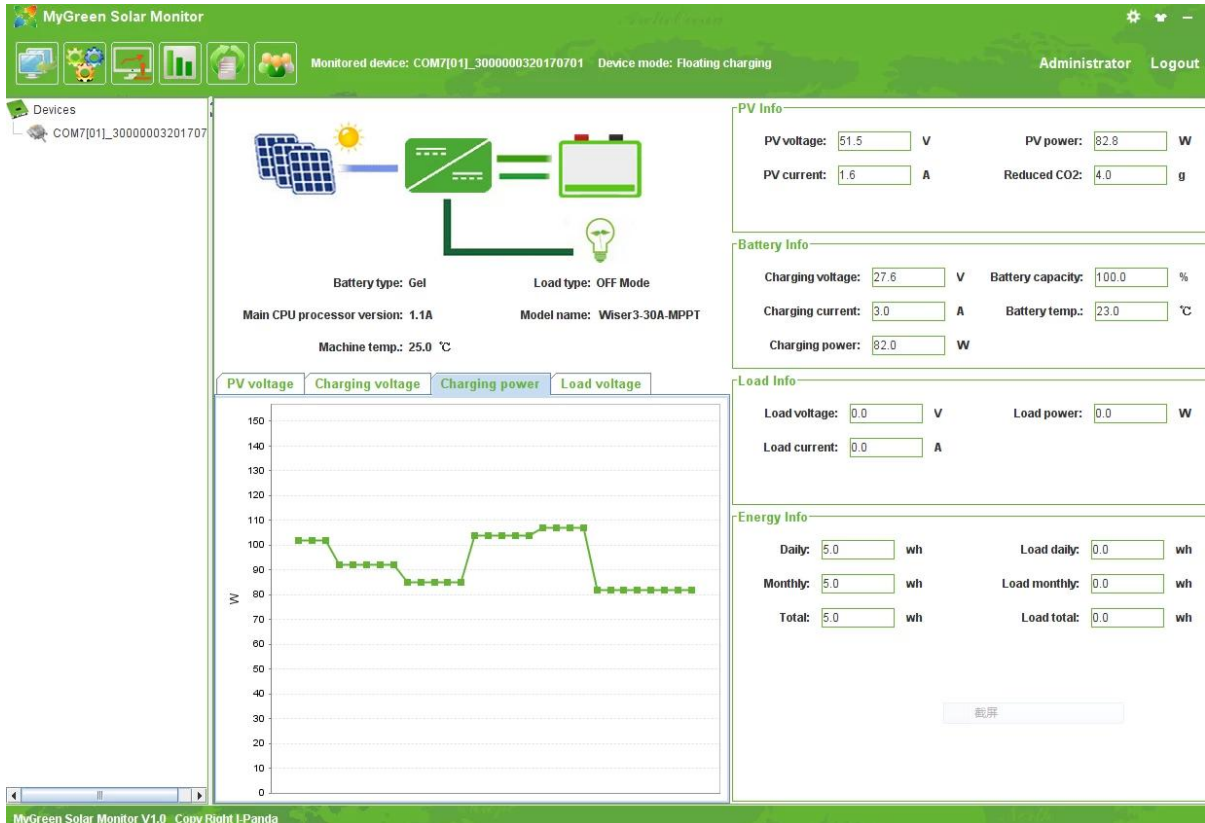

MyGreen Solar Monitor V1.0 Copy Right I-Panda

PC_SolarEagle

PVLOAD;

□□

WISER		40A
□□□□	□□□□	MPPT□□□□□□□□
	MPPT□□	≥99.5□
	□□□□	0.5W□1.2W
	□□□□	□□□□
	□□□□	□□□□□□
□□		
□□	□□□□□□□□VOC□	DC150V
	□□□□□□□□	□□□□+ 3V
	□□□□□□□□	□□□□+ 2V
	□□□□□□	DC150V
	□□□□□□	520W
	12V□□	1040W
	24V□□	

参数	额定电压	12V/24V/36V/48V/60V/72V/96V
	额定电流	40A
	额定功率	3000W (12V) - 3600W (96V)
	效率	> 90%
通信	通信接口	RS485
	通信速率	50A
	通信协议	Modbus RTU / PV / PV + 自定义
显示	显示类型	LCD 液晶屏
	显示内容	8 RJ45 / RS485 / PC / APP / WiFi / APP
	显示语言	中文 / 英文 / 自定义
其他	工作温度	-20°C ~ +50°C
	存储温度	-40°C ~ +75°C
	防护等级	IP43
	使用寿命	30000h
	纹波系数	1.65%
	重量	1.95kg
	尺寸 (mm)	243 * 155 * 80
	尺寸 (mm)	290 * 190 * 113

注:

1. 所有参数均符合国家标准及行业规范;

2. 所有产品均支持 72V / 96V MPPT 输入, OEM / ODM 定制。