

11

| 仕様   |               |     | 48BL-100A  |
|------|---------------|-----|------------|
| 基本仕様 | 充電方式          |     | MPPT充電制御方式 |
|      | MPPT効率        |     | ≥99.5%     |
|      | 充電電圧          |     | 0.5W～1.2W  |
|      | 充電電流          |     | 100mA      |
|      | 充電電圧          |     | 100mA      |
| 充電仕様 | Max.PV充電電圧VOC |     | DC150V     |
|      | 充電電圧          |     | 充電電圧 + 3V  |
|      | 充電電圧          |     | 充電電圧 + 2V  |
|      | 充電電圧          |     | DC150V     |
|      | 充電電圧          | 12V | 1300W      |
|      |               | 24V | 2600W      |
|      |               | 36V | 3900W      |

|      |        |                            |
|------|--------|----------------------------|
| 規格   | 標準仕様   | 標準仕様                       |
|      | 標準仕様   | 100a                       |
|      | 標準仕様   | 標準仕様 - 標準仕様                |
| 仕様   | 標準仕様   | 標準仕様                       |
|      | 標準仕様   | 100a                       |
|      | 標準仕様   | 標準仕様PV + 標準仕様              |
| 標準仕様 | 標準仕様   | 標準仕様LCD                    |
|      | 標準仕様   | 8 RJ45 / RS485 / PC / WiFi |
| 標準仕様 | 標準仕様   | 標準仕様 \\ \ 標準仕様             |
|      | 標準仕様   | -20°C + 50°C               |
|      | 標準仕様   | -40°C + 75°C               |
|      | IP     | IP43                       |
|      | 標準仕様   | 50mm2                      |
|      | 標準仕様   | 7.1                        |
|      | 標準仕様kg | 8.8                        |
|      | 標準仕様mm | 420*280*95                 |
|      | 標準仕様mm | 510*368*210                |

標準仕様  
標準仕様標準仕様標準仕様 標準仕様 標準仕様 標準仕様標準仕様標準仕様 標準仕様ing 標準仕様標準仕様標準仕様標準仕様標準仕様標準仕様

標準仕様TER標準仕様w

MPPT Solar MonitorV1.0

IPANDEE

MPPT Model: Explorer-M2460

Firmware: V2.6

Serial: 9246111120220419

Message: Click [START EDIT] to modify parameters!

Com Port: COM1  
BaudRate: 9600  
Address: 1  
Opened  
CHECK ADDRESS  
STOP MONITOR  
START EDIT  
SET TIME  
RESTORE  
DATA CORRECTION

Running State

Standby

Real-time Data

PV Volt: 0.1V  
BAT Volt: 14.2V  
LoadVolt: 14.1V  
CHG Curr: 0.0A  
LoadCurr: 0.4A  
CHG Power: 0W  
LoadPower: 5W  
InnerTemp: 27.0°C  
BAT Temp: 25.0°C  
Alarm Tip: PV Low

Electricity Statistics

Day CHG: 0.0kWh  
Month CHG: 0.0kWh  
Total CHG: 0.0kWh  
Day Used: 0.5kWh  
MonthUsed: 0.5kWh  
TotalUsed: 0.5kWh

Bat Parameters Of Controller

Bat Category: FLD System Volt: (Auto)12 V  
C.V. Charge: 14.6 V Float Charge: 13.8 V  
Equalizing V: 14.8 V Equalizing T: 30 min  
Max Chg Curr: 60.0 A Max LoadCurr: 30.0 A  
Battery Over: 15.0 V Over Recover: 14.8 V  
Battery Low: 10.5 V Low Recover: 11.0 V

Bat Parameters Set

Select Battery

BatType: FLD Sys. Volt: Auto  
Max CHG ~I: 60.0 A  
Max Load~I: 30.0 A  
SAVE

Lead Acid Battery(9~15V)

C.V. Charge: 14.6 V  
Equalizing V: 14.8 V  
Float Charge: 13.8 V  
Equalizing T: 30 min  
Battery Over: 15.0 V  
Over Recover: 14.8 V  
Battery Low: 10.5 V  
Low Recover: 11.0 V  
SAVE

Lithium Battery

Charge Volt: 14.4 V  
Nominal Volt: 12.8 V  
Battery Over: 15.0 V  
Over Recover: 14.4 V  
Battery Low: 7.6 V  
Low Recover: 8.0 V  
SAVE

Load Output Parameters Of Controller

Load Control Mode: On Mode  
Note: If Vbat exceeds the protection, will turn off!

Load Output Set

Light Mode

On Load->PV Low: 30.0 V Off Delay: 10 min  
OffLoad->PV OK: 30.0 V Off Delay: 10 min

Dual Timer Mode

Timer1->On Time: 10 : 30 Off Time: 21 : 30  
Timer2->On Time: : Off Time: :

Light-Time Mode


Dark>On Load->PvLow: 30.0 V On Hour: 1 H  
Dawn>OffLoad->Pv Ok: 30.0 V On Hour: 0 H

Load Mode Selection:  
On Mode  
SAVE


Copyright(C)IPANDEE [2022/1] 2022- 4-19 15:37:33 Bytes received: 378468 Bytes sent: 99320 Language: English 切换为中文



□□□□

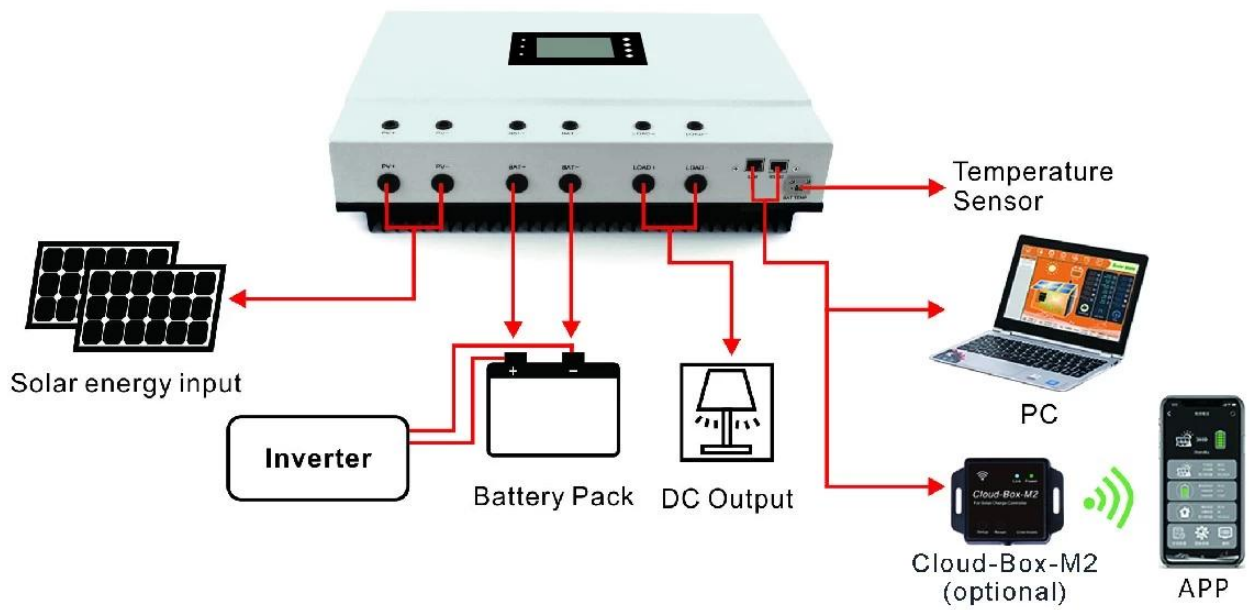

□□□□□

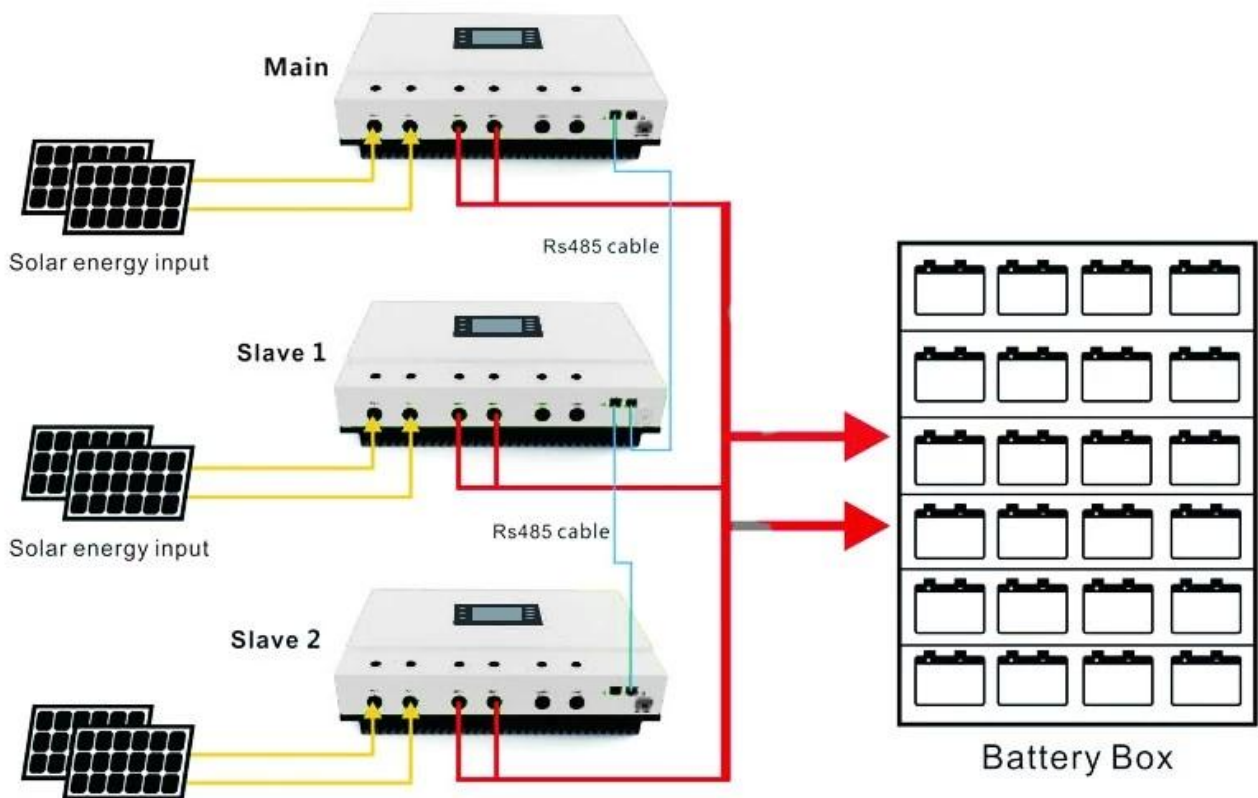

MPPT 10 2016 SNEC Fair 10top



□□□□□□□□□□

□□

Skype @wipanda.com

**WhatsApp/☎☎☎ 0086 15915353570**