







[illegible]

1. 
2. 
3. 
4. 
5. 
6. 


1. 1930-1960 年期间
2. 1995-1999 年期间
3. 1930 年期间
2. 1995-1999 年期间
4. 1930 年期间
3. 1930 年期间
4. 1930 年期间

- 1.MPPT99
- 2.12V / 24V / 48V12V / 24V / 48V
- 3.WideDC150V
- 4.Memory128KB
- 5.Charge3.IT10000mAh
- 6.Discharge/ OFFPV+ ON
- 7.SelectedNiCd
- 8.MostLCDLEDPV
- 9.RS232LAN IParea.And10000mAh
- 10.11
- 11.With10000mAh

PV	PV
	10.51
COM	
RS232	COM
LAN	IPTCP
	95℃
	85℃3A
	≤40dB
	EU105℃substances.All2002/95 / EC
PHYSICAL	
DxWxH	270 * 185 * 90
N.G	2.1
G.N	2.4
	CERoHSPSEFCC
EMC	EN61000
	IP21
	090RH
	03000
	-20℃+ 40℃
	-40℃+ 75℃
	70106kPa



□ □

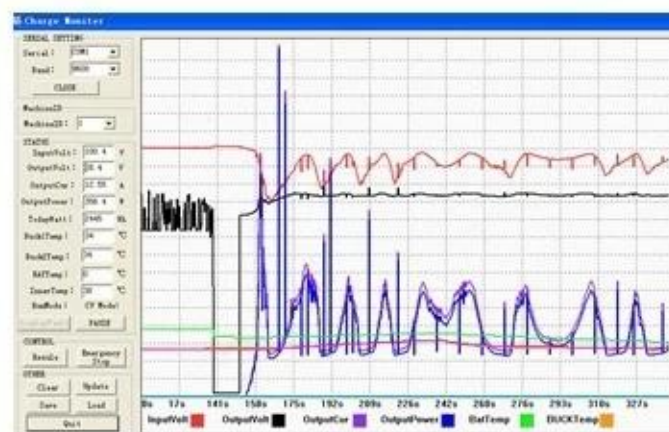

MPPT□□

3.2 7-15

3.3 25

4.

EMS DHL