





# PC


SolarEagle

System(S) Control(C) Statistics(T) Language(L) Help(H)

Guest Monitored device: COM1[01\_1234567890123456] Device mode: Constant voltage charging **I-Panda®**

Devices  
COM1[01\_1234567890123456]

**Overview** Parameters setting Real-time control



Battery type: Gel Model name: IPANDA-MPPT-60A  
Main firmware version: 1.0

**Input information**

PV voltage: 105.1 V Environment temperature: 38.0 °C


**Output information**

Output voltage: 27.1 V Output power: 0.0 W  
Output current: 0.0 A Total power: 3.9 kWh  
Battery temperature: 0.0 °C

**Real-time events**

ID	Level	Time	Event
3001	Messa...	2011-11-05 15:20:...	Communication restore
3002	Messa...	2011-11-05 15:20:...	Communication lost
3001	Messa...	2011-11-05 15:20:...	Communication restore

PC Firmware

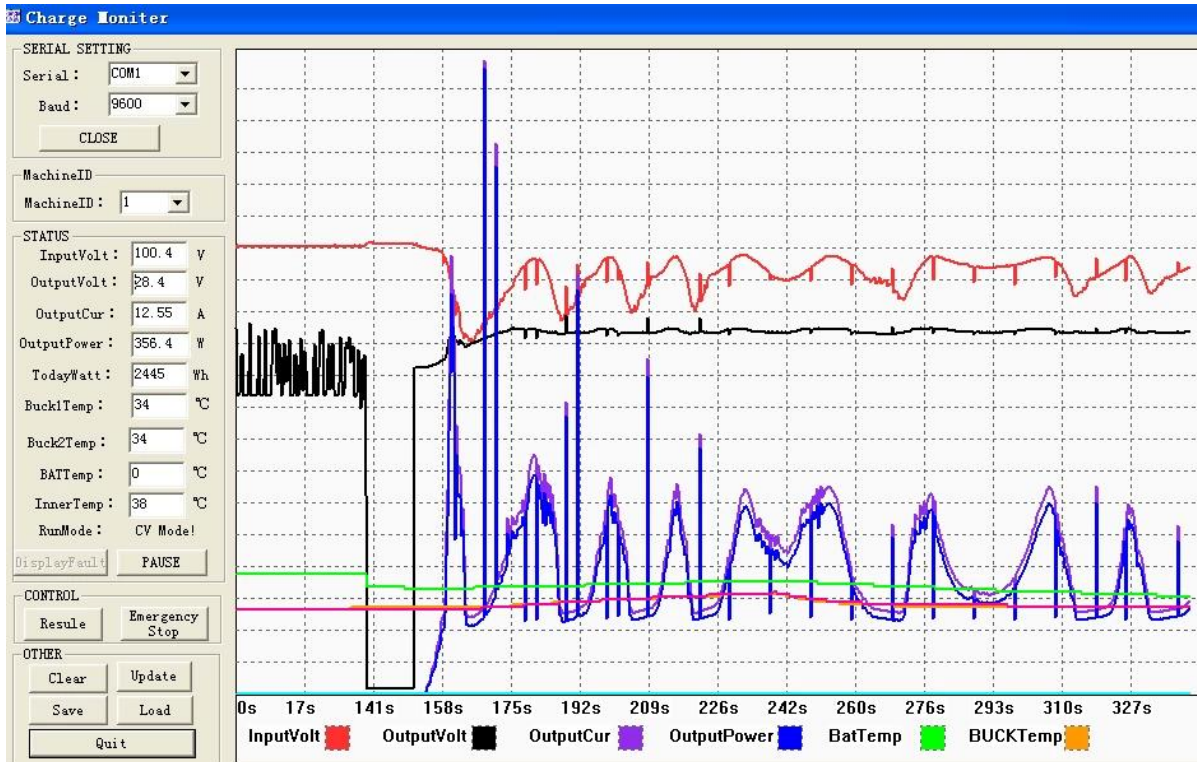

□□□□□□□□□□

I-□□□□□□□□□□ MPPT□□□□□□□□□□□□□□□□ Smart1 48V 40A□60A

□□□















□□□□□□



中外运敦豪