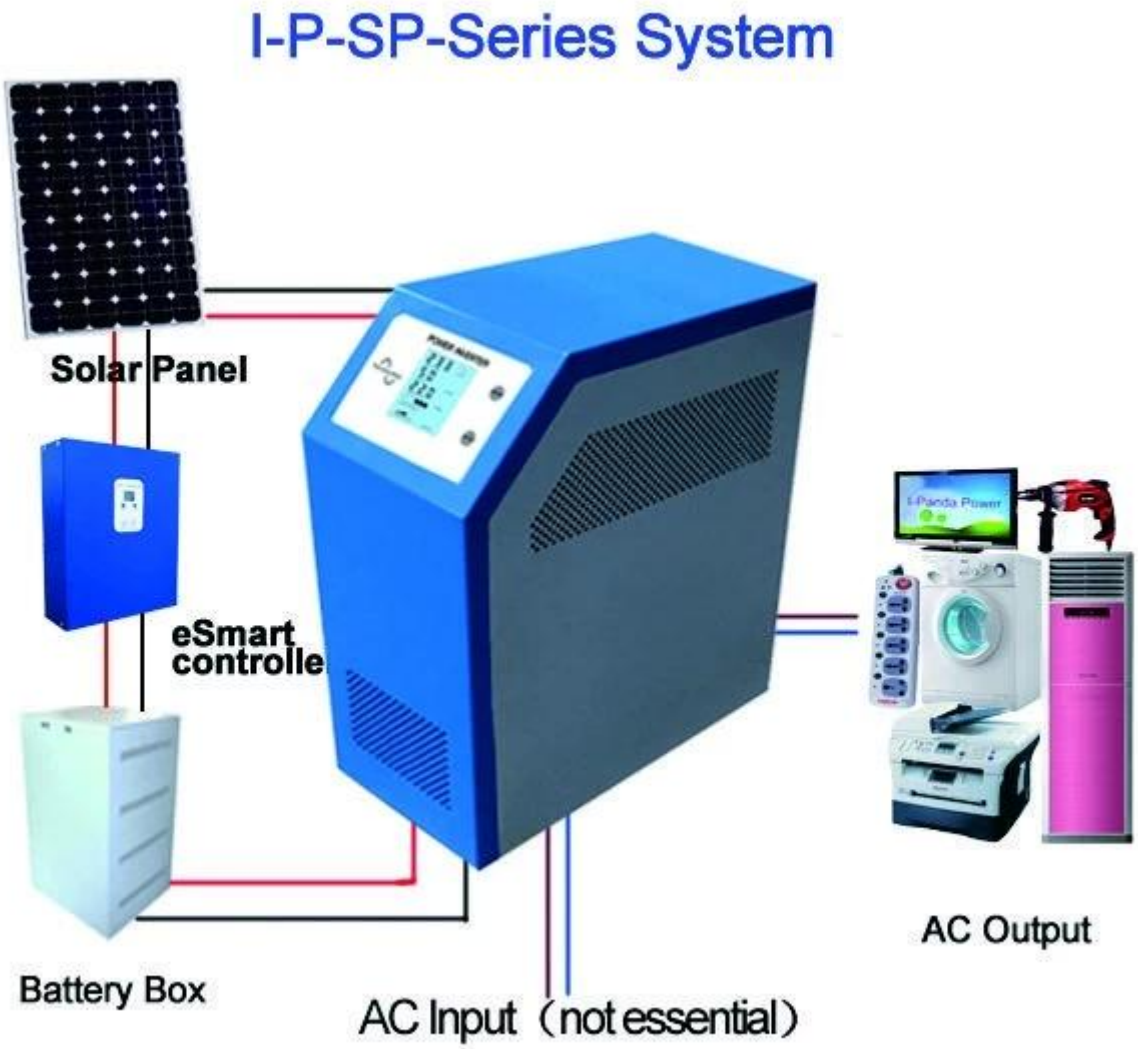

接続図

アプリケーション

工業用、商業用、家庭用などのために1。バックアップUPSシステム

2。モバイルパワーと有用性の欠如であるエリアの待機電力。

3オフグリッドソーラー&＃038;風力発電システム

特長

1。純粋正弦波出力、フルパワー

2 CPUの管理と制御、モジュール設計

3 LCDディスプレイは、視覚的に各種パラメータを表示することができる

4。多機能の設計は、作業モードのさまざまな設定ができます

5[illegible]

6[illegible]

7[illegible]5[illegible]

8[illegible]

9[illegible]CE / EMC / LVD / RoHS[illegible]

10[illegible]

[illegible]

[illegible]		10KVA
[illegible]		7000W
[illegible]		14000W
[illegible]DC[illegible]		96V / 192V[illegible]
[illegible]W×D×H[illegible]mm[illegible]		420 * 260 * 605
[illegible]W×D×H[illegible]mm[illegible]		440 * 280 * 625
[illegible]kg[illegible]		55
[illegible]kg[illegible]		65
[illegible]		
[illegible]	1	[illegible]
[illegible]	2	[illegible]5[illegible]
	3	[illegible]
AC[illegible]	[illegible]	220V[illegible]35[illegible]110V + 35[illegible]±
	[illegible]	3[illegible]60Hz±3[illegible]±50Hz[illegible]
AC[illegible]	[illegible]	220V±3[illegible]230V±3[illegible] 240V±3[illegible]100V±3[illegible]
		[illegible]110V[illegible]±3[illegible]
	[illegible]	0.5[illegible]60Hz±0.5±50Hz[illegible]
[illegible]	AC[illegible]	0[illegible]15A
	[illegible]	[illegible]
	[illegible]	[illegible]·[illegible]
[illegible]	[illegible]	LCD
	[illegible]	[illegible]
[illegible]		[illegible]rate≤3
[illegible]		> 120[illegible]1[illegible]> 130[illegible]10S
[illegible]	[illegible]	1[illegible]6W
	[illegible]	1[illegible]3A
[illegible]		80[illegible]90[illegible]
[illegible]		<5ms[illegible]AC / DC[illegible]AC[illegible]
[illegible]		[illegible]
[illegible]	[illegible]	-10℃[illegible]50℃
	[illegible]	10[illegible]90[illegible]
	[illegible]	≤4000m

[illegible]

POWER INVERTER

POWER INVERTER

RS232
WARNING
AC INPUT
AC OUTPUT 220V