

| | | |
|-------|-----------------|-----------------------|
| RS232 | 12V / 24V / 48V | COM |
| LAN | 12V / 24V / 48V | IP / TCP |
| | | ≤40dB |
| | | 95°C |
| | | 85°C |
| | | 2002/95 / EC |
| | | 270 * 185 * 90 |
| | | 3 |
| | | 3.6 |
| | | CE / RoHS / PSE / FCC |
| | | EN61000 |
| | | IP21 |
| | | 0°~90°RH |
| | | 0~3000 |
| | | -20°C~+ 40°C |
| | | -40°C~+ 75°C |
| | | 70~106kPa |


□□ □□□□OEM□□□□ODM service.The 36V / 72V / 96V□□□□□□□□□□□□□□□□□□□□

□□□□□□

| NO. | Quantity | Description |
|-----|----------|--|
| 1 | 1 unit | Charge controller |
| 2 | 2 pc | Terminals |
| 3 | 2 pc | Gallow pulley (For install the controller on the wall) |
| 4 | 4 set | Screw (For install the controller on the wall) |
| 5 | 1 pc | 232 turn to RJ45 communication cable |
| 6 | 1 pc | User manual |
| 7 | 1 pc | Temperature sensing wire |
| 8 | 2 pc | Fuse wire |

- 1. MPPT Controller
- 2. Battery

Diagram

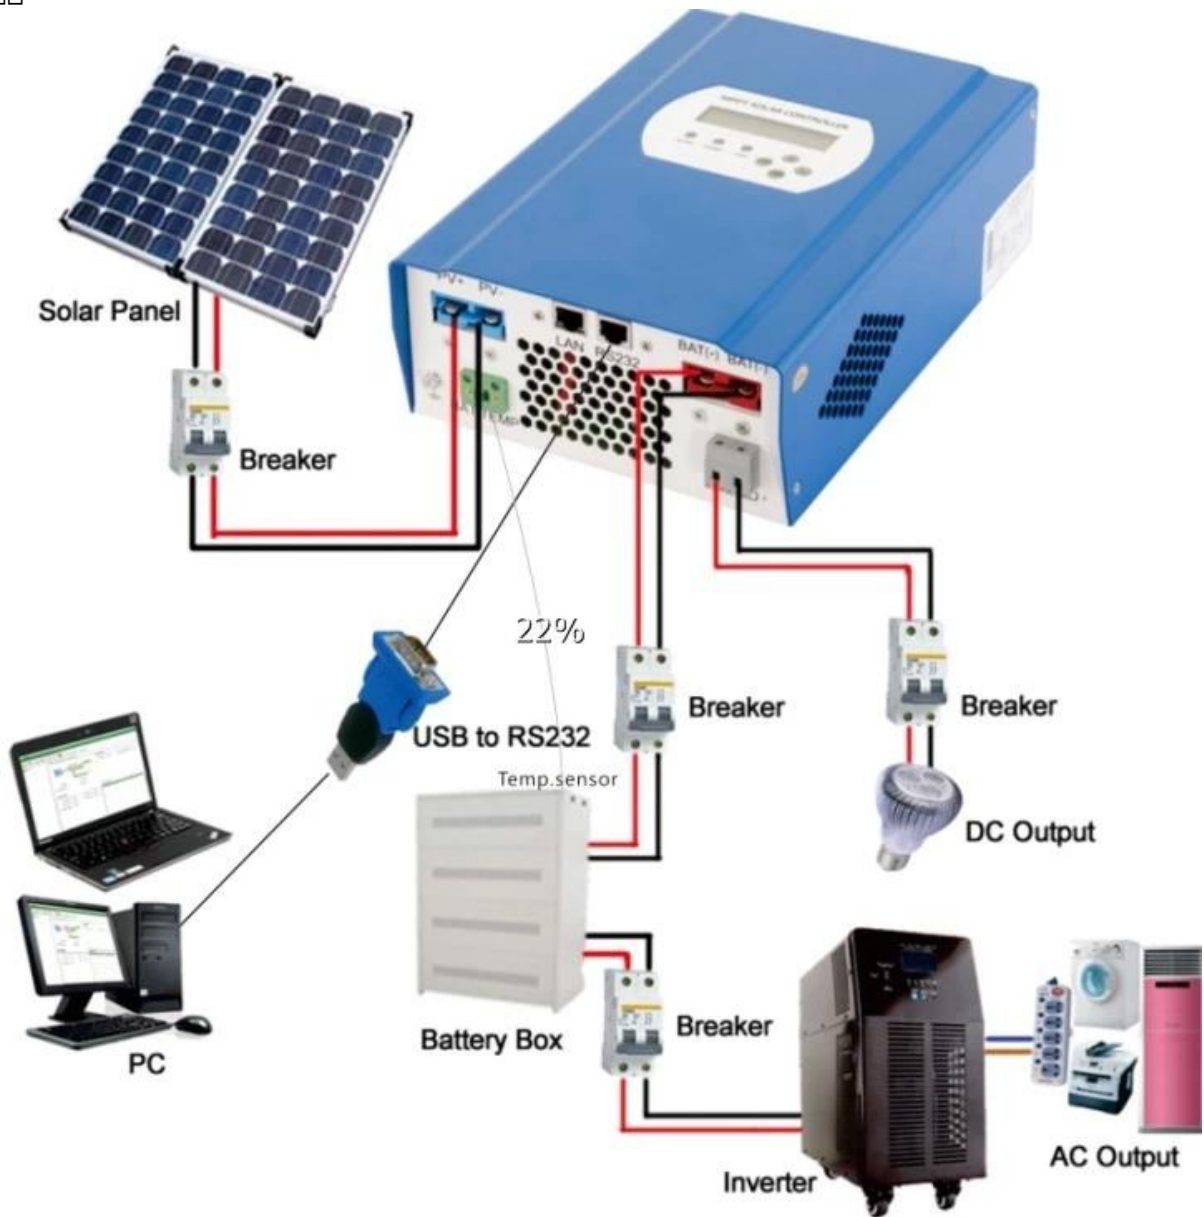

- 1. Solar Panel
- 2. Battery

Diagram

Diagram