




CHARGE			
電池の種類	NiCd		
充電電圧	12V / 24V / 48V SYS	DC10V / DC15V / 12V	
充電電流	20A	25A	30A
充電電流	25A	30A	35A
充電精度	±0.02%/°C		
充電温度	14.2V-25°C* 0.3		
充電電圧精度	200mV		
充電電流精度	≤±1.5%		
充電電圧・電流精度	200mV		
充電電圧精度	≤±1.5%		
DISCHARGE			
充電電圧	LAN		
充電電流	30A		
充電電流	420W	840W	1680W
充電電流	40A*2		
充電電流	ON OFF ON		
ON / OFF	ON / OFF		
PV	PV		
PV	PV		
充電電圧	10.5V 1V		
PORT			
RS232	COM		
LAN	IP TCP		
充電電圧	/		
充電電流			
充電電流	95°C		
充電電流	85°C 3A		
充電電流	≤40dB		
充電電流			
充電電流	EU 2002/95 / EC substances.All 105°C		
PHYSICAL			






The interface of upper computer software working state

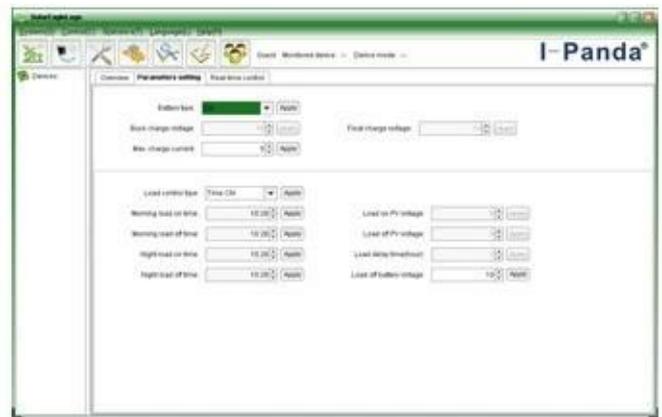

The interface of upper computer software parameter setting state




Upper computer software on/off interface and generating capacity record clean interface

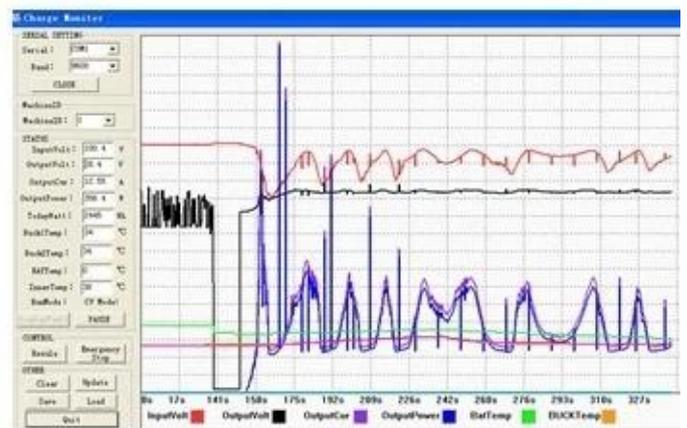

The interface of test software working state

MPPT

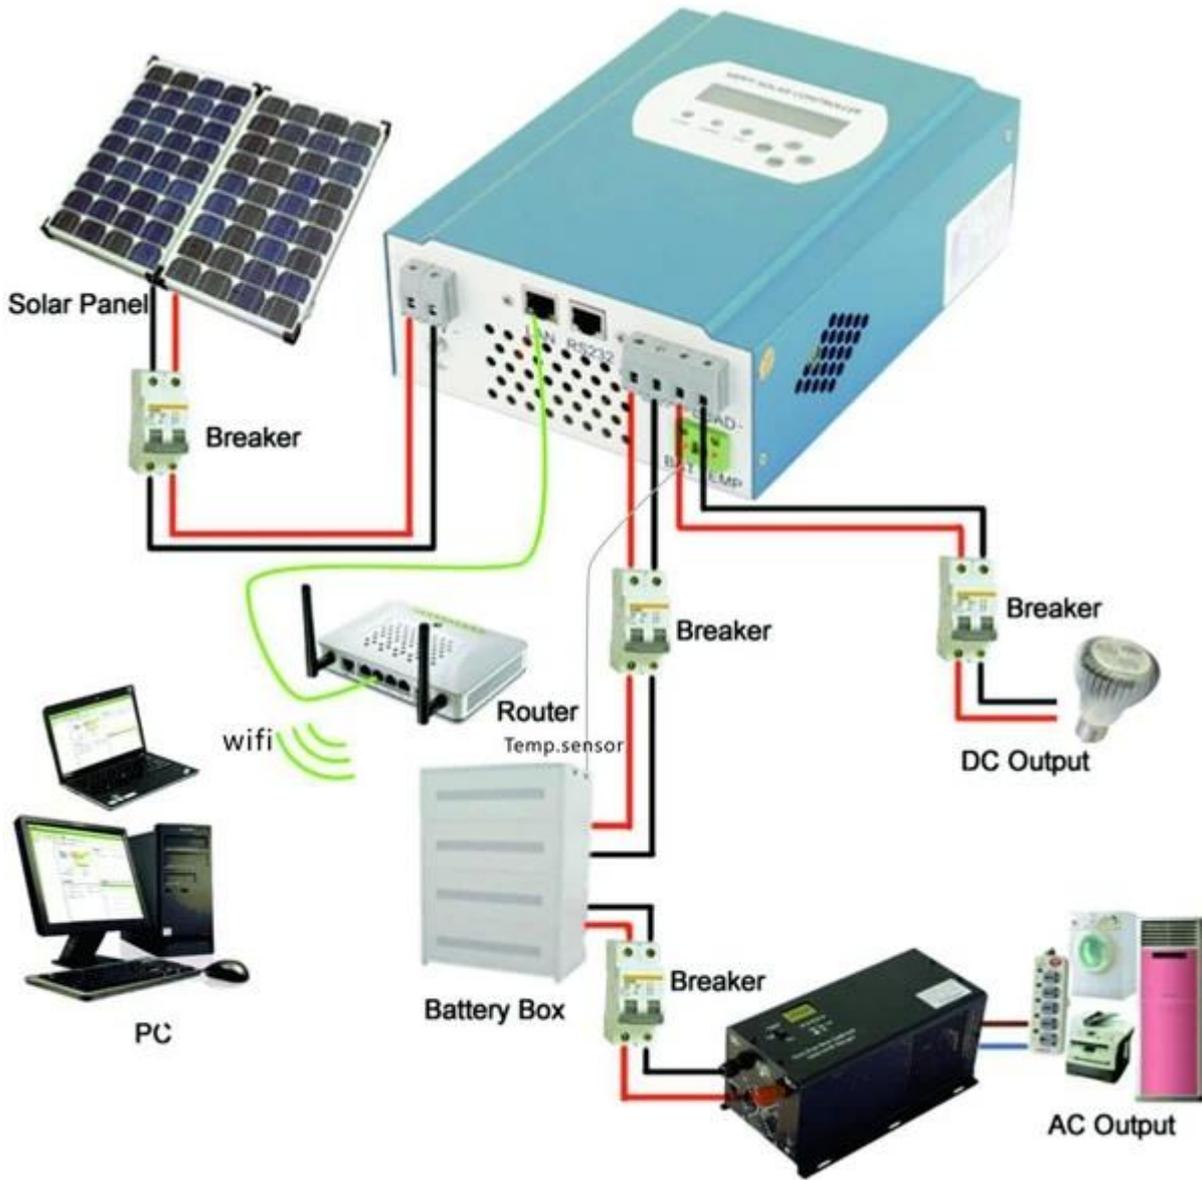

[ISO2008](#)  
[ISO2004](#)  
[CE](#)  
[FCC](#)  
[ROHS](#)

1 [OEM/ODM](#)  
 2  
 3 24 3 10  
 4