

1. MPPT 效率 99%  
 2. 12V / 24V / 48V  
 3. Wide 范围 DC150V  
 4. Unlimited  
 5. Journal  
 6. Charge 3  
 7. Discharge / OFF  
 8. Recommended NiCd  
 9. Most LCD LED PV  
 10. RS232 LAN IP area.And  
 11.  
 12. With  
 13. Adopting 105°C 10  
 14. Compliance  
 15. Equipment + CD-ROM + + +  
 16. CE ROHS

- 1.MPPT效率99%
- 2.12V / 24V / 48V
- 3.Wide 范围 DC150V
- 4.Unlimited
- 5.Journal
- 6.Charge 3
- 7.Discharge / OFF
- 8.Recommended NiCd
- 9.Most LCD LED PV
- 10.RS232 LAN IP area.And
- 11.
- 12.With
- 13.Adopting 105°C 10
- 14.Compliance
- 15.Equipment + CD-ROM + + +
- 16.CE ROHS

规格表

MODEL I-P-SMART2-20A / 25A / 30A -	20A	25A	30A
MPPT 效率	99%		
输入电压	12V 24V 48V		
输入电压范围	≤10S		
输入电压范围	500US		
效率	≥96.5% ≤99%		
PV 效率	≥99%		
MPPT 效率	12V DC	DC18V DC150V	
	24V DC	DC34V DC150V	
	48V DC	DC65V DC150V	
输出电压	12V DC	DC16V	
	24V DC	DC30V	
	48V DC	DC60V	
输出电压	12V DC	DC22V	
	24V DC	DC34V	
	48V DC	DC65V	
输出电压 DC	DC160V		
输出电压	DC150		
输出电压	DC145V		
最大功率 PV	12V DC	286W	357W
	24V DC	572W	715W
	48V DC	1144W	1430W
			429W
			858W
			1716W



重量	0.3000kg
工作温度	-20°C ~ + 40°C
存储温度	-40°C ~ + 75°C
湿度	70% ~ 106kPa

支持OEM/ODM定制 36V / 72V / 96V

配件清单

NO.	数量	描述
1	1	蓝色设备
2	2 PC	Gallow
3	4	
4	1	RJ45 232
5	1	
6	1	
7	2 PC	



Blue



Green



Upper Computer




Package

其他配件




The interface of upper computer software working state

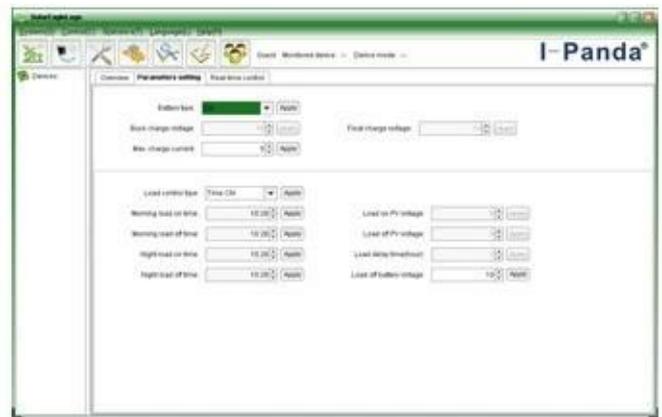

The interface of upper computer software parameter setting state



Upper computer software on/off interface and generating capacity record clean interface

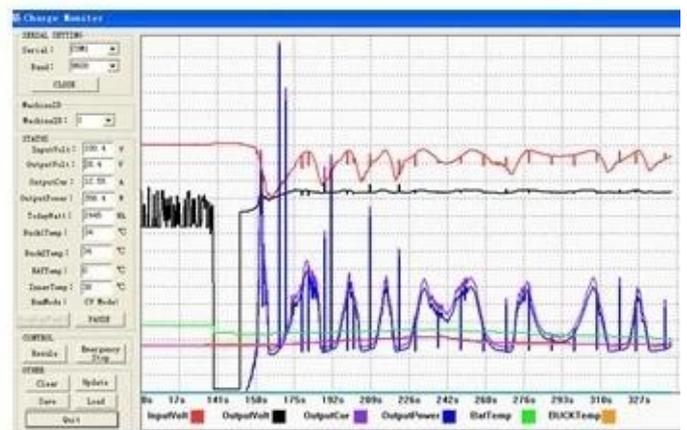

The interface of test software working state

MPPT

