


96V 192V 216V 240V 384V MPPT

New Arrival
GALAXY
MPPT Solar Controller
96V 192V 216V 240V 384V



Galaxy MPPT PV RS485 RS232 LAN

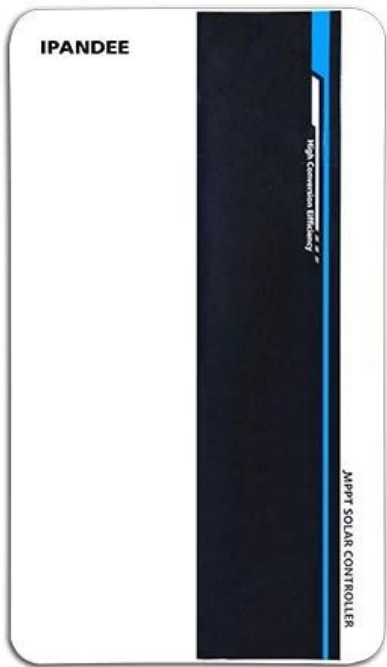

		PV	
Galaxy-B96-XXA	96V 8*12V	430V	70a; 80a
Galaxy-B192-XXA	192V 16*12V	430V	50a; 60a
Galaxy-B216	216V 18*12V		
Galaxy-B240-XXA	240V 20*12V		
Galaxy-B384-XXA	384V 32*12V	850V	70a; 80a

1. MPPT MPPT ≥ 99.5 98

2. 3.

3. / PV PV+

4. 3 \ gel \ flooded

5. PV

6. -

7. LCD

8.RS485

9. ☐ Support PC ☐ WiFi ☐

10.CE ROHS FCC

11 3 3 10

IPANDEE MPPT Model: Explorer-M2460 Firmware: V2.6 Serial: 9246111120220419 Message: Click [START EDIT] to modify parameters!

Running State
Standby

Real-time Data
PV Volt: 0.1V
BAT Volt: 14.2V
Load Volt: 14.1V
CHG Curr: 0.0A
Load Curr: 0.4A
CHG Power: 0W
Load Power: 5W
Inner Temp: 27.0°C
BAT Temp: 25.0°C
Alarm Tip: PV Low

Electricity Statistics
Day CHG: 0.0kWh
Month CHG: 0.0kWh
Total CHG: 0.0kWh
Day Used: 0.5kWh
Month Used: 0.5kWh
Total Used: 0.5kWh

Bat Parameters Of Controller
Bat Category: FLD System Volt: (Auto)12V
C.V. Charge: 14.6V Float Charge: 13.8V
Equalizing V: 14.8V Equalizing T: 30 min
Max Chg Curr: 60.0A Max Load Curr: 30.0A
Battery Over: 15.0V Over Recover: 14.8V
Battery Low: 10.5V Low Recover: 11.0V

Load Output Parameters Of Controller
Load Control Mode: On Mode
Note: If Vbat exceeds the protection, will turn off!

Bat Parameters Set
Select Battery
BatType: FLD Sys.Volt: Auto
Max CHG -I: 60.0A
Max Load-I: 30.0A
SAVE

Load Acid Battery (9~15V)
C.V. Charge: 14.6V
Equalizing V: 14.8V
Float Charge: 13.7V
Equalizing T: 30 min
Battery Over: 15.0V
Over Recover: 14.8V
Battery Low: 10.5V
Low Recover: 11.0V

Lithium Battery
Charge Volt: 14.4V
Nominal Volt: 12.8V
Battery Over: 16.2V
Over Recover: 14.4V
Battery Low: 7.8V
Low Recover: 8.8V
SAVE

Load Output Set
Light Mode
On Load->PV Low: 10.0V Off Delay: 0 min
Off Load->PV OK: 10.0V Off Delay: 0 min

Dual Timer Mode
Timer1->On Time: 10:30 Off Time: 22:00
Timer2->On Time: 00:00 Off Time: 00:00

Light-Time Mode
Dark->On Load->Pv Low: 10.0V On Hour: 17 H
Dawn->Off Load->Pv Ok: 10.0V On Hour: 0 H

Load Mode Selection:
On Mode SAVE

Copyright (C) IPANDEE [2022/1] 2022-4-19 15:37:33 Bytes received: 378468 Bytes sent: 99320 Language: English 切换为中文

PC□□□□□□

PV



項目	項目	B96			B192 \ B216				
	項目	70a	80a	100a	50a	60a	70a	80a	100a
項目	項目	MPPT項目							
	MPPT項目	≥98%	≥98%	≥98%	≥98%	≥98%	≥98%	≥98%	≥98%
	項目	DC96V			DC192V \ DC216V \ DC220V \ DC240V				
	videntification項目	DC72V \ DC128V			DC144V \ DC256V \ DC162V \ DC288V \ DC180V \ DC320V				
	項目	項目							

