

PC

I-Panda

Device: Moxboard device: COM1[51_L1234567890123456] Device mode: Constant voltage charging

Devices: COM1[51_L1234567890123456]

Overview | Parameters setting | Real-time control

Collector type: Gel Model name: IPANDA-MPPT-63A
Main firmware version: 1.0

Input information

PV voltage: 105.1 V Environment temperature: 38.0 °C


Output information

Output voltage: 27.1 V Output power: 0.0 W
Output current: 0.0 A Total power: 3.8 W
Battery temperature: 0.0 °C

Real-time events

| ID | Level | Time | Event |
|------|---------|------------------|-----------------------|
| 3001 | Message | 2011-11-05 15:20 | Communication restore |
| 3002 | Message | 2011-11-05 15:20 | Communication lost |
| 3001 | Message | 2011-11-05 15:20 | Communication restore |

□1□PC□□□□□□□□

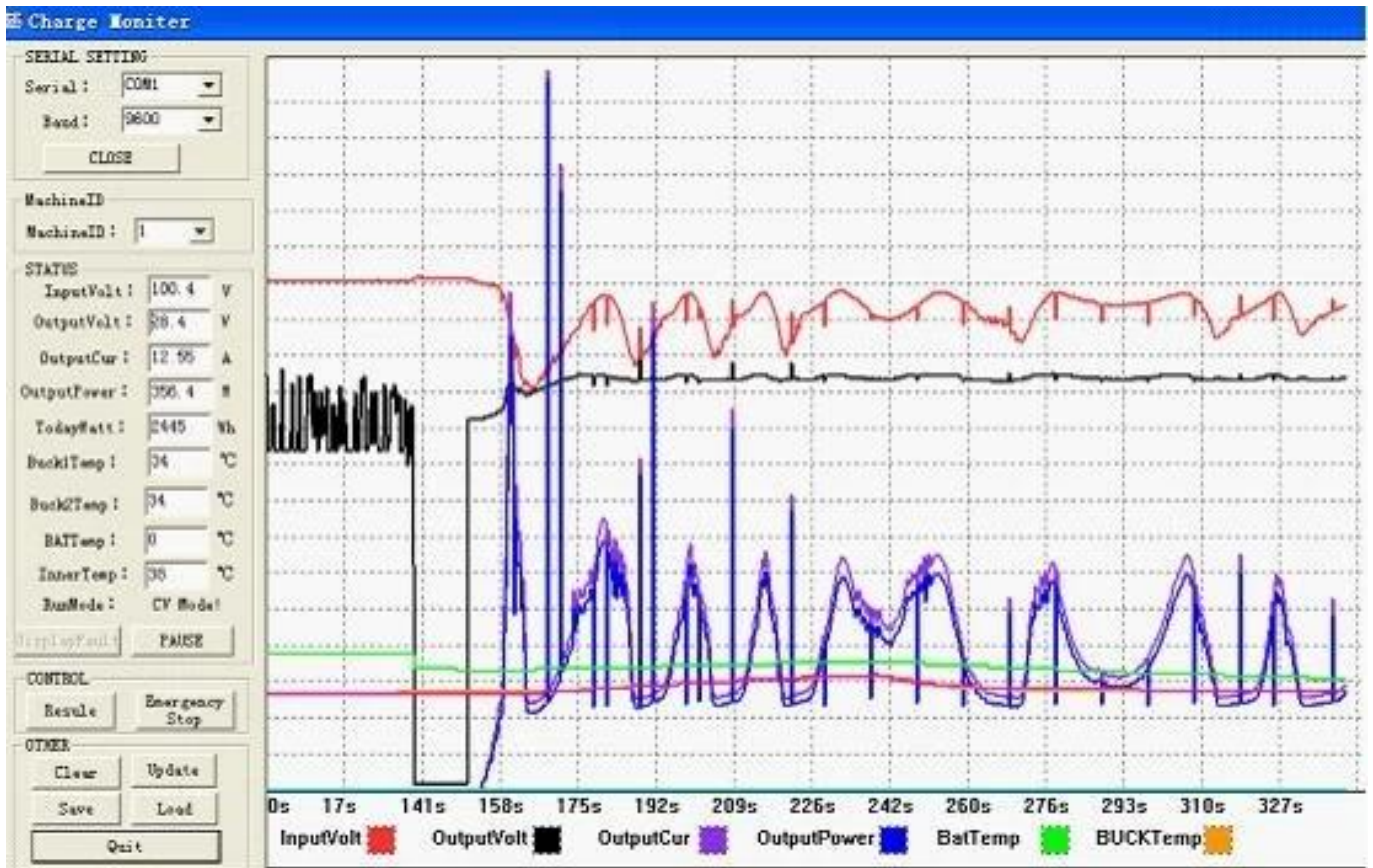

□□□□□□□□□□

□□□□



Solar Panel



| | | |
|------------|-----------------|-------------|
| I-P-SMART1 | 12V/24V/48V | 40A 50A 60A |
| I-P-SMART1 | 12V/24V/48V/96V | 20A 30A |
| I-P-SMART2 | 12V/24V/48V | 20A 25A 30A |
| I-P-SMART2 | 12V/24V/48V | 40A 50A 60A |



Battery



I-P-SP Series



Loading

