




Power	12V/24V/48V	570W	700W	900W
PV	24V/48V	1130W	1400W	1700W
	48V	2270W	2800W	3400W
System	12V / 24V / 48Vsystem	Nickel-Cadmium (NiCd) battery		
Input	12V / 24V / 48V	14.6V		
Output	12V / 24V / 48V	29.2V		
Current	12V/24V/48V	58.4V		
Capacity	12V / 24V / 48V	40A	50A	60A
Efficiency	12V / 24V / 48V	44A	55A	66A
Temperature	12V / 24V / 48V	±0.02°C		
Accuracy	12V / 24V / 48V	14.2V-0.001V/25°C*0.3		
Resolution	12V / 24V / 48V	200mV		
Linearity	12V / 24V / 48V	≤±1.5%		
LCD		LCD display		
LED		3 LED indicator		
Interface		RS232/LAN		
Dimensions		270 * 185 * 90 mm		
Weight		3 kg		
EMC		EN61000		
Protection		IP21		
Humidity		0-90%RH		
Storage		0-3000h		
Operating		-20°C + 40°C		
Storage		-40°C + 75°C		
Pressure		70-106kPa		

Product information and specifications.

OEM/ODM service. The 36V / 72V / 96V product is available for OEM/ODM service.



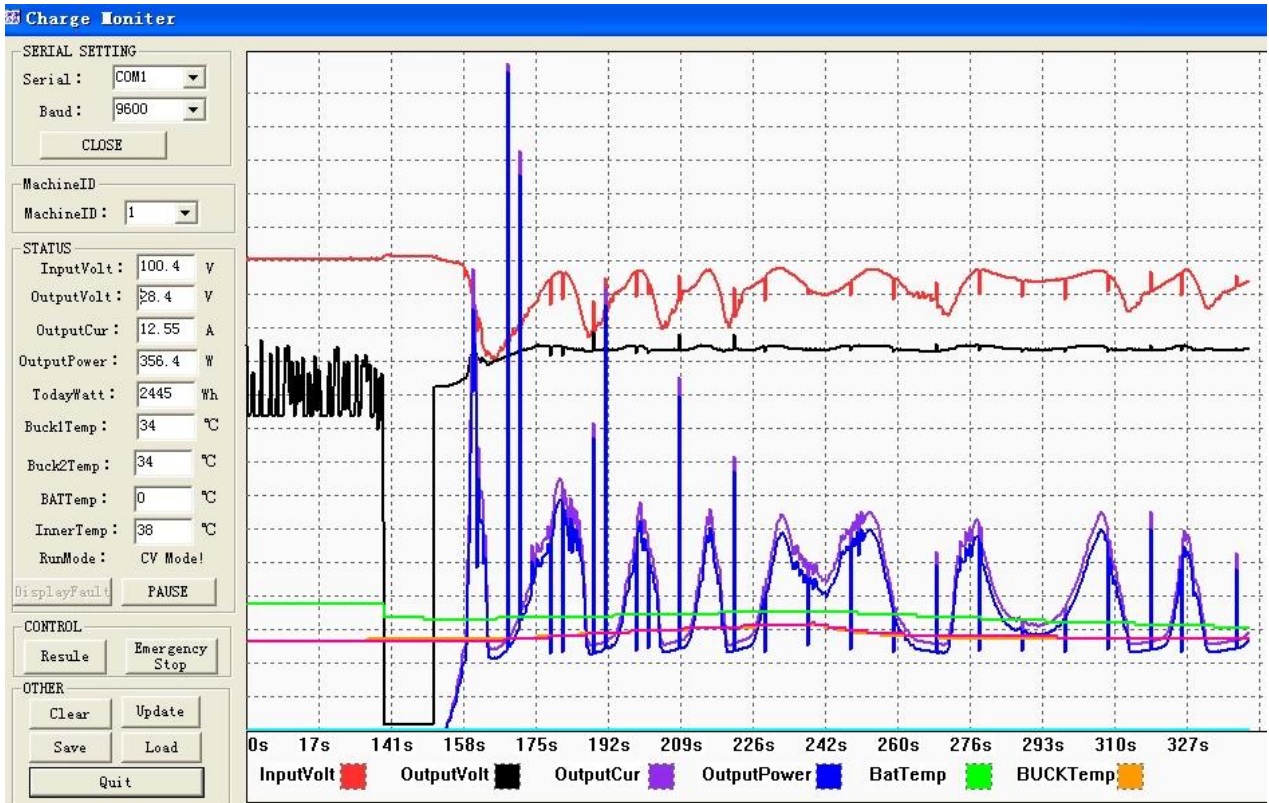

□□□□□□□□

□□□□



□□□□

