
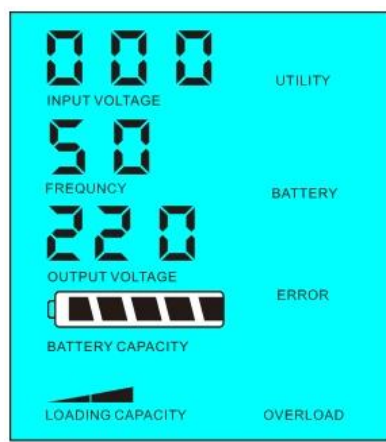



1.2 LCD 000 FREQUENCY AC 5 02.If 1-6W LCD 5 LCD output

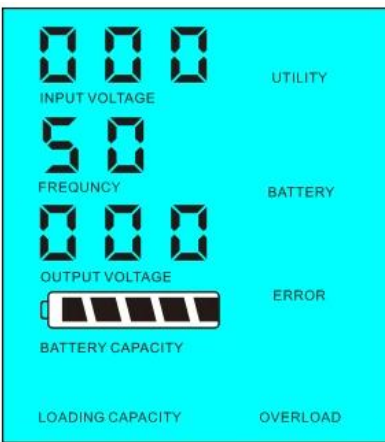

< 5

> 5

2 UPS AC DC

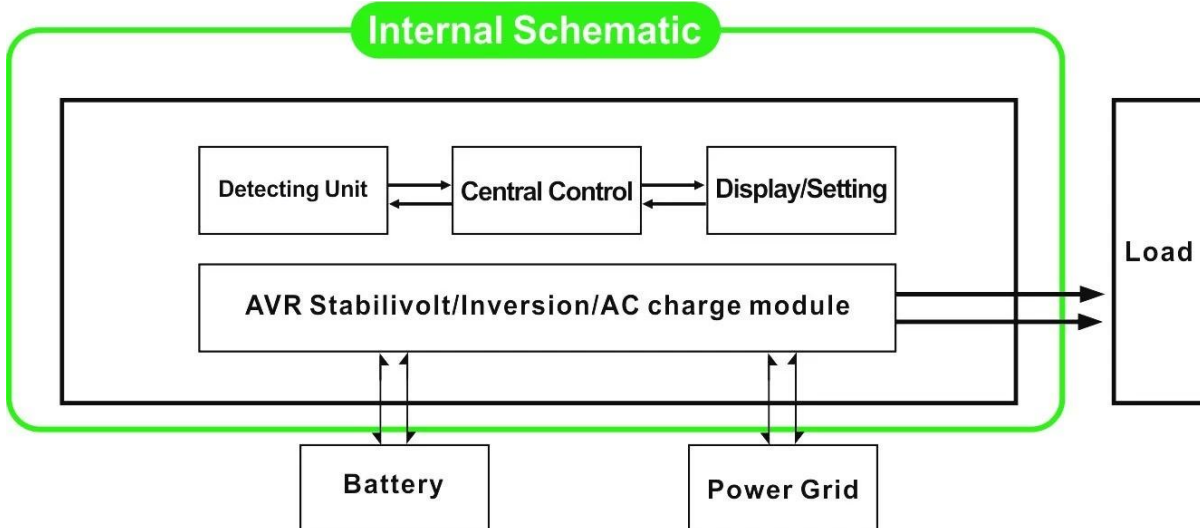


2.1 AC 01


1

2 5ms DC AC




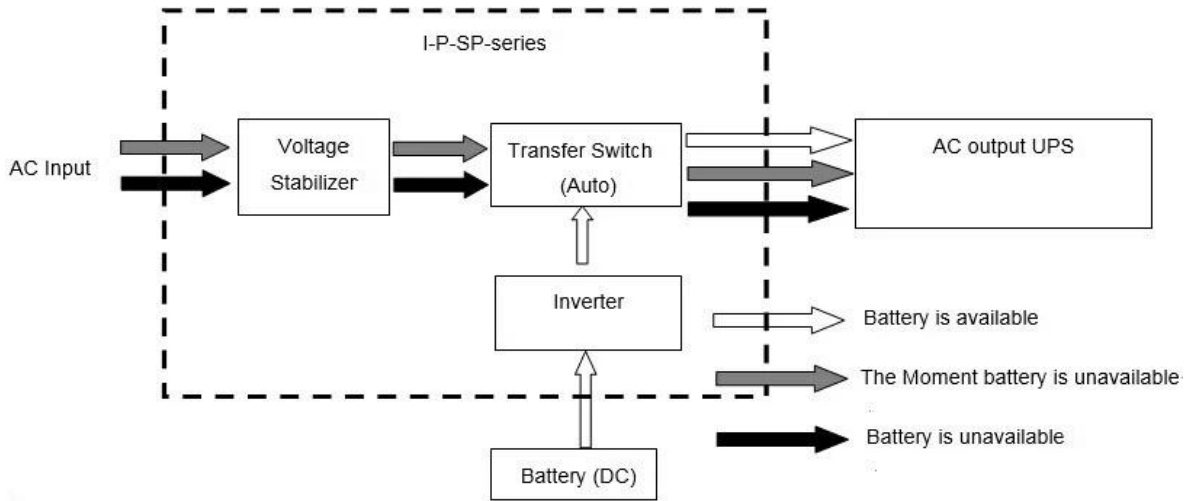

液晶LCD

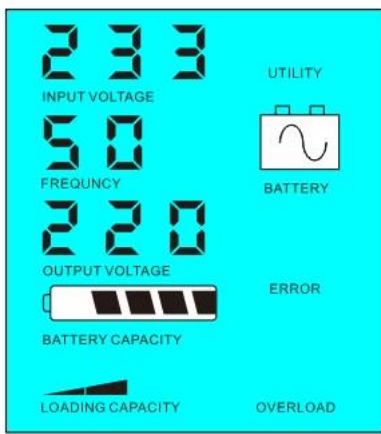

液晶LCD

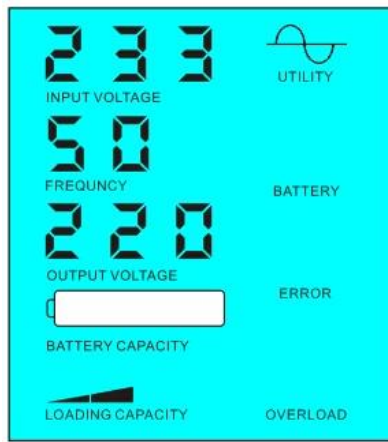

液晶LCD

规格

额定容量	3000VA
额定功率	2000W
最大输出功率	4000W
直流输入电压	24V / 48V / 96V
外形尺寸(WxDxH)mm	350 * 220 * 460
外形尺寸(WxDxH)mm	370 * 240 * 480
重量kg	23
噪音dB	25
操作模式	1 AC输入模式
操作模式	2 旁路模式
操作模式	3 DC输入模式
AC输入	220V±3% 35±110V + 35±
AC输入	3±60Hz±3±50Hz
AC输入	220V±3% 230V±3% 240V±3% 100V±3% 110V±3%
AC输入	0.5±0.5% 60Hz±50Hz
AC输出	0~15A
其他	
其他	

		LCD
		THD≤3
		> 120 1 > 130 10S
		1 6W
		1 3 a
		90 80
		<5ms DC / DC AC AC
		-10°C 50°C
		90 10
		≤4000m

D R&

OEM ODM

etc.Research 2014 5 5 2TH





