




AC DC LCD

2  
 8  
 &NBSP  
 CC CV CF



0 0

3 UPS  
 AC DC

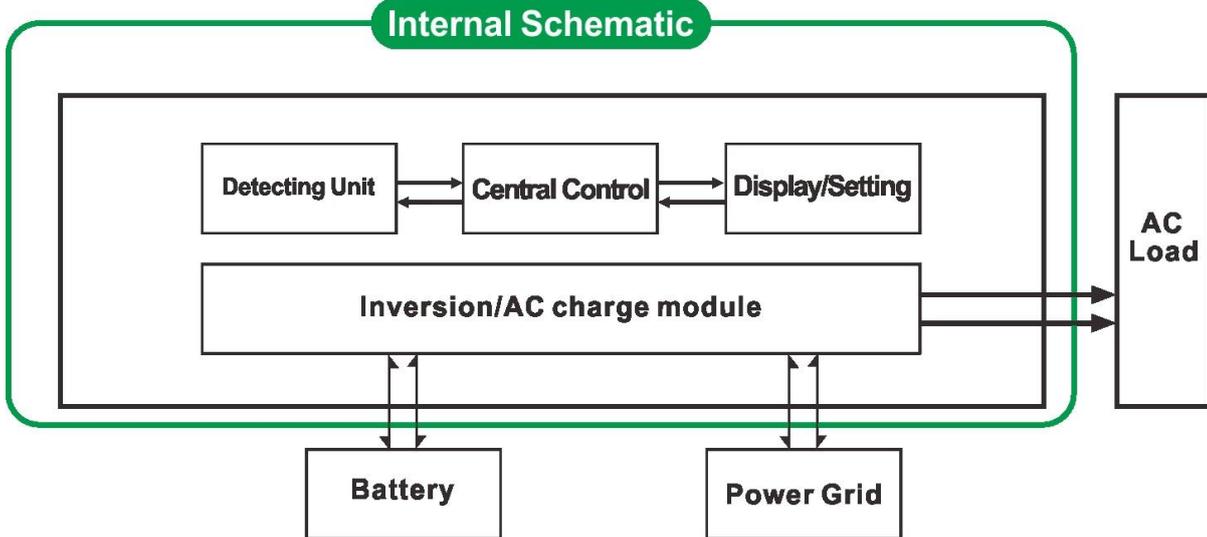

3.1 1 UPS AC  
 1 0 LCD  
 2 5ms AC DC UPS  
 3 ; &NBSP; &NBSP; &NBSP; &NBSP; &NBSP;

3.2 UPS DC  
 0  
 3

1  
 2  
 3

4000W

输出功率		4000W
最大功率		12000W
输入电压DC		24V~48V
输入尺寸WxDxHmm		440 * 218 * 400
输出尺寸WxDxHmm		520 * 275 * 520
重量kg		39
重量kg		43
启动方式	□	□
启动方式	S-ON	□16W □5
	□	□
AC输入	□	220V±3% 35±110V + 35±
	□	50Hz~60Hz
AC输出	□	220V±3% ±230V 3~240V±3% 100V±3%
	□	□110V±3%
	□	□DC / AC □50Hz □60Hz
	AC输入	24V 48V
	MAX	65A 35A
启动方式	□	□1 □2
启动方式 "0"	□	□ OEM
启动方式	□	□CC □CV □CF
	□	□
	□	□
UPS	AC	□
	DC	□
启动方式	□	□+□LED
	□	□
启动方式		□
启动方式		> 120~1 > 130~10S
	□	□6W
	□	□3A
		87~98
		□DC / DC <5ms □AC AC
		□
		□
	□	-10°C~50°C
	□	10~90
	□	≤4000m

□  
□R&□D □OEM □ODM

□  
□  
□2014□5□13□2TH