

# I-P-HPC-Series System



I-P-HPC-Series Inverter+Solar Controller


□□□□

- 1. [MPPT](#) I-P-HPC AC DC
- 2. Solar



XXXXXXXXXXXXXXXXXXXXXXXXXXXX

DXXR&038XXXXXXXX

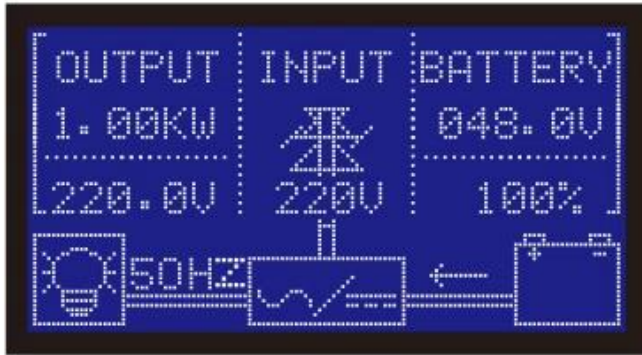

□□







□□□□□□

□□□□□□□□	1000W	1500W	2000W	3000W	4000W	5000W
□□□□□□	1000W	1500W	2000W	3000W	4000W	5000W
□□□□□□	2000W	3000W	4000W	6000W	8000W	10000W
□□□□□□	24V	24V / 48V□□□□□□			48V	
□□□□□□						
□□□□□□□□	PV□					
□□□□□□□□	□PV□+□□□□□□□□					
MPPT□□□□□□□□□□	□□	24V	24V / 48V		48V	
	□□□	20A	25A	30A	40A	40A
	□□□□PV□□□□	100V				
	PV□□□□	95□□99□□				
□□□□□□□□	□□□□-PV□□□□	568W	24V□710W	24V□852W	24V□1136W	2272W
			48V1420W	48V□1704W	48V□2272W	2272W
□□□□□□□□	AC□□□□	0□15A				
□□□□□□□□	□□□□	3□□□				
AC□□	□□	220V±3□□□230V±3□□□240V±3□□□100V±3□				
	□□□	□□□110V□±3□□□□□□□□				
	□□□	0.5±0.5□□60Hz±50Hz□□□□□□□□				
□□□□		□□□□□□□□□□THD≤3				
□□□□		> 120□□□> 130□□105				

额定功率 额定输出功率	0.4A	24V/0.5A 48V/0.4A	24V/0.7A 48V/0.45A	24V/0.7A 48V/0.5A	0.6A	0.65A
额定电压	1-6W					
额定输入电压	85~92V					
AC输入	220V±35/110V + 35%±					
AC输出	220V±5/110V + 5%					
浪涌电流	> 120ms > 130ms					
AC/DC转换效率	AC/DC					
UPS类型	DC/AC					
转换时间	< 5ms (AC/DC/DC)					
效率	AC/DC					
显示	LCD+LED					
工作温度	-10°C~50°C					
存储温度	-90°C~10°C					
工作湿度	≤4000m					
尺寸 WxDxH(mm)	438 * 208 * 413				450 * 246 * 468	
重量 WxDxH(mm)	520 * 310 * 460				540 * 300 * 518	
重量 kg	15	17	19	25	34	35
重量 kg	16	18	20	27	40	41