

**MPPT 48V 100A**



**特點**

1. MPPT轉換效率MPPT $\geq 99.5\%$  98% 轉換效率
2. 3年保固
3. 支援多種電壓 / PV 電池 / PV + 電池
4. 支援多種電壓
5. 3種電池類型 SEAL \ gel \ flooded 支援 FCAN 電池
6. PV 電池保護
7. 溫度保護
8. LCD 顯示
9. RS485 通訊
10. PC 支援 WiFi
11. CE \ ROHS \ FCC 認證
12. 3年保固 3 10 年保固

**規格表**

規格表		48BL-100A	
基本規格	轉換效率	MPPT 轉換效率	
	MPPT 效率	99.5%	
	轉換功率	0.5W ~ 1.2W	
	電壓	電壓	
	電流	電流	
輸出規格	max.pv 電壓 VOC	DC150V	
	電池電壓	電池電壓 + 3V	
	電池電壓	電池電壓 + 2V	
	輸出電壓	DC150V	
	輸出功率	12V 電池	1300W
		24V 電池	2600W
		36V 電池	3900W



MPPT Solar MonitorV1.0

# IPANDEE

MPPT Model: Explorer-M2460    Firmware: V2.6    Serial: 9246111120220419    Message: Click [START EDIT] to modify parameters!

Com Port: COM1

BaudRate: 9600

Address: 1

Opened

**Running State**

Standby

**Real-time Data**

PV Volt: 0.1V  
 BAT Volt: 14.2V  
 Load Volt: 14.1V  
 CHG Curr: 0.0A  
 Load Curr: 0.4A  
 CHG Power: 0W  
 Load Power: 5W  
 Inner Temp: 27.0°C  
 BAT Temp: 25.0°C  
 Alarm Tip: PV Low

**Electricity Statistics**

Day CHG: 0.0kWh  
 Month CHG: 0.0kWh  
 Total CHG: 0.0kWh  
 Day Used: 0.5kWh  
 Month Used: 0.5kWh  
 Total Used: 0.5kWh

**Bat Parameters Of Controller**

Bat Category: FLD    System Volt: (Auto)12V  
 C.V. Charge: 14.6V    Float Charge: 13.8V  
 Equalizing V: 14.8V    Equalizing T: 30min  
 Max Chg Curr: 60.0A    Max Load Curr: 30.0A  
 Battery Over: 15.0V    Over Recover: 14.8V  
 Battery Low: 10.5V    Low Recover: 11.0V

**Bat Parameters Set**

Select Battery

BatType: FLD    Sys. Volt: Auto

Max CHG -I: 60.0 A  
 Max Load-I: 30.0 A

**Lead Acid Battery(9~15V)**

C.V. Charge: 14.6 V  
 Equalizing V: 14.8 V  
 Float Charge: 13.8 V  
 Equalizing T: 30 min  
 Battery Over: 15.0 V  
 Over Recover: 14.8 V  
 Battery Low: 10.5 V  
 Low Recover: 11.0 V

**Lithium Battery**

Charge Volt: 14.4 V  
 Nominal Volt: 12.8 V  
 Battery Over: 15.0 V  
 Over Recover: 14.4 V  
 Battery Low: 7.6 V  
 Low Recover: 5.0 V

**Load Output Parameters Of Controller**

Load Control Mode: On Mode

Note: If Vbat exceeds the protection, will turn off!

**Load Output Set**

Light Mode

On Load->PV Low: 30.0 V    Off Delay: 10 min  
 OffLoad->PV OK: 30.0 V    Off Delay: 10 min

**Dual Timer Mode**

Timer1->On Time: 10 : 30    Off Time: 10 : 00  
 Timer2->On Time: 00 : 00    Off Time: 00 : 00

**Light-Time Mode**


Dark->On Load->PvLow: 30.0 V    On Hour: 10 H  
 Dawn->OffLoad->Pv Ok: 30.0 V    On Hour: 0 H

Load Mode Selection:


On Mode

Copyright(C)IPANDEE [2022/1]    2022- 4-19 15:37:33    Bytes received: 378468    Bytes sent: 99320    Language: English   



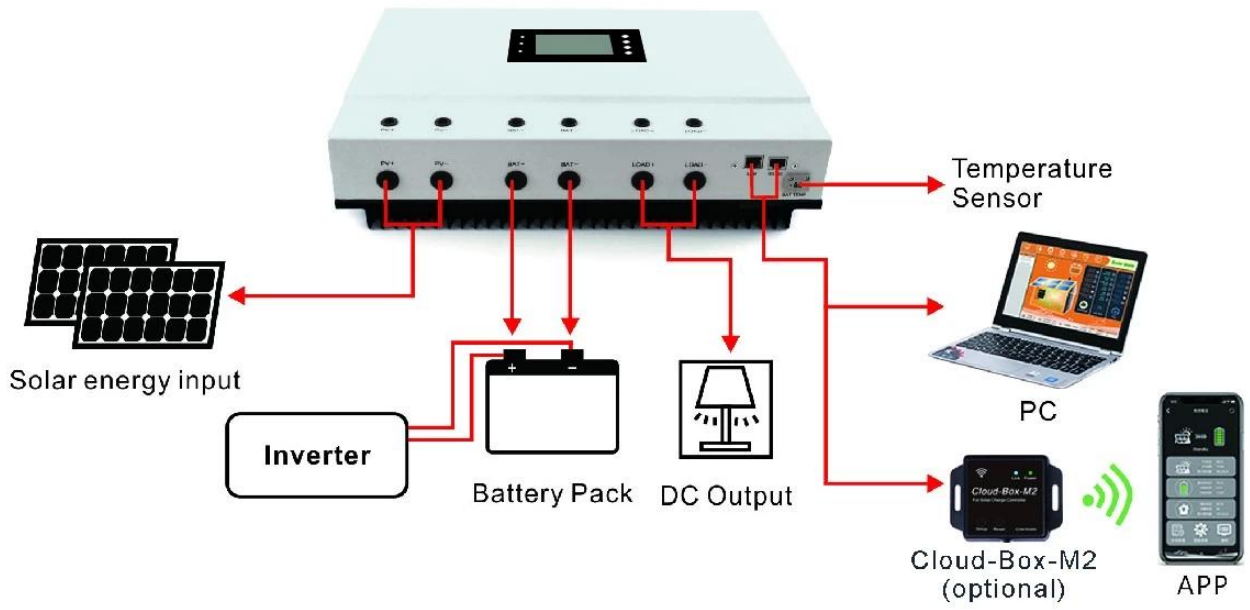

□□□□

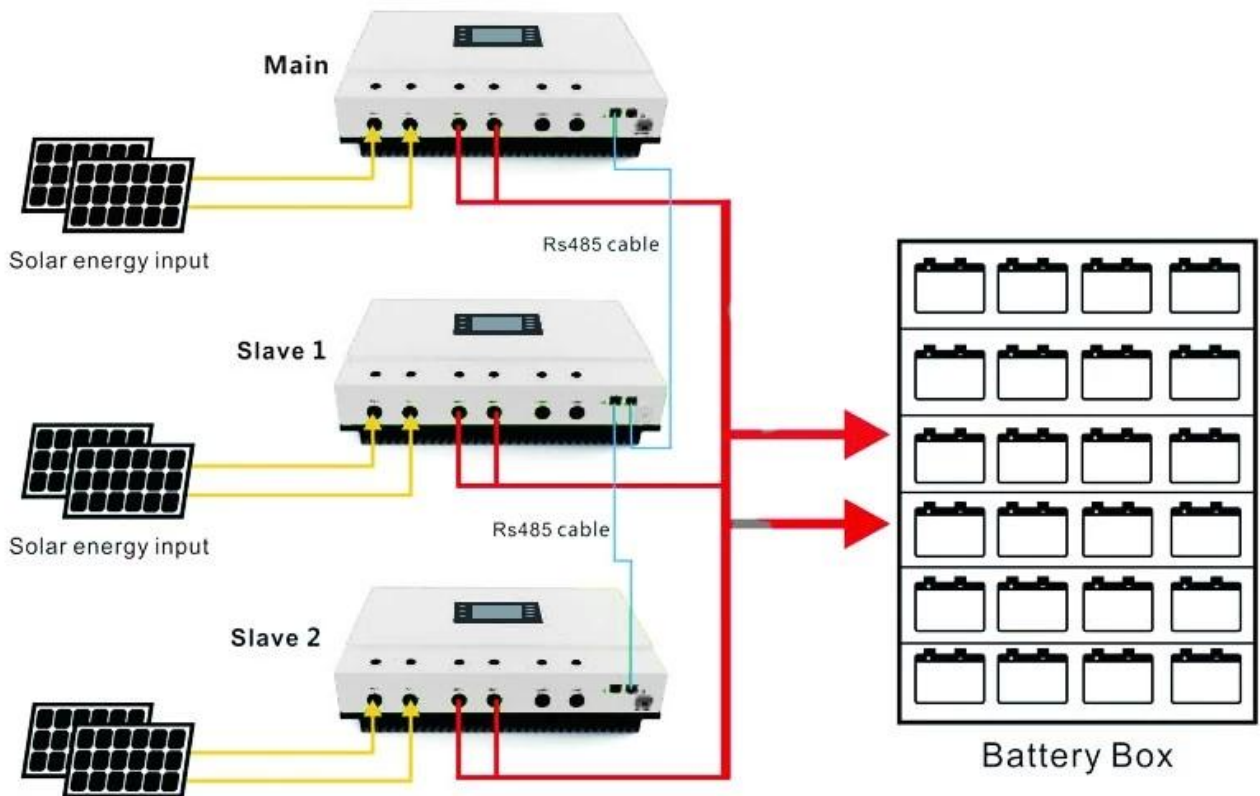

□□□ MPPT □□□□□□□□□□ 10 □□ 2016 □ SNEC □□□□ 10 □□□□□□□□□□□□□□□□

□  
□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

