

MPPT 80A 100A Solar Charge Controller 12v 24v 36v 48v for off grid solar system



Feature

1. It has an efficient MPPT algorithm, MPPT efficiency $\geq 99.5\%$ and converter efficiency up to 98%.
2. Large mode: three stages (constant current, constant voltage, floating charge), it prolongs service life of the batteries.
3. Four types of load mode selection: ON/OFF, PV voltage control, Dual Time control, PV+Time control.
4. Battery system voltage automatic recognition.
5. Three kinds of commonly used lead-acid battery (Seal/Gel/Flooded) parameter settings can be selected by the user, and the user can also customize the parameters for other battery charging.
6. Has a current limiting charging function. When the power of PV is too large, the controller automatically keeps the charging power, and the charging current will not exceed the rated value.
7. Support multi-machine parallel to realize system power upgrade.
8. High definition LCD display function to check the device running data and working status, also can support modify the controller display parameter.
9. RS485 communication, we can offer communication protocol to convenient user's integrated management and secondary development.
10. Support PC software monitoring and WiFi module to realize APP cloud monitoring.
11. RoHS, FCC certifications approved, we can assist clients to pass various certifications.
12. 2 years warranty, and 2~10 years extended warranty service also can be provided.

Parameter

MASTER series		48BL-80A	48BL-100A	48BH-80A
Product category	Controller Properties	MPPT (maximum power point tracking)		
	MPPT efficiency	$\geq 99.5\%$		
	Standby power	0.5W~1.2W		
	System voltage	Automatic recognition	48V	
	Heat-dissipating method	Air cooling		

Input Characteristics	Max.PV input voltage(VOC)	DC150V		DC300V	
	Start the charge voltage point	Battery voltage + 3V		Battery voltage + 10V	
	Low input voltage protection point	Battery voltage + 2V		Battery voltage + 5V	
	Over voltage protection point	DC150V		DC300V	
	Rated PV power	12V system	1040W	1300W	□
		24V system	2080W	2600W	□
36V system		3120W	3900W	□	
48V system		4160W	5200W	4160W	
96V system		□	□	□	
Charge Characteristics	Selectable Battery Types(Default Gel battery)	Sealed lead acid, Gel battery, Flooded (Other types of the batteries also can be defined)			
	Charge rated current	80A	100A	80A	
	Charging Method	3-Stage: constant current(fast charging)-constant voltage-floating charge			
LOAD Characteristics	Load voltage	The same as the battery voltage			
	Load rated current	80A	100A	80A	
	Load control mode	On\Off mode, PV voltage control mode, Dual-time control mode, PV + Time control mode			
Display & Communication	Display mode	High-definition LCD segment code backlight display			
	Communication mode	8-pin RJ45 port/RS485/support PC software monitoring/support WiFi module to realize APP cloud monitoring			

Other Parameters	Protect function	Input-output over \ under voltage protection,Prevention of connection reverse protection,battery shedding protection etc.
	Operation Temperature	-20°C~+50°C
	Storage Temperature	-40°C~+75°C
	IP(Ingress protection)	IP43
	Max. connection size	50mm ²
	Net Weight (kg)	7.1
	Gross Weight (kg)	8.8
	Product Size□mm□	420*280*95
	Packing Size(mm)	510*368*210

Upper Computer Software and Test Software

MPPT Solar MonitorV1.0

IPANDEE MPPT Model: Explorer-M2460 Firmware: V2.6 Serial: 9246111120220419 Message: Click [START EDIT] to modify parameters!

Com Port: COM1 BaudRate: 9600 Address: 1

Running State: Standby

Real-time Data: PV Volt: 0.1V, BAT Volt: 14.2V, Load Volt: 14.1V, CHG Curr: 0.0A, Load Curr: 0.4A, CHG Power: 0W, Load Power: 5W, Inner Temp: 27.0°C, BAT Temp: 25.0°C, Alarm Tip: PV Low

Electricity Statistics: Day CHG: 0.0kWh, Month CHG: 0.0kWh, Total CHG: 0.0kWh, Day Used: 0.5kWh, Month Used: 0.5kWh, Total Used: 0.5kWh

Bat Parameters Of Controller: Bat Category: FLD, System Volt: (Auto)12V, C.V. Charge: 14.6V, Float Charge: 13.8V, Equalizing V: 14.8V, Equalizing T: 30 min, Max.Chg Curr: 60.0A, Max LoadCurr: 30.0A, Battery Over: 15.0V, Over Recover: 14.8V, Battery Low: 10.5V, Low Recover: 11.0V

Bat Parameters Set: Select Battery, BatType: FLD, Sys.Volt: Auto, Max.CHG-I: 60.0A, Max.Load-I: 30.0A

Load Output Parameters Of Controller: Load Control Mode: On Mode, Note: If Vbat exceeds the protection, will turn off!

Load Output Set: Light Mode, On Load->PV Low: 14.0V, Off Delay: 5 min, OffLoad->PV OK: 14.0V, Off Delay: 5 min


Dual Timer Mode: Timer1->On Time: 00:00, Off Time: 00:00, Timer2->On Time: 00:00, Off Time: 00:00

Light-Time Mode: Dark->On Load->PvLow: 13.0V, On Hour: 12 H, Dawn->OffLoad->Pv Ok: 13.0V, On Hour: 12 H

Load Mode Selection: On Mode

Copyright(C)IPANDEE [2022/1] 2022- 4-19 15:37:33 Bytes received: 378468 Bytes sent: 99320 Language: English 切换为中文

System connection diagram

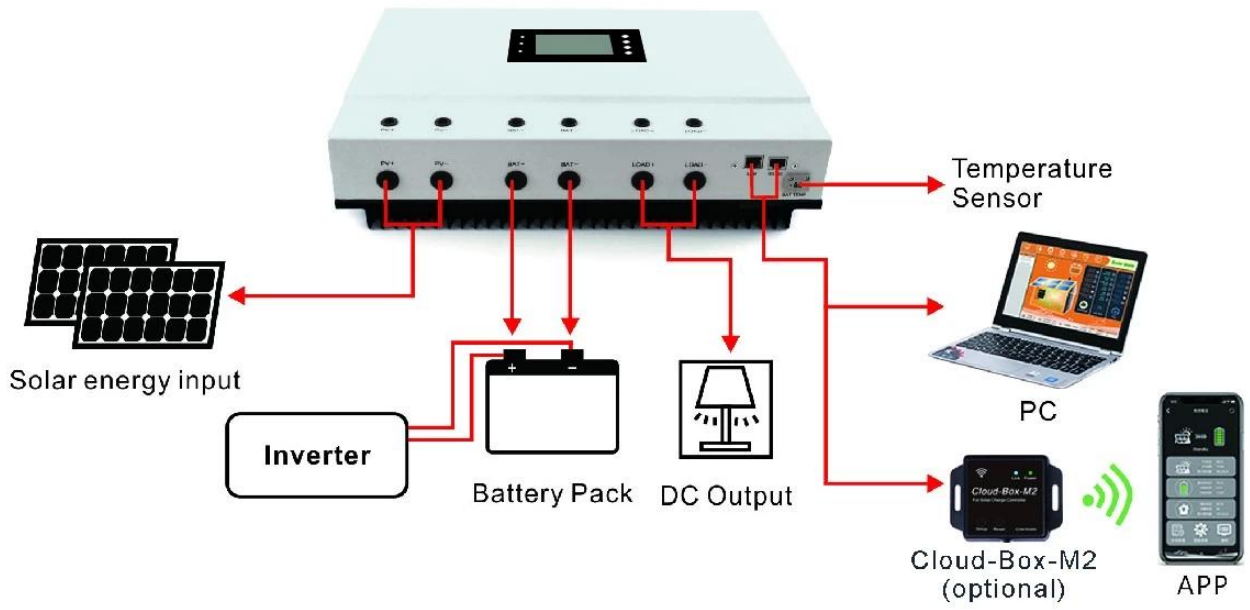

Parallel connection diagram

