


# I-Panda New 20A-60A off-grid system MPPT solar charge controller



[Explorer-M](#) develops solar field vision, making nature more beautiful and more efficient

A new generation of MPPT solar intelligent digital controller

- 1, self-heating, waterproof rating IP43
- 2, beautiful design, touch buttons, internal and external repair
- 3, four-stage charging to extend battery life
- 4, tracking efficiency as high as 99.8%
- 5, perfect protection function
- 6, can expand APP, host computer, and unlimited parallel
- 7, can monitor the entire system status, determine system matching, etc.



PV

BAT  
vF

DC  
500m

S


*MPPT*  
SOLAR CONTROLLER

CE RoHS








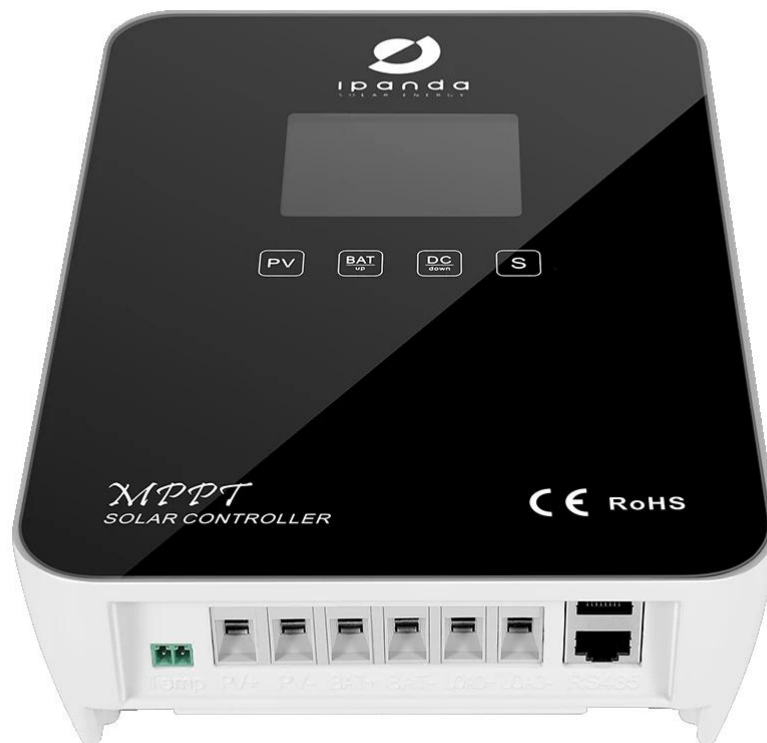

## Characteristics


- \* High-efficient MPPT algorithm, MPPT efficiency  $\geq 99.5\%$ .
- \* Support Seal/Gel/Flooded battery and customized batteries.
- \* Four types of load mode selection: ON/OFF, PV voltage control, Dual Time control, PV+Time control.
- \* All-in-one integrated design, high stability and reliability.
- \* Current-limited charging function.
- \* IP43 protection, natural-cooling.
- \* High definition LCD segment display.
- \* Intelligent interaction experience.
- \* Dual RS485 communication ports, support for parallel communication.
- \* Support PC and APP (Android & iOS) monitoring.
- \* CE, RoHS, FCC certifications approved.

## parameter

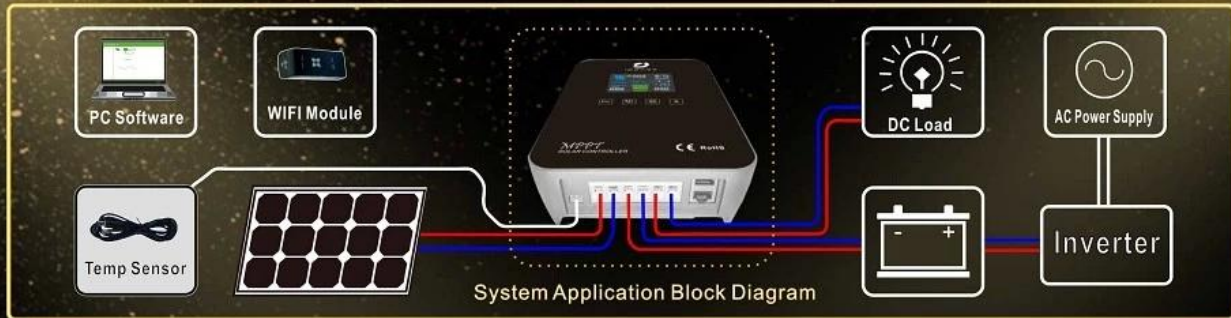

	Model	EM2420	EM2430	EM2440	EM2450	EM2460
Product Category	MPPT efficiency	≥ 99.5%				
	Standby consumption	0.5W~1.2W				
	Heat-dissipating method	Natural-Cooling				
	Battery system voltage range	12V system	9VDC~15VDC(Lead acid)			
24V system		18VDC~30VDC(Lead acid)				
Li-ion		8VDC~30VDC(Default), ≤30VDC(Optional activation function)				
Input Characteristics	Max. PV input voltage(Voc)	100VDC(Default), DC 150V(Optional)				
	Min. Vmpp Voltage	Battery voltage + 2V				
	Start-up charging voltage	Battery voltage + 3V				
	Low input voltage protection	Battery voltage + 2V				
	Over voltage protection /Recovery	100VDC/95VDC(Default), 150VDC/145VDC(Optional)				
	Rated PV Power	12V system	260W	390W	520W	650W
24V system		520W	780W	1040W	1300W	1560W
Li-ion		252W~504W	378W~756W	504W~1008W	630W~1260W	756W~1512W
Charge Characteristics	Activation for lithium battery	Optional				
	Battery types(Default Gel battery)	Sealed(SEL), Gel(GEL), Flooded(FLD), User-defined(USE), Li-ion(Lit)				
	Rated charge current	20A	30A	40A	50A	60A
	Temperature compensation	-3mV/C/2V (default)				
	Charge method	3-stages: CC(Constant Current), CV(Constant Voltage), CF(Floating Charge)				
LOAD Characteristics	Output voltage stability accuracy	± 0.2V				
	Load voltage	Same as battery voltage.				
	Rated load current	20A		30A		
	Load control mode	On/Off mode, PV voltage control mode, Dual-time control mode, PV + Time control mode				
	Low voltage protection	10.5V(default), 11V(restored), settable				
Display & Communication	Setting method	PC software / APP / Controller				
	Display	High-definition LCD segment code backlight display				
Other Parameters	Communication	Dual RJ45 port / RS485 protocol / PC (via RS485-USB Cable) & APP (via Wi-Fi module) / Centralized monitoring (via parallel connection and RS485-USB cable)				
	Protection	Input & output over-volt / low-voltage protection, reverse polarity protection, over-heating protection, battery shedding protection etc.				
	Operating ambient temperature	-20°C~+50°C				
	Storage temperature	-40°C~+75°C				
	IP(Ingress protection)	IP43				
	Noise	≤10dB				
	Altitude	0~3000m				
	Max. Wiring size	28mm <sup>2</sup>				
	Recommended breaker	≥ 40A	≥ 63A	≥ 63A	≥ 100A	≥ 100A
	N. weight (kg) / G. weight (kg)	1.65 / 1.98		2.35 / 2.78		
Product size/Packing size(mm)	220×148×58.5/289×212×105		245×170×63.5/334×255×123			

## System connection diagram

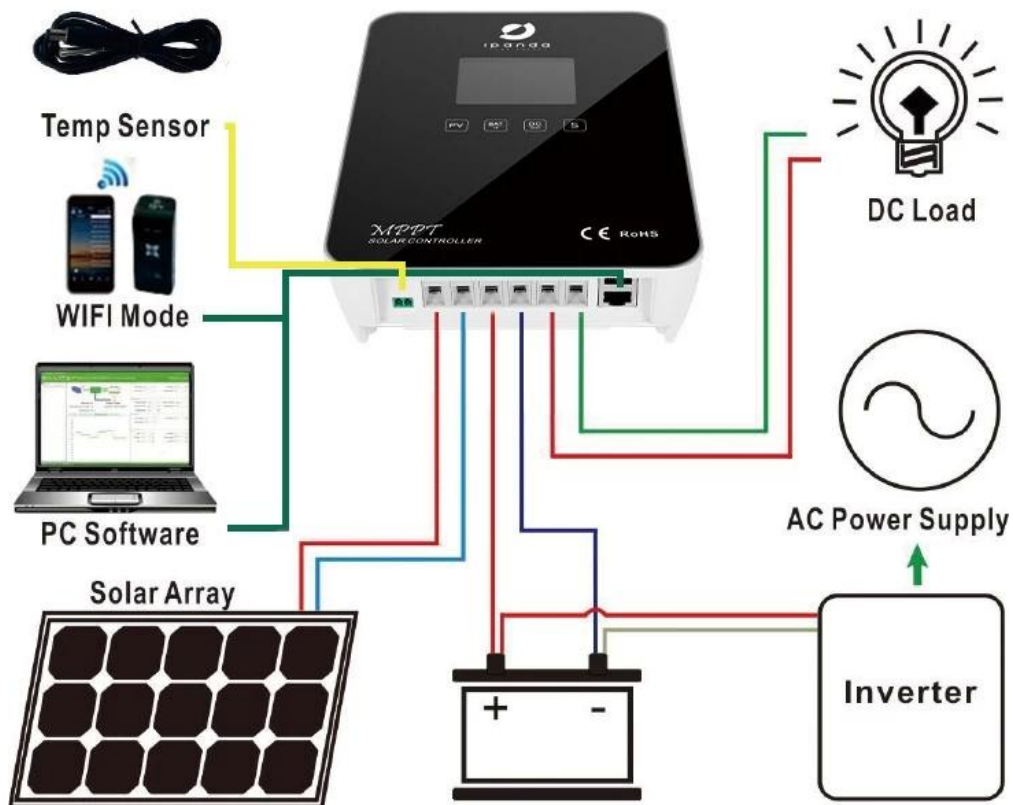

### Remarks:

1. The above is the standard parameters of the company. If there are any changes, please check our official website;
2. Our company can customize non-conventional MPPT controllers for customers and provide OEM and ODM services;
3. [[Click to download the specification](#)]